



P-780

©2008





-
-
-



Arial

[] []

{ x | y | ... }

[x | y | ...]

//


1.



2.



3.



Enter a

a

“ → ”

→

1+ 2
“ Alt ” “ A ”

Ctrl+Alt+A “ Ctrl ”

1 2 Alt F Alt
F

1		3
1.1		3
1.2		3
1.3	BSSID	4
1.4		4
2		5
2.1	Super Brige	5
2.2	Super AP	5
2.2.1		5
2.2.2	Multiple BSSID (32 BSSID)	5
2.2.3	AAA.....	6
2.2.4		6
2.2.5		6
3		7
3.1	FCC	7
3.2	IC	8
4		9
4.1	AP + Bridge	9
4.2	AP + AP	9
4.3	Bridge+ Bridge	10
5		11
5.1		11

6.2.3	Wireless	22
6.2.4	System.....	22
6.3	Status	23
6.3.1	Status Device Status	23
6.3.2	Status Wireless Status	23
6.4	Network	25
6.4.1	Network Interface	25
6.4.2	Network RADIUS Servers.....	27
6.4.3	Network DHCP Settings	28
6.4.4	Network NTP Settings	32
6.4.5	Network Time Settings.....	35
6.5	Wireless	35
6.5.1	Wireless Basic.....	35
6.5.2	Wireless Advance.....	43
6.5.3	Wireless WEP	49
6.5.4	Wireless MAC ACL.....	50
6.6	System	53
6.6.1	System Security	53
6.6.2	System SNMP.....	53
6.6.3	System Telnet.....	55
6.6.4	System Configuration	55
6.6.5	System Reset.....	57
6.6.6	System Upgrade	58
7		59
7.1		59
7.2	RG-P-780	60
7.3		54 42T.....

1

RG-P-780

5GHz 2.4GHz



1.3 BSSID

32 BSSID BSSID BSSID
SSID 4 4 4 RADIUS VLAN ID 3 BSSID
802.1p tag 802.11e EDCA

2

2.1 Super Brige

- 802.11a/b/g 支持
- 108Mbps 支持
- 20 支持
- RF 支持
- WPA/PSK 支持
- 支持

2.2 Super AP

2.2.1

- DCA Dynamic Channel Allocation

2.2.2 Multiple BSSID (32 BSSID)

- BSSID SSID
- BSSID SSID
- BSSID AAA 802.1x web
- 802.1x Web
- BSSID
- WPA
- BSSID RADIUS
- BSSID

2.2.3 AAA

- **WE** RADIUS
- 802.1x EAP/TLS EAP/TTLS EAP/PEAP EAP/SIM

2.2.4

- 64/128 4 WEP
- WPA/TKIP WPA/AES
- MAC ACL

3

	MSS	œ 5.15 « 5.25GHz	ŏ 5GHz	34
48 ŏ		£		

3.1 FCC

5.15 5.25GHz

山

山



Š RG-P-780

œ

2.4GHz œ

1 11 £

3.2 IC

-
-

Industry Canada

50 山

EIRP

山

山

山

5250-5350 MHz

山

4


RG-P-780

4.3 Bridge+ Bridge

Bridge + Bridge



11a Bridge + 11a Bridge

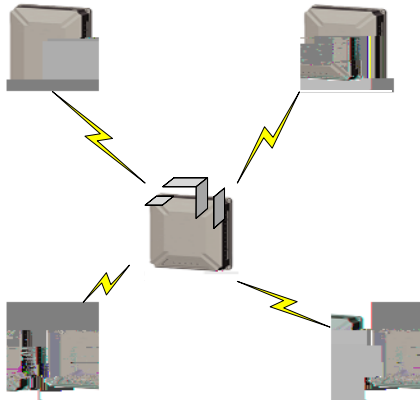

5

5.1

- RG-P-780
-
-
- RJ-45
- 2 A-807
-
- Ä RG-P-780
- Ä
- Ä
- Ä Adobe Acrobat Readers
- Ä Readme

☺	œ					£
&	RG-P-780	A-807	£ A-807	œ	š	£
		š		£		

5.2

5.2.1



RG-P-780

- 3

RG-P-780

- 山
- Reset RG-P-780 山

&	Reset	5	æ	丁
	Reset	5	æ	£

5.2.2

RG-P-780

- 山
RG-P-780山

- 山
- LAN RJ45 山
- Reset 山 M5 山


5.2.3 LEDs

RG-P-780 3

	LED			
1	LAN			RG-P-780
				RG-P-780
2	WLAN1			RG-P-780 WLAN1
				RG-P-780 WLAN1
3	WLAN2			RG-P-780 WLAN2
				RG-P-780 WLAN2

5.2.4 RF

RG-P-780 N RF

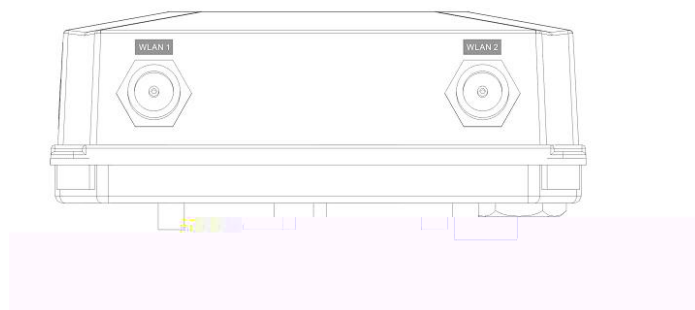



1	WLAN1	WLAN1
2	WLAN2	WLAN2

5.3

5.3.1 RG-P-780

RG-P-780

☺		RG-E-120		
	IEEE802.3af	POE	RG-P-780	£

1. RG-P-780



2.

RG-P-780

RG-P-780

山

Y
3.

RG-P-780

山

Z

RG-P-780

山
4.

RJ45

山



RJ45

£

5.

RG-P-780

LAN

山
6.


RF

RF

山

5.3.2

1. RG-P-780 IEEE802.3-2003 PoE
RG-E-120
2. RG-E-120 RG-P-780 LAN RG-E-120 PWR-LAN OUT
RG-E-120 LAN-IN hub

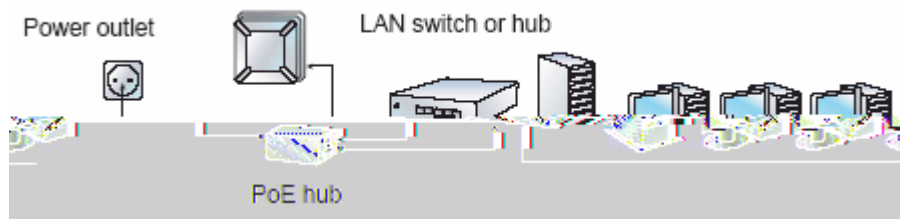


5.4

	IEEE 802.11b DSSS					IEEE 802.11g OFDM					IEEE 802.11a OFDM				
	802.11a	54	48	36	24	18	12	9	6Mbps	802.11g	54	48	36		
	24	12	9	6	11	5.5	2	1Mbps							
	100					500									
RF	Max. 17 dBm ± 1.5dBm @6~24Mbps Max. 13 dBm ± 1.5dBm @54Mbps domain										4	regulatory			
	802.11a/g - 1Mbps 10-5 BER @ -101dBm - 6Mbps 10-5 BER @ -90dBm - 9Mbps 10-5 BER @ -89dBm - 12Mbps 10-5 BER @ -88dBm - 18Mbps 10-5 BER @ -87dBm - 24Mbps 10-5 BER @ -83dBm - 36Mbps 10-5 BER @ -80dBm - 48Mbps 10-5 BER @ -74dBm - 54Mbps 10-5 BER @ -70dBm														
	N														
	WPA2	WPA	TKIP	AES	WEP64	WEP128									




Bridge	20 bridge link
LAN	10/100Mb RJ-45
WLAN1	N
WLAN2	N
	HTTPs Telnet SSHv2 SNMP
	HTTPs
	/
	180 mm x 160 mm x 58 mm
	1.5kg

Electrical Specification			
Frequency range	2400~2484 MHz	Peak gain	14.5 dBi
Gain	20.0 dBi	VSWR	2.0 : 1 Max.
Polarization	Linear, vertical	Power handling	2 W (cw)
Impedance	50 Ohms	Connector	RP-N plug
Environmental & Mechanical Characteristics			
Survival wind speed	210 km/hr	Temperature	0°C to +70°C
Radome color	Gray	Weight	70 g

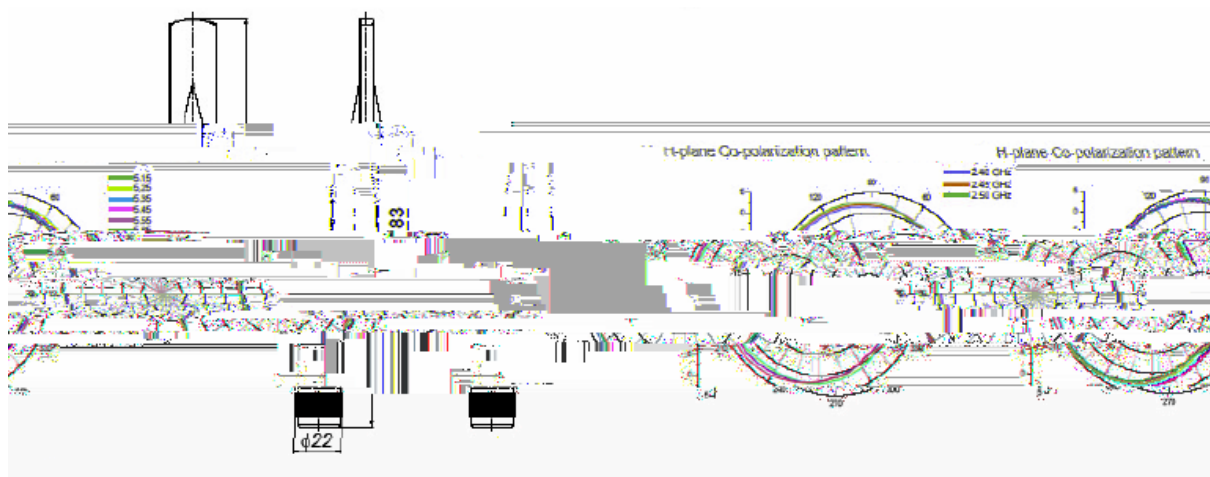

5.6

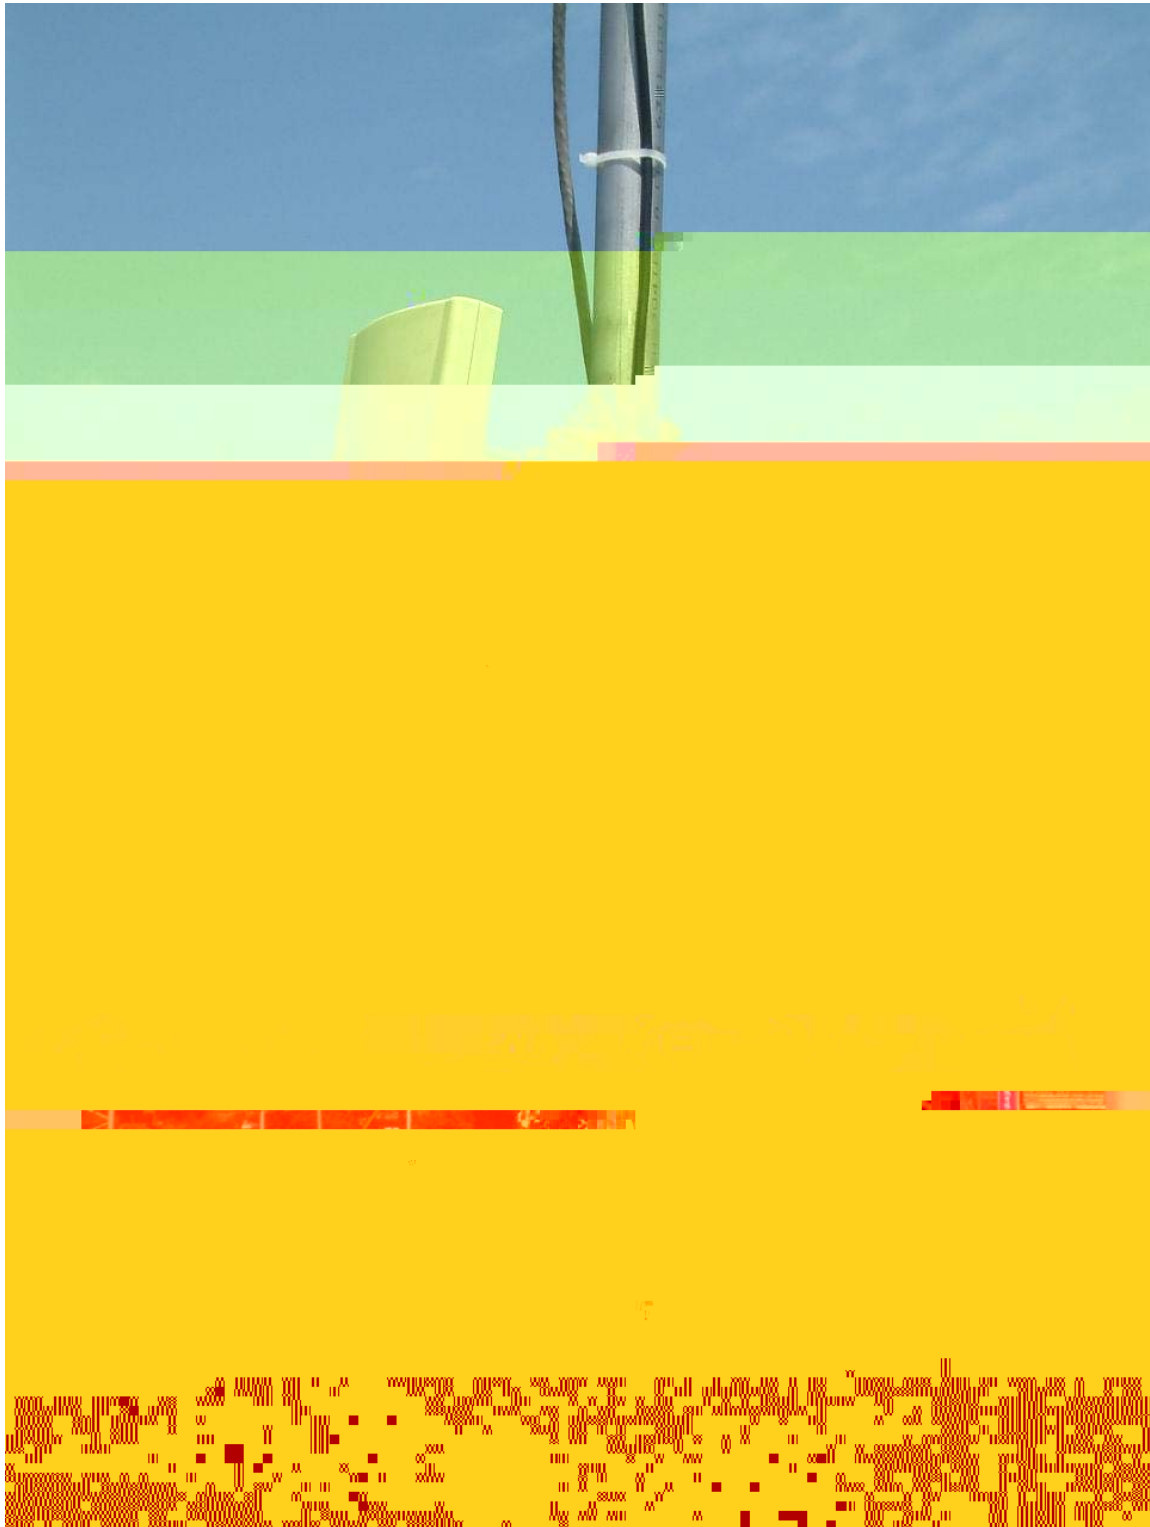



6 Web


6.1 Web

Web RG-P-780

1. IP RG-P-780
P-780 IP Ⅲ

<https://192.168.2.2/a.rg>

&

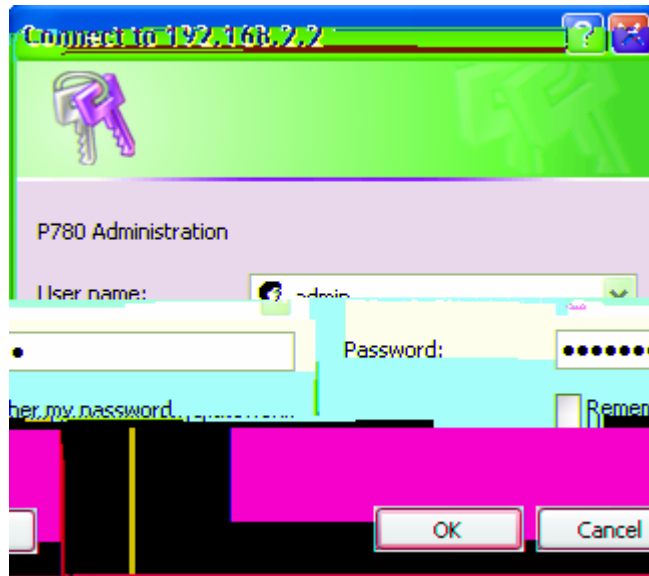

3. RG-P-780 Web



Web

- **Status** –
- **Network** –
- **Wireless** – RG-P-780
- **System** – RG-P-780
- **Exit** – exit web web

6.2 Web

6.2.1 Status

- **Device Status** –
- **Wireless Status** –

6.2.2 Network

- **Interface** – RG-P-780 LAN Bridge TCP/IP
- **RADIUS Server** – 802.1x WPA RADIUS
- **DHCP Settings**– DHCP server DHCP relay
- **NTP Settings** – NTP
- **Time Settings** –

6.2.3 Wireless

- **Basic** –
- **Advance** –Mutiple BSSID Bridge
- **WEP** – WEP WEP
- **MAC ACL** – RG-P-780 MAC ACL

6.2.4 System

- **Security** – RG-P-780
- **SNMP** – SNMP
- **Telnet** – Telnet/SSH
- **Configuration** – RG-P-780
- **Reset** –
- **Update** –

&

£

6.3 Status

6.3.1 Status | Device Status

Device Status

RG-P-780



System	
System Version	P-780.WHT.2.26.3428
Uptime	0 day(s) 00:00
System Time	2021/04/01/ 01:15
Wlan1	
Free System Memory	41,056 K bytes
Total System Memory	64,000 K bytes

◦ System Version

AP



&

firmware

æ

£

◦ Uptime –

[day(s) hours:minutes]

◦ System Time –

RG-P-780



◦ Wlan1 MAC / Wlan 2 MAC –

RG-P-780

MAC



◦ Free System Memory –



◦ Total System Memory –

RG-P-780



◦ LAN Mode –

RG-P-780

IP

IP

DHCP

IP



◦ LAN IP –

RG-P-780

IP



◦ LAN Mask –

RG-P-780



◦ Gateway –

RG-P-780



6.3.2 Status | Wireless Status

Wireless Status

RG-P-780



Radio1		
Channel	11	
Domain	WORLD	
Mode	AP	
Band	2.4GHz(Mixed 11g)	
Layer2 Isolation	disabled	
Total Connected Clients	0	
Antenna Gain	4dBi	
	Total Output Power(EIRP)	14dBm
	MAC ACL	disabled
Radio2		
Channel	60	
Domain	WORLD	
Mode	AP	
Band	5GHz(11a)	
Layer2 Isolation	disabled	
Total Connected Clients	0	
Antenna Gain	7dBi	
	Total Output Power(EIRP)	17dBm
	MAC ACL	disabled
Note:		

- Radio1 / Radio2 – 山
- Channel – 山
- Domain – RG-P-780 regulatory domain山
- Mode – AP Bridge 山
- Band – 山
- Layer2 Isolation – 2 山
- Total Connected Clients – 山
- Antenna Gain – 山 RG-P-780 A-807
2.4GHz 4dBi 5GHz 7dBi山
0dBi山
- Total Output Power (EIRP) – RG-P-780 EIRP 山

&

$$\text{EIRP} = \text{RF} + \text{Gain}$$

- MAC ACL – MAC ACL山



6.4 Network

- **Apply Changes –** **Interface** **⏏**
- **Discard Changes –** **⏏**
- Apply Changes** **RG-P-780** **⏏**

Network Interface Configuration				
IP Address	Netmask	Gateway Address	Protocol	Action
192.168.123.73	255.255.255.0	192.168.123.1	static	Edit

Note:

[Reboot](#)

Server needs to be restarted. Please reboot. ...

- **Reboot –** **RG-P-780** **⏏**

& æ **Reboot** £ æ

æ **Reboot** £ æ

Reboot **⏏**

Status	Network	Wireless	System
System Is Rebooting Now. Please Wait			
Note:			

100%

6.4.2 Network | RADIUS Servers

&

RADIUS servers

32

RADIUS Server £

RADIUS

RADIUS Server				
Name	ServerIP	ServerPort	Secret	Action
Note:				

◦ Add – RADIUS Ⅲ

Add RADIUS Ⅲ

RADIUS Server			
Name	ServerIP	ServerPort	Secret
profile1	192.168.123.152	1812	test
Save Cancel			
Note:			

◦ Name – RADIUS Ⅲ

◦ Server IP – RADIUS IP []Ⅲ

◦ Server Port – RADIUS [1-65535]Ⅲ

&

RFC 2138 ± Remote Authentication Dial-in User Service ǒ RADIUS Ǔ²
RADIUS 1812 £

◦ Secret – 3 ◦ Ⅲ°

- 0 **Edit** – RADIUS ⏏
- 0 **Delete** – RADIUS ⏏

Reboot — RG-P-780 3

£

28 / 63

DHCP Settings	
Name	Value
Status	Disabled
Edit	
Note:	

◦ **Edit** – 

DHCP server **DHCP relay** **Edit**  **DHCP** **DHCP**

DHCP Settings	
Name	Value
Status	Disabled

◦ **Status** – **DHCP** 

◦ **Disabled** – **DHCP** 

◦ **DHCP Server** – **DHCP Server** 

◦ **DHCP Relay** – **DHCP Relay** 

DHCP Server

DHCP Server
IP  **DHCP**

DHCP Settings	
Name	Value
Status	DHCP Server
IP Address from	192.168.123.2
IP Address to	192.168.123.254
Netmask	255.255.255.0
Gateway	192.168.123.1
WINS Address	0.0.0.0
lease time(seconds)	864000
Domain	
DNS Address	0.0.0.0
DNS Secondary Address	0.0.0.0
Save Cancel	
Note:	



&

æ RG-P-780

DHCP server £

- **IP Address from / IP Address to –** DHCP server IP

DHCP Settings		
Name	Value	
Status	DHCP Server	
IP Address from	192.168.123.2	
IP Address to	192.168.123.254	
Netmask	255.255.255.0	
Gateway	192.168.123.1	
WINS Address	0.0.0.0	
	lease time(seconds)	864000
	Domain	
	DNS Address	0.0.0.0
	DNS Secondary Address	0.0.0.0
		Edit
Note:		
Reboot Server needs to be restarted. Please reboot.		

Reboot – RG-P-780

Reboot

RG-P-780 DHCP IP DHCP server

RG-P-780 DHCP IP

Warning: DHCP server and DHCP relay cannot be set when AP as a DHCP client itself.	
DHCP Settings	
Name	Value
Status	Disabled
Note:	

DHCP Relay

Server IP – DHCP IP

&

DHCP Relay DHCP £

Save

DHCP Settings

Name	Value
Status	DHCP Relay
Server IP	192.168.2.1
	Edit
Apply Changes Discard Changes	

Note:

Web RG-P-780 Apply Changes

Reboot – RG-P-780

&

Reboot £



RG-P-780 DHCP IP DHCP relay £

6.4.4 Network | NTP Settings

NTP Network Time protocol NTP
Network| NTP Settings NTP

o	NTP status –	NTP	⏏
o	Time Zone –	NTP	⏏
o	Delete –	NTP	⏏
o	Edit –	NTP	⏏
o	Add –	NTP	⏏

Add NTP

&

RG-P-780

NTP

æ NTP

IP

£

Save 

NTD Server

Ntp Status: disable

Time Zone: GMT-12:00

Name	ServerIP	Action
Ntpserver-1	207.46.103.100	Delete Edit

[Add](#)

[Apply Changes](#) [Discard Changes](#)

Note:



NTP Server

Ntp Status:

disable

Time Zone:

GMT+08:00

Name	ServerIP	Action
Ntpserver-1	207.46.103.100	Delete Edit

Save

Cancel

Note:

Save



NTP Server

Ntp Status:

disable

Time Zone:

GMT+08:00

Action	Name	ServerIP
Delete Edit	Ntpserver-1	107.46.103.100

Add

Apply Changes

Discard Changes

Note:

Web

RG-P-780

Apply Changes

6.4.5 Network | Time Settings

Network | Time Settings



Date Configuration	
Date	2005/07/19
Time	13:51
Editrefresh	
Note:	

Basic Wireless Setting

Radio : wlan1

Name	Value
Domain	WORLD
Static Channel	11
Band	2.4GHz(Mixed 11g)
Total Output Power (EIRP)	14dBm
Antenna Gain	4dBi
RTS Threshold	2347 bytes
Layer2 Isolation	disabled
Mode	AP
Action	Exit Site Survey

Note:

DCA

Basic Wireless Setting

Radio : wlan1

Name	Value
Domain	WORLD
Auto Channel	1
Band	2.4GHz(Mixed 11g)
Total Output Power (EIRP)	14dBm

1. Basic Wireless Setting

2. Basic Wireless Setting

3. Basic Wireless Setting

4. Basic Wireless Setting

5. Basic Wireless Setting

6. Basic Wireless Setting

7. Basic Wireless Setting

8. Basic Wireless Setting

9. Basic Wireless Setting

10. Basic Wireless Setting

11. Basic Wireless Setting

12. Basic Wireless Setting

13. Basic Wireless Setting

14. Basic Wireless Setting

15. Basic Wireless Setting

16. Basic Wireless Setting

17. Basic Wireless Setting

18. Basic Wireless Setting

19. Basic Wireless Setting

20. Basic Wireless Setting

21. Basic Wireless Setting

22. Basic Wireless Setting

23. Basic Wireless Setting

24. Basic Wireless Setting

25. Basic Wireless Setting

26. Basic Wireless Setting

27. Basic Wireless Setting

28. Basic Wireless Setting

29. Basic Wireless Setting

30. Basic Wireless Setting

31. Basic Wireless Setting

32. Basic Wireless Setting

33. Basic Wireless Setting

34. Basic Wireless Setting

35. Basic Wireless Setting

36. Basic Wireless Setting

37. Basic Wireless Setting

38. Basic Wireless Setting

39. Basic Wireless Setting

40. Basic Wireless Setting

41. Basic Wireless Setting

42. Basic Wireless Setting

43. Basic Wireless Setting

44. Basic Wireless Setting

45. Basic Wireless Setting

46. Basic Wireless Setting

47. Basic Wireless Setting

48. Basic Wireless Setting

49. Basic Wireless Setting

50. Basic Wireless Setting

51. Basic Wireless Setting

52. Basic Wireless Setting

53. Basic Wireless Setting

54. Basic Wireless Setting

55. Basic Wireless Setting

56. Basic Wireless Setting

57. Basic Wireless Setting

58. Basic Wireless Setting

59. Basic Wireless Setting

60. Basic Wireless Setting

61. Basic Wireless Setting

62. Basic Wireless Setting

63. Basic Wireless Setting

64. Basic Wireless Setting

65. Basic Wireless Setting

66. Basic Wireless Setting

67. Basic Wireless Setting

68. Basic Wireless Setting

69. Basic Wireless Setting

70. Basic Wireless Setting

71. Basic Wireless Setting

72. Basic Wireless Setting

73. Basic Wireless Setting

74. Basic Wireless Setting

75. Basic Wireless Setting

76. Basic Wireless Setting

77. Basic Wireless Setting

78. Basic Wireless Setting

79. Basic Wireless Setting

80. Basic Wireless Setting

81. Basic Wireless Setting

82. Basic Wireless Setting

83. Basic Wireless Setting

84. Basic Wireless Setting

85. Basic Wireless Setting

86. Basic Wireless Setting

87. Basic Wireless Setting

88. Basic Wireless Setting

89. Basic Wireless Setting

90. Basic Wireless Setting

91. Basic Wireless Setting

92. Basic Wireless Setting

93. Basic Wireless Setting

94. Basic Wireless Setting

95. Basic Wireless Setting

96. Basic Wireless Setting

97. Basic Wireless Setting

98. Basic Wireless Setting

99. Basic Wireless Setting

100. Basic Wireless Setting

Exit Site Survey

Note:

&

5GHz 11a 5GHz Turbo Mode 11a æ 5GHz æ 802.11a
 £ 5GHz 11a Turbo Mode 11a æ 108Mbps £
 Bridge Turbo Mode 11a £

&

2.4GHz 11g 2.4GHz 11g only æ 2.4GHz
 £ 2.4GHz 11g only 11g æ 2.4GHz 11g
 11b/11g £

&

2.4GHz 11g WiFi 2.4GHz 11g only WiFi æ WiFi
 £

- **Total Output Power (EIRP) –** dBm


7	17dBm	16dBm	15dBm	14dBm	10dBm	4dBm	0dBm
---	-------	-------	-------	-------	-------	------	------
- **Antenna Gain –** RG-P-780 11 P-780 A-807
- **CELEST/** 2.4GHz 4dBm

Basic Wireless Setting		
Name	Value	
Radio Name	wlan1	Radio Name
Domain	WORLD	Domain
Channel	11	Channel
Band	2.4GHz(Mixed 11g)	Band
Output Power (EIRP)	14 dBm	Total Output Power (EIRP)
Antenna	A-807	
RTS Threshold	2347 bytes [0..2347]	RTS Threshold
DCA Threshold	0 mins	☐ Enable DCA
DCA optional channel	☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☐ 7 ☐ 8 ☐ 9 ☐ 10 ☐ 11 ☐ all	
Layer2 Isolation	disabled	
Mode	AP	
Save Cancel		
Note:		

DCA

Basic Wireless Setting	
Name	Value
Radio Name	wlan1
Domain	WORLD
Channel	1
Band	2.4GHz(Mixed 11g)
Output Power (EIRP)	14 dBm
Antenna	A-807
RTS Threshold	2347 bytes [0..2347]
DCA Threshold	10 mins ☒ Enable DCA
DCA optional channel	☐ 1 ☐ 2 ☐ 3 ☒ 4 ☐ 5 ☐ 6 ☐ 7 ☒ 8 ☐ 9 ☐ 10 ☐ 11 ☐ all
Layer2 Isolation	disabled
Mode	AP
Save Cancel	
Note:	

- Radio Name P-780
- Domain regulatory domain
- 2.4 GHz 5 GHz

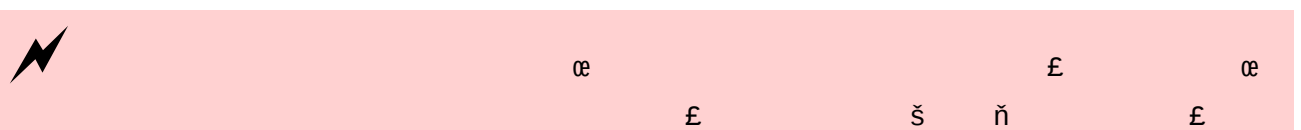

- Channels P-780 Regulatory Domain

£ DCA 2.4GHz £

- **DCA threshold** DCA 山
山 RG-P-780
山

☺ æ æ DCA
£
æ £
DCA £

& DCA ð site survey ðæ
P-780 £

- **DCA optional channel** DCA 山

& DCA æ DCA threshold DCA optional channel £

- **Layer 2 Isolation** 山
山 MAC [enabled/disabled]山
- **Mode** AP Bridge 山

⚡ Bridge æ P-780 æP-780 £
æ Bridge P-780 £

- **Save –** 山
Save 山

Basic Wireless Setting	
Radio :	wlan1
Name	Value
Domain	WORLD
Static Channel	11
Band	2.4GHz(Mixed 11g)
Total Output Power (EIRP)	14dBm
Antenna Gain	4dBi
RTS Threshold	2347 bytes
Layer2 Isolation	disabled
Mode	AP
Action	Edit Site Survey

Note:

DCA

Basic Wireless Setting	
Radio :	wlan1
Name	Value
Domain	WORLD
Auto Channel	auto
Band	2.4GHz(Mixed 11g)
Total Output Power (EIRP)	14dBm
Antenna Gain	4dBi
RTS Threshold	2347 bytes
DCA Threshold	10 mins
Layer2 Isolation	disabled
Mode	AP
Action	Edit
Site Survey	
Discard Changes	Apply Changes

Apply Changes –



Apply Changes



Discard Changes –



DCA

&

±

2

±

DCA

2

£

Basic Wireless Setting

Radio :	wlan1
Name	Value
Domain	WORLD
Channel	11
Band	2.4GHz(Mixed 11g)
Total Output Power (EIRP)	14dBm
Antenna Gain	4dBi
RTS Threshold	2347 bytes
Layer2 Isolation	disabled
Mode	AP

Edit

Site Survey

Action

Note:

Reboot

Server needs to be restarted. Please reboot.

- Edit Edit
- Reboot

Reboot

Save

Reboot

Edit

Save

Reboot

6.5.2 Wireless | Advance

RG-P-780 Multiple BSSID

AP

New

Edit**MBSSID**[illegible]

- | | | | | |
|-----------|---------|-----------------|--------------|---------|
| Radio | – | [wlan1/wlan2] | | W |
| Mode | – | RG-P-780 | [AP/Bridge]W | |
| Interface | – | MBSSID Bridge | | W |
| SSID | – | W | | 32 W |
| | SSID | P-780 | W | AP SSID |
| | W | | | |
| | AP SSID | W | | |

&	MIBSSID	BSSID	Ō	SSID £	BSSID	SSID £
BSSID	SSID	œ ± - ^	± _ ^£			
◦	Hidden SSID –					
	SSID	BSSID	Beacon	WTTT 1 Fd/1 Fdisj	AP	TtT 1 Fd) 0 Tw 7.4 0 Td4.
	[enable]	010EE0CF44E)				

- Dynamic Key Length – [64-bits / 128-bits] 山
- WPA – Wi-Fi Protected Access, 山 WPA RADIUS
- WPA2 – 山 WPA2 RADIUS 山 WPA 山
- WPA2 MIXED – 山 WPA2 WPA 山
- RADIUS Server Profile – RADIUS 山

Network | RADIUS Servers 山

- Algorithm – WPA WPA2 [TKIP/AES] 山
- Group Key Rekey interval – 山 山 10 山

☐ WPA-PSK		
	Use Pre-Shared Key:	
	Algorithm:	TKIP ▼
	Group Key Rekey Interval:	Minutes
☐ WPA2-PSK		
	Use Pre-Shared Key:	
	Algorithm:	TKIP ▼
	Group Key Rekey Interval:	Minutes
☐ WPA2-PSK MIXED		
	Use Pre-Shared Key:	
	Algorithm:	TKIP/AES
	Group Key Rekey Interval:	Minutes
☐ MAC Auth		
▼		RADIUS Server Profile:
RADIUS Server is NULL. Click here to add profile...		
☐ Disabled		

- WPA-PSK – RADIUS WPA 山 PMK 山
- WPA2-PSK – RADIUS WPA2 PSK AP WPA PSK 山 PMK 山
- WPA2-PSK MIXED – WPA2-PSK WPA-PSK AP
- Use Pre-Shared Key – 8-64 WPA 山
- Algorithm – TKIP, AES

Advance Wireless Setting	
Radio:	wlan2
Interface:	bridge2_1
Mode:	Bridge
Remote MAC:	00:90:4B:0C:42:06
Security:	WEP [KeyIndex: 1]
Return	
Note:	

Edit

bridge link

New

bridge link

Advance Wireless Setting	
Radio:	wlan2
Interface:	bridge2_0
Mode:	Bridge
Remote MAC:	00:00:00:00:00:00
Security:	☐ WEP(Wired Equivalent Privacy)
	WEP KeyIndex: 1
	☐ WPA-PSK
	Algorithm: TKIP
	Rekey Interval:
☒ Disabled	
Save Cancel	
Note:	

- Remote MAC – Bridge link MAC
- Security – WEP WPA-PSK(TKIP AES)

&

æ

WEP

± aaaa ²£

Radio Setting		
Radio:	wlan1	
WEP Configuration		
Index	Key	Action
Key 1	*****	Edit
Key 2	*****	Edit
Key 3	*****	Edit
Key 4	*****	Edit
The network password needs to be 64bits or 128bits depending on your network configuration. This can be entered as 5 or 13 ascii characters or 10 or 26 hexadecimal characters.		
Note:		

- Radio – [wlan1/wlan2]
- Edit – WEP

&

æ

WEP

± aaaa ²£

£

Radio Setting			
Radio:		wlan1	
WEP Configuration			
Action	Index	Key	
Save Cancel	Key 1		
Edit	Key 2	*****	
Edit	Key 3	*****	
Edit	Key 4	*****	
s depending on your network configuration. This can be entered as 5 or 13 ascii		The network password needs to be 64bits or 128bits depending on your network configuration. This can be entered as 5 or 13 ascii characters or 10 or 26 hexadecimal characters.	
Note:			

6.5.4 Wireless | MAC ACL

MAC ACL

RG-P-780

Wireless | MAC ACL

Radio Setting	
Radio:	wlan1
Policy Setting	
Policy	disabled Edit
MAC ACL Configuration	
MAC List	Action
Add	
Note:	

Radio – MAC ACL [wlan1/wlan2]

&

AP MAC ACL Bridge MAC
ACL

Policy Setting – edit Allow Deny Disable
ACL disabled P-780
ACL

&

Allow MAC MAC list AP
Deny AP
Deny MAC MAC list AP
Disabled ACL

Radio Setting	
Radio:	wlan1
Policy Setting	
Policy	Disabled Save Cancel
MAC ACL Configuration	
MAC List	Action
Add	
Note:	

ACL MAC a

Radio Setting	
Radio:	wlan1
Policy Setting	
Policy	deny
MAC ACL Configuration	
MAC List	Action
	MAC XX:XX:XX:XX:XX:XX is accepted
Save Cancel	

- MAC Address – MAC 00:AA:A2:5C:89:56]
- Save – MAC

Radio Setting	
Radio:	wlan1
Policy Setting	
Policy	deny
MAC ACL Configuration	
MAC List	Action
9	00:90:4B:00:02:19
Add Delete	
Apply Changes Discard Changes	

- Apply Changes –
- Discard Changes –

RG-P-780

Apply Changes

Apply Change

Radio Setting	
Radio:	wlan1
Policy Setting	
Policy	deny
MAC ACL Configuration	
MAC List	Action
00:90:4B:00:02:19	
Add Delete	
Note:	
Reboot	
Server needs to be restarted. Please reboot.	

- **Reboot – Reboot** 

&

œ Reboot £ œ

œ Reboot œ £

6.6 System

6.6.1 System | Security

System | Security

System | Security

UserName

Old Password

Confirm Password

Save

Cancel

Note: Administrator Password Setting

- **User Name –** RG-P-780 Web CLI 
- **Old Password –** 
- **New Password –**  [4-8]
- **Confirm Password –** 
- **Save –** 

&

œ š š admin š admin01

4-8 £

6.6.2 System | SNMP

- SNMP Internet  SNMP
- SNMP 

System | SNMP

SNMP



General Configuration		
Name	Value	Action
Readonly community	public	Reset
Readwrite community	private	Reset
DefaultTrap community	public	Reset

Trap Configuration		
Trap Type	Host IP	Host Port

Note: SNMP Configuration

- Readonly community** – SNMP v1 MIB SNMP v2c Read-only public MIB
 [1-32 ASCII]
- Readwrite community** – SNMP v1 MIB SNMP v2c MIB Read-write
 private [1-32 ASCII]
- Default Trap community** – Trap SNMP NMS
 public trap [1-32 ASCII]

- table [1-32 ASCII]
- Save –
- Cancel –

6.6.3 System | Telnet

System | Telnet RG-P-780 telnet/SSH


Telnet		
Name	Status	Action
Telnet Service	Enabled	Edit
SSH Service	Enabled	Edit
Note:		

- Telnet Service – RG-P-780 telnet
 - SSH Service – RG-P-780 SSH
- Enabled telnet/CLISH RG-P-780
- IETF SSH SSHv2

6.6.4 System | Configuration

System | Configuration

- Backup –
- Upload/Restore –



Preparation

Configuration Backup	
Description Message	Action
P-780.GSI.2.25.2919	Preparation

.cfg

Description Message

Preparation

Download

PC

Configuration Backup		
Message	Action	Description
and store Configuration backup file in safe place. Configuration file name should only include English characters or numbers.	Download	Download and
		Warning: Con
em Configuration		Note: Syst



æ

£

æ

RG-P-780 £

Browse

RG-P-780

Configuration Upload	
Description Message	Action
Configuration file to upload	Browse...
Upload Cancel	
Note: System Configuration Upload.	

Upload

Configuration Upload	
Configuration File Information	
HOST IP	192.168.2.2
HOST VERSION	P-780.GSI.2.25.2919
Create Time	Tue Jul 19 14:32:20 2005
Description	P-780.GSI.2.25.2919
Check it and Press OK , then device will reboot and the new configuration will take effect	
OK Cancel	
Note: System Configuration	

HOST IP –

IP

&

æ

IP

£

- HOST VERSION – 山

- OK – 山

OK

山

6.6.5 System | Reset

System Reset	
Description	Action
Current software version: P-780.GS1.2.25.2919	
Reboot device	Reboot
Restore the original configuration from factory.	Reset
Note: System Reboot, System Reset.	

- Reboot – 山

- Reset – 山

Reboot

System Reset	
Description	Action
Are you sure you want to REBOOT the device? It will take some time to boot up.	Reboot Cancel
Note: System Reboot, System Reset.	

Reset

System Reset	
Description	Action
Are you sure you want to RESET the device? It will take some time to boot up.	Reset Cancel
Note: System Reboot, System Reset.	

&

æ

£

£

6.6.6 System | Upgrade

&

œ

£

◦ Upload – firmware

Firmware Upgrade	
Description	Action
Current software version: P-780.GSI.2.25.2919	
Upgrade the firmware	Upgrade
Note: Firmware Upgrade	

Upload firmware image

Firmware Upgrade	
Description	Action
Browse... Firmware image	
Upload Cancel	Upgrade
Note: Firmware Upgrade	

Upgrade firmware image flash

&

RG-P-780

£

œ

£

Firmware Upgrade	
Description	Action
Firmware image successfully uploaded to server. Press Upgrade button to Upgrade image now and reboot server.	
	Upgrade Cancel
Note: Firmware Upgrade	



RG-P-780

œ

£

œ

£

£

&

4

7

7.1

	IEEE 802.11b DSSS	IEEE 802.11g OFDM	IEEE 802.11a OFDM



	/
--	---



DHCP	Disable
DHCP	Disable
NTP	Disable
Telnet	Enable
SSH	Enable
WLAN1	
	11g
Regulatory Domain	World
SSID	RG-P-780
	11
RTS	2347 bytes
RF	14dBm

7.3

7.3.1 802.11g

	(MHz)	USA, Canada (FCC)	European Union (CE/ETSI)	WORLD (CE/FCC)	Japan (TELEC)
1	2412				
2	2417				
3	2422				



40

5200