



©2000-2012





“ ”

“ ”

“ ”

“ ”


“ ”

A“ ”


B“Mini-GBIC ”



	AC			
	100-240V~			
	90-264V~			
	50-60Hz			
	6A			
POE	RJ45	POE	30W	POE
	24 PD <800W			
	PD <35W			
	h			

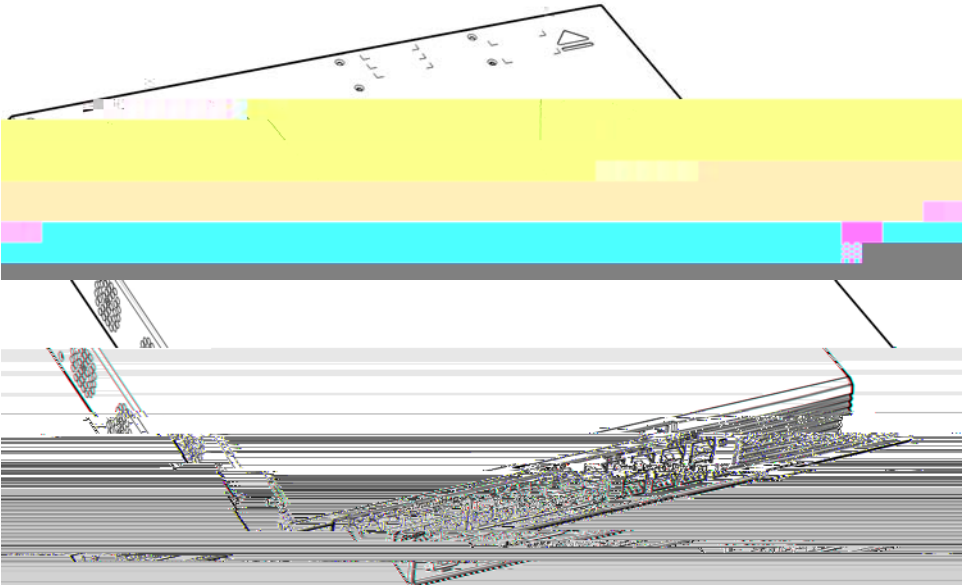



1-2 RG-S2924GT/8SFP-XS-P

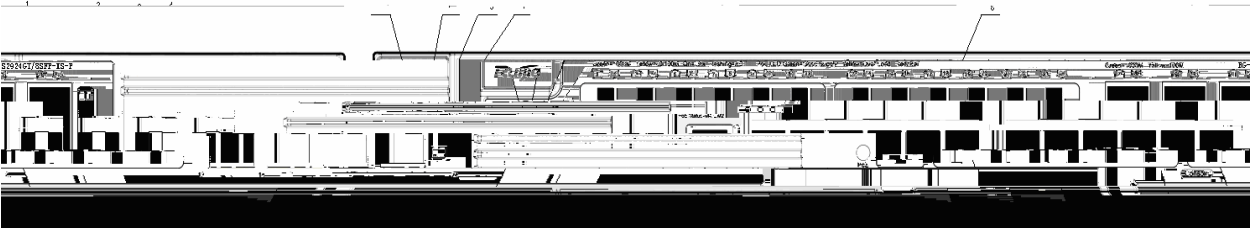

- | | | | |
|---|-----|---|--------------------|
| 1 | PoE | 6 | Console |
| 2 | | 7 | 10/100/1000Base-T |
| 3 | 1 | 8 | |
| 4 | 2 | 9 | 100/1000Base-X SFP |
| 5 | PoE | | |

1-3 RG-S2924GT/8SFP-XS-P

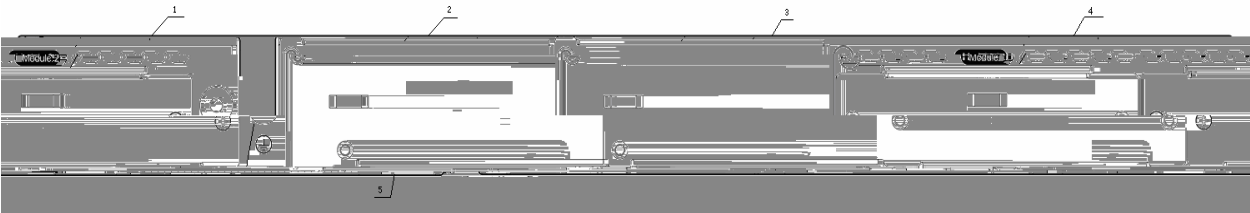



--	--

2

2.1

	RG-S2924GT/8SFP-XS-P
	

2.1.1

2.1.2

2.1.3

0°C-50°C	10%-90%
----------	---------



1.5m , 0.4m

2.2.3

2.2.8

1	RG-S2924GT/8SFP-XS-P	1	2-1
---	----------------------	---	-----

2.2.10 EMI

- 1)
- 2)
- 3)
- 4)


2.3

2.4

RG-S2924GT/8SFP-XS-P

2-2

2-2

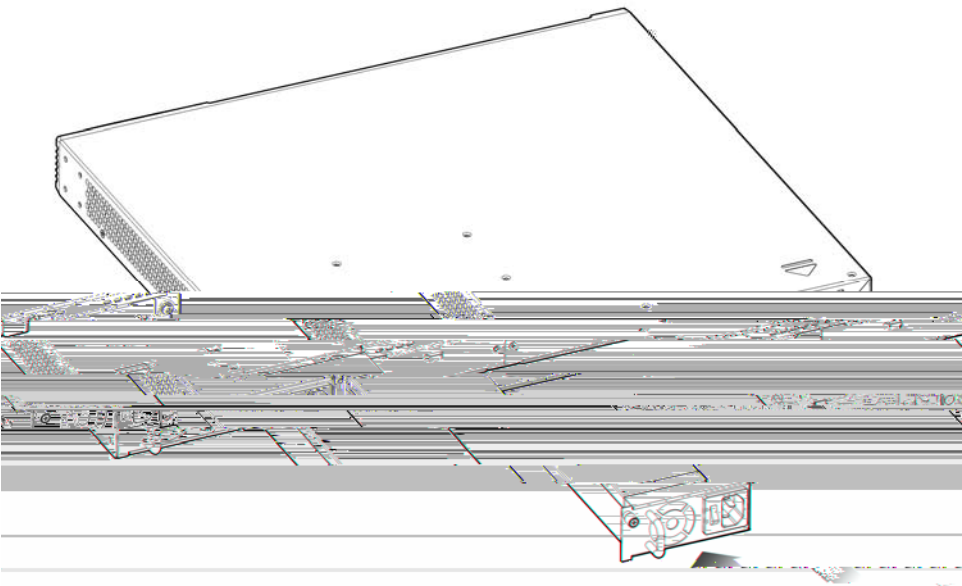


2.5

3



3.1

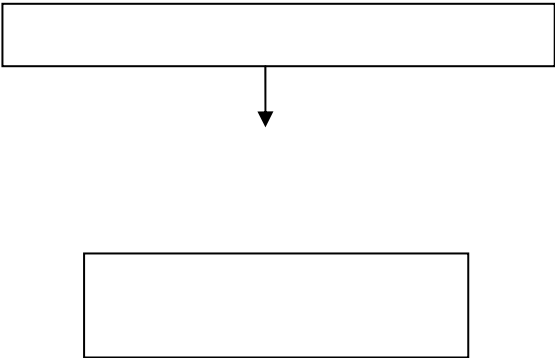

3.2


3.3 RG-S2924GT/8SFP-XS-P

10

3.3.1 19

RG-S2924GT/8SFP-XS-P EIA 19


3-1

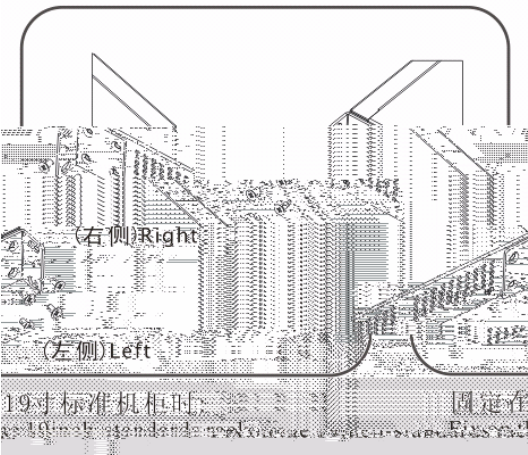

3.3.2

RG-S2924GT/8SFP-XS-P

3-2

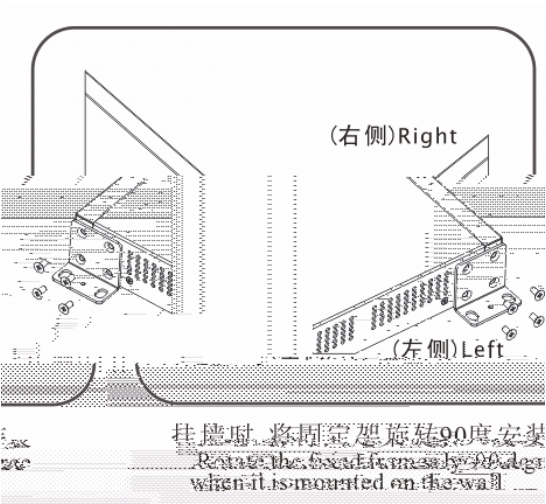

3.3.3

19

: 4

3.4



4

4.1

x



2) “ ”. 4-3


4-3



3) < > 4-4

4-4



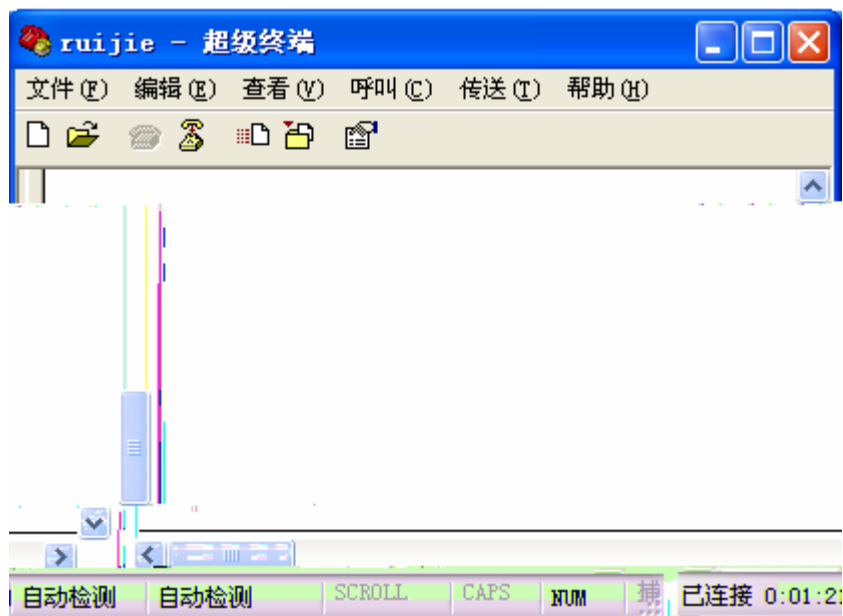

4.2

PC


A —

1000BASE-T/100BASE-TX/10BASE-T

1000BASE-T/100BASE-TX/10BASE-T MDI/MDIX Crossover

1000BASE-T	IEEE 802.3ab	100-ohm 5	5	UTP
STP	STP	1000BASE-T	4	
4	1000BASE-T	A-1		

A-1 1000BASE-T

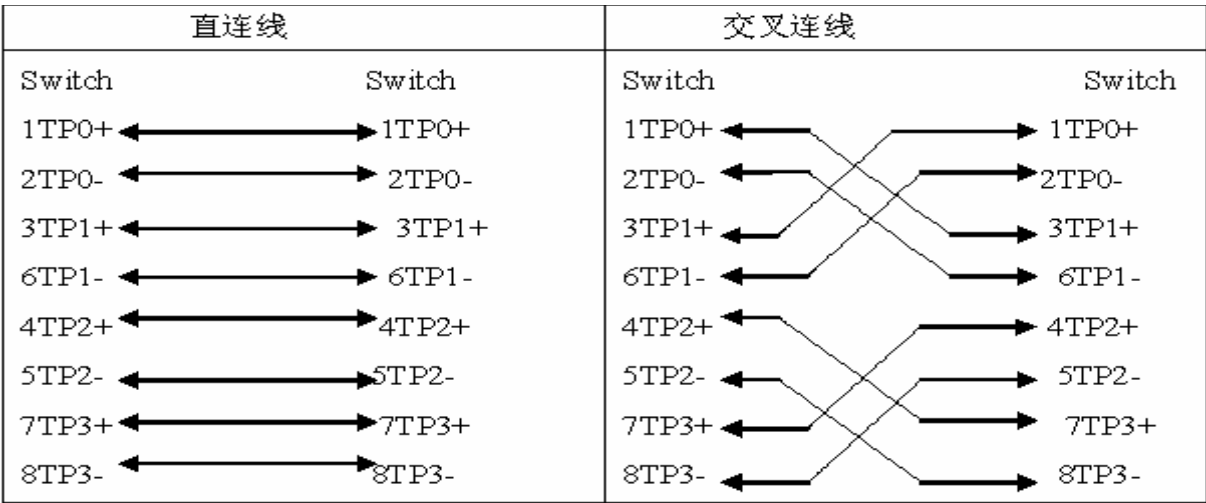


100BASE-TX/10BASE-T 10Mbps 100-ohm 3,4,5 100Mbps

100-ohm 5 100 100BASE-TX/10BASE-T


A-2

A-2 100BASE-TX/10BASE-T

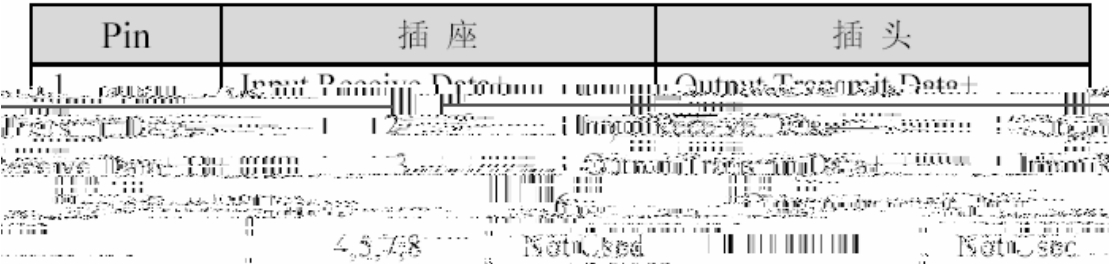


100BASE-TX/10BASE-T A-3

A-3 100BASE-TX/10BASE-T

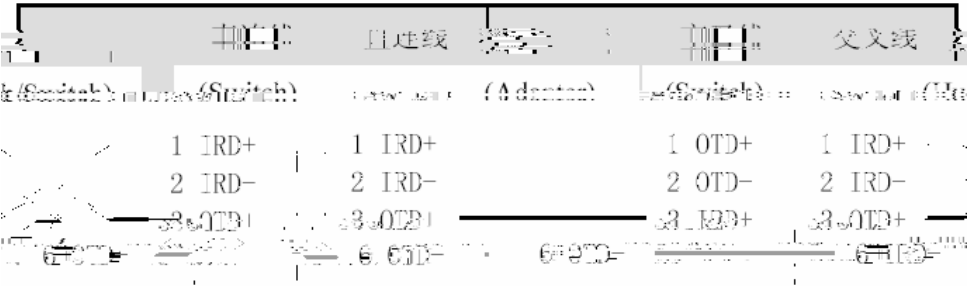

A-4

A-4

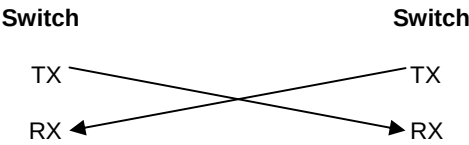

B

Mini-GBIC

SFP

SFP

Mini-GBIC

Mini-GBIC

SFP

B-1 SFP

Mini-GBIC	SFP	nm
-----------	-----	----