

RG-RSR10-01G-TD-LTE

copyright © 2022



-
-
-

-
-
-
-
-
-
-

<http://www.ruijie.com.cn>

<http://www.ruijie.com.cn/fw/>

7*24h <http://ocs.ruijie.com.cn>

7*24h 4008-111-000

-- <http://www.ruijie.com.cn/special/fw/tool/xryf/>



/

2.

1

RSR10-01G-TD-LTE V2.0

1.1 RSR10-01G-TD-LTE

1.1.1 RSR10-01G-TD-LTE

RSR10-01G-TD-LTE


32 RISC

RSR10-01G-TD-LTE

RSR10-01G-TD-LTE

TD-LTE 4G

RSR10-01G-TD-LTE

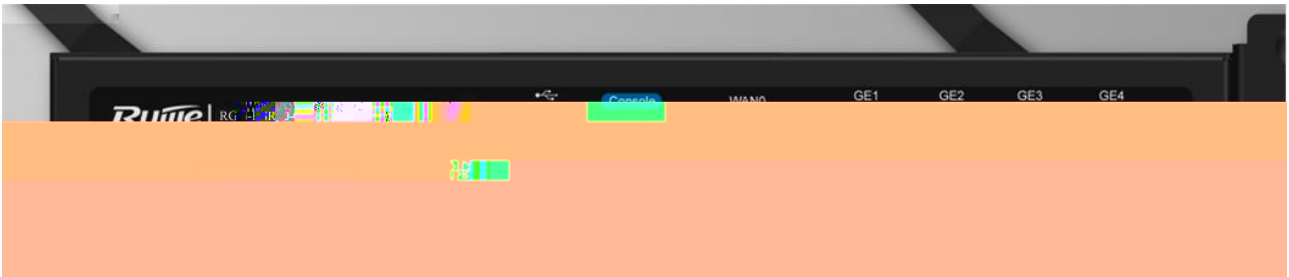

1.1.2 RSR10-01G-TD-LTE

■

1 WAN 4 LAN 1 console RJ45 1 USB 4G TD-LTE

■


■

■


■

1.1.3 RSR10-01G-TD-LTE


RSR10-01G-TD-LTE

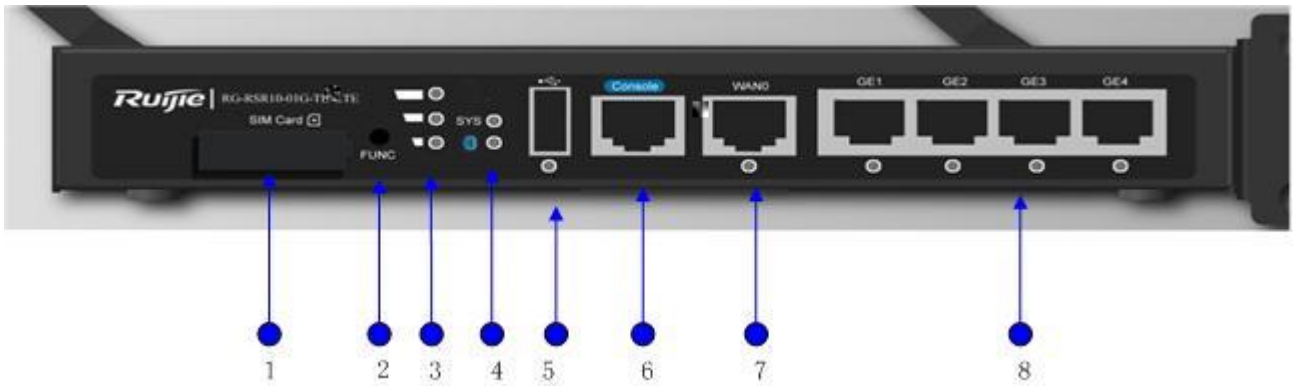

RSR10-01G-TD-LTE

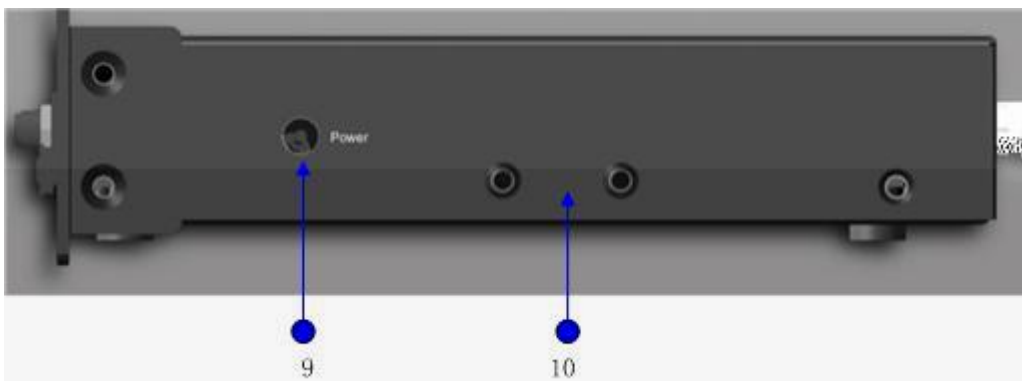

RSR10-01G-TD-LTE

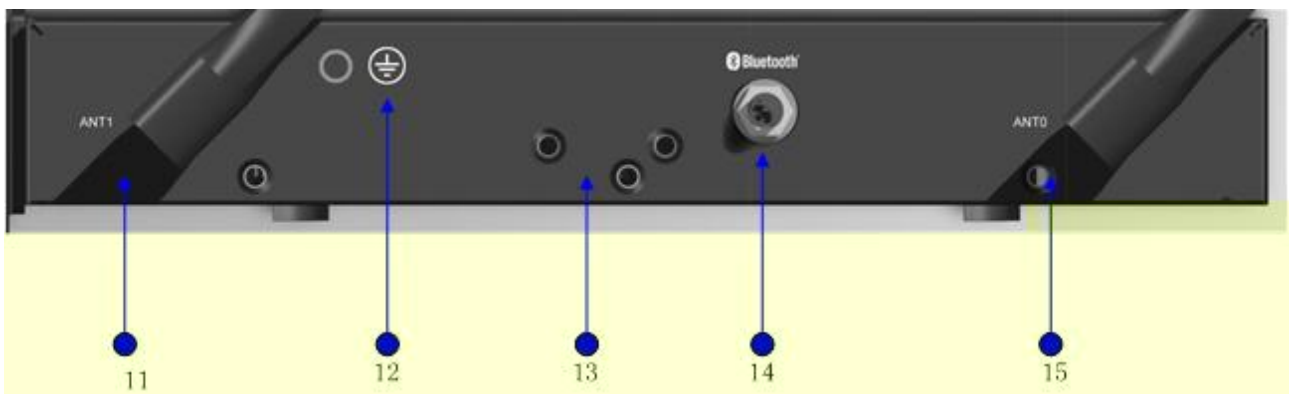

1	SIM	2	FUNC
3	RSSI	4	SYS/
5	USB USB	6	Console
7	GE WAN	8	GE LAN 1 4
9		10	
11	4G ANT1	12	
13		14	
15	4G ANT0		

RSR820-T

SYS	
bluetooth	
USB USB	USB USB
RSSI 4G	4G 4G 1 2 3
GE	link link

1.1.4 RSR10-01G-TD-LTE

RSR10-01G-TD-LTE

	RSR10-01G-TD-LTE
	1 WAN 4 LAN 1 console RJ45 1 USB 4G TD-LTE
	RISC
DDR3 RAM	512MB
Boot Rom	8MB

NAND FLASH	128MB
(W*H*D)	200mm*150mm*30mm
	100 240V 50~60Hz
	15W
	-10 60
	-40 85
	10 90%RH

RSR10-01G-TD-LTE

GE RJ45

RJ-45

8

UTP

	A	B
1		
2		
3		
4		

1.2.1

- RSR10-01G-TD-LTE
- RJ45 ARP 802.1Q
- X.25 HDLC PPP SLIP
- TCP/IP IP ICMP IGMP TCP UDP
- IP RIP V1/V2 OSPF V1/V2
- SNMP
- TELNET TELNET
- DHCP Server DHCP Client DHCP Relay TFTP
- VRRP
- PPPOE
- DNS DDNS
- X-MODEM
- NAT ACL AAA
- IPSEC L2TP PPTP

1.2.2

1.2.3

-
-

1.2.4

- DEBUG
-
- SNMP
-

- Console
- TELNET
-

1.2.5

- IP
- AAA RADIUS
- PPP PAP CHAP callback
-
- OSPF RIP V2
- NAT
- IPSEC/IKE
- GRE
- VLAN

1.2.6

- X-MODEM (Windows XP Windows NT UNIX DOS)
Console
- TFTP
- BOOTROM
- U

RSR10-01G-TD-LTE

- -10

-
-
-
-

2.2.4

-
-
-
-

2.2.5

-
-
-

2.2.6

/



18

24

2.2.7

- /
-
-

2.3

-
-
-
-
-
-
-
-
-
-
-




RSR10-01G-TD-LTE

- HUB
-
-

PC

3

3.1

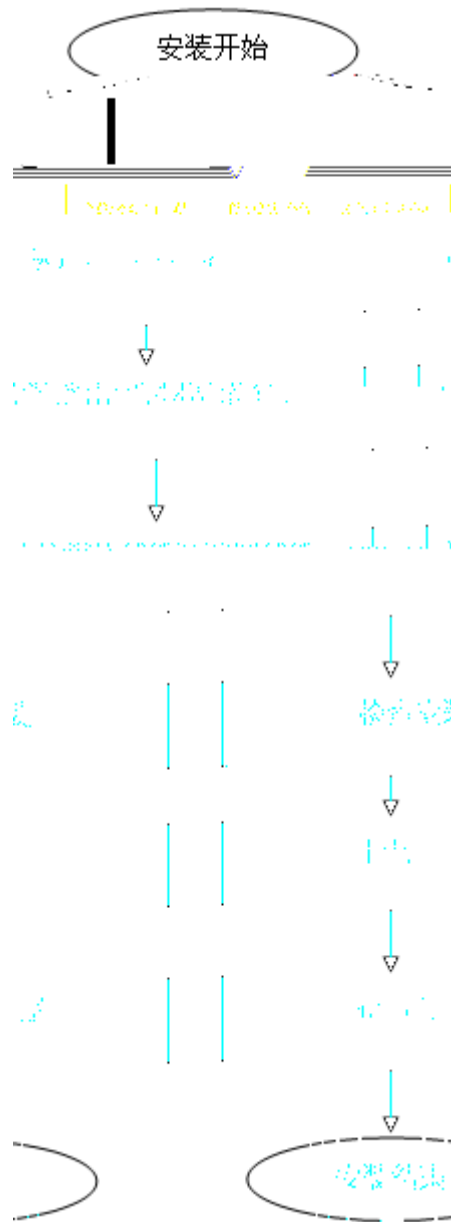

3.2

■

-
-
-

3.2.1

30mm

2




3.2.2

RSR10-01G-TD-LTE

30mm


2

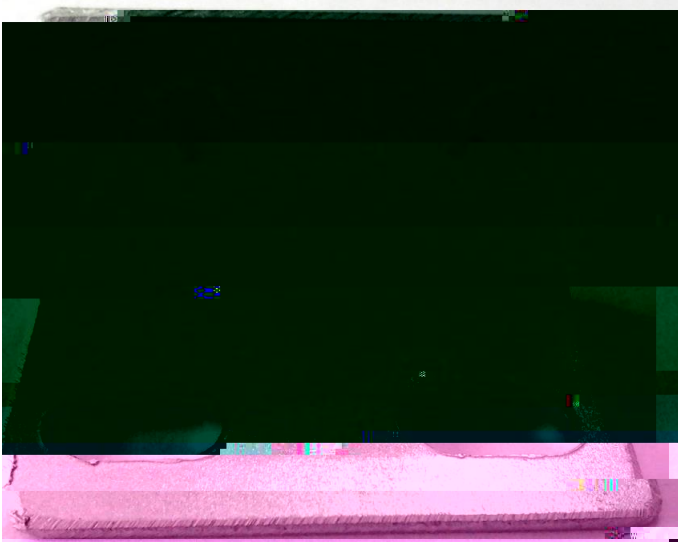

3.2.3

19

RSR10-01G-TD-LTE

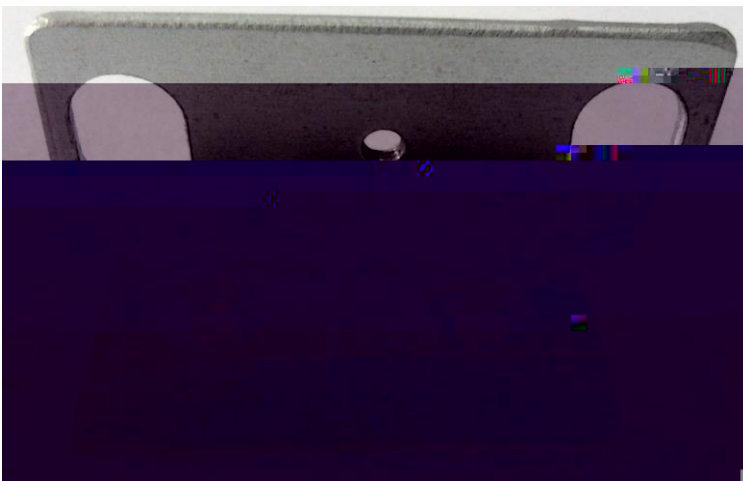

3.2.4


-
-
-

10cm

3.3 4G





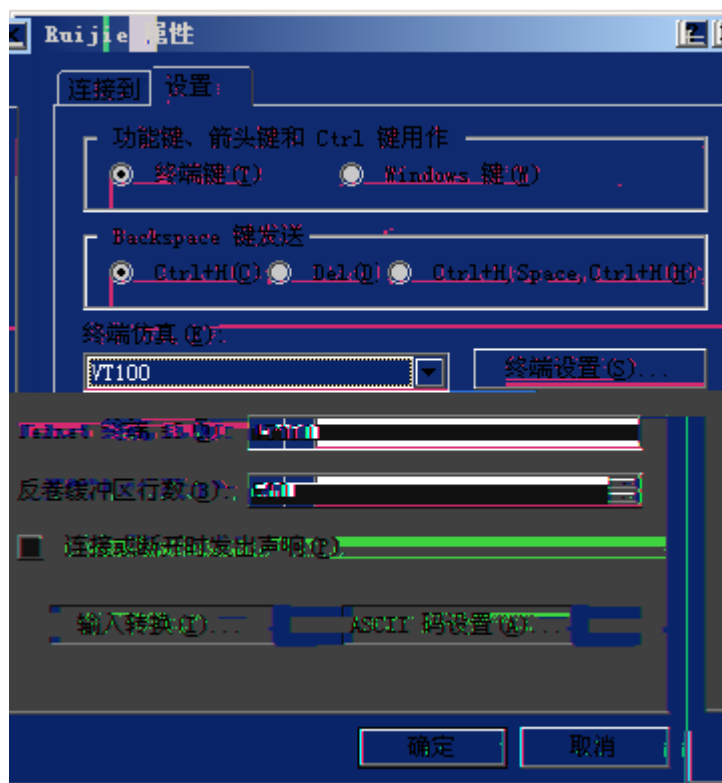

4.1.2

4.1.2.1

-
-
-

Copyright (c) 1998-2013s by Ruijie Networks.

All Rights Reserved.

Neither Decompiling Nor Reverse Engineering Shall Be Allowed.

*Jan 1 00:54:20: %MTD_DRIVER-5-MTD_NAND_FOUND: 1 NAND chips(chip size : 134217728) detected

*Jan 1 00:54:38: %DEVICE-5-CHANGED: Device RSR820-T (1) changed state to up.

*Jan 1 00:54:38: %USB-5-MODEM_FOUND: Modem <MC509> bind with tty 1.

*Jan 1 00:55:24: %SYS-5-WARMSTART: System coldstart.



4.2

5

5.1

RSR10-01G-TD-LTE

SYS

-
-
-
-

6

6.1

6.1.1 CONSOLE

CONSOLE RJ45 DB9F RJ45
 RJ45-DB9 PC DB9M

6- 1 CONSOLE

	1	2	
CONSOLE	DB9F RJ45	/	PC DB9M