




N <9

I > \$J \* . - ' <

I > F J ' ( ' % Ž\* Y ( Ožg \* ' .

M( % ' .

©2014



RGOS 10.4 (3b19)p3

- 
- 
- 

- <http://www.ruijie.com.cn/>
- <http://webchat.ruijie.com.cn>
- <http://www.ruijie.com.cn/service.aspx>
- 7× 24 4008-111-000
- <http://support.ruijie.com.cn>
- [service@ruijie.com.cn](mailto:service@ruijie.com.cn)



1)

[] []

{x|y|...}

[x|y|...]

//

2)



---

3)





-WEB

---

WEB

1. WEB

# 1 WEB

## 1.1 WEB

WEB IE  
WEB WEB WEB WEB  
WEB WEB IE

## 1.2

WEB

WEB	

## 1.3 WEB

WEB “ WEB ”




WEB Enable Enable

---

## 1.4 WEB


IP http://192.168.1.200,

1-1

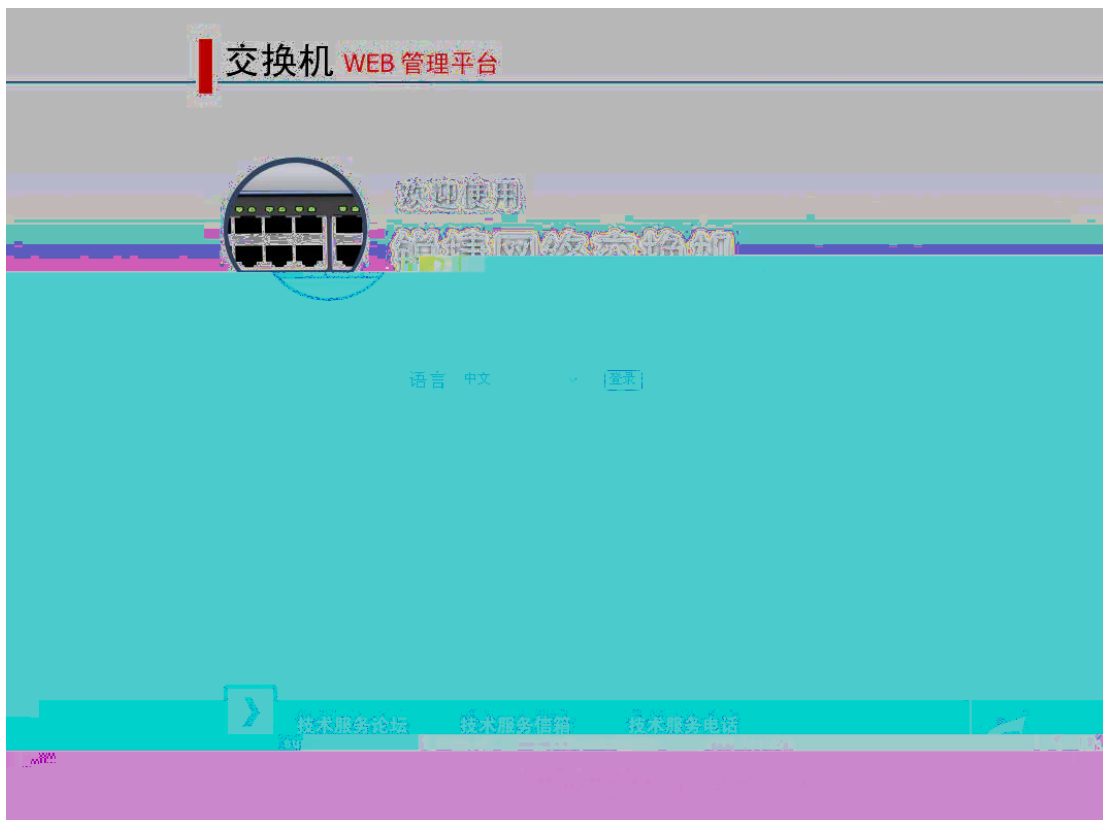


“ ”

1-2

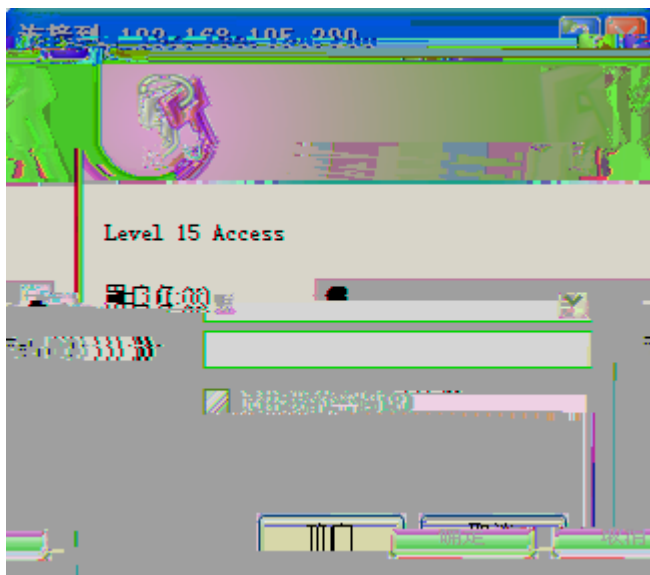

WEB

1-3 WEB

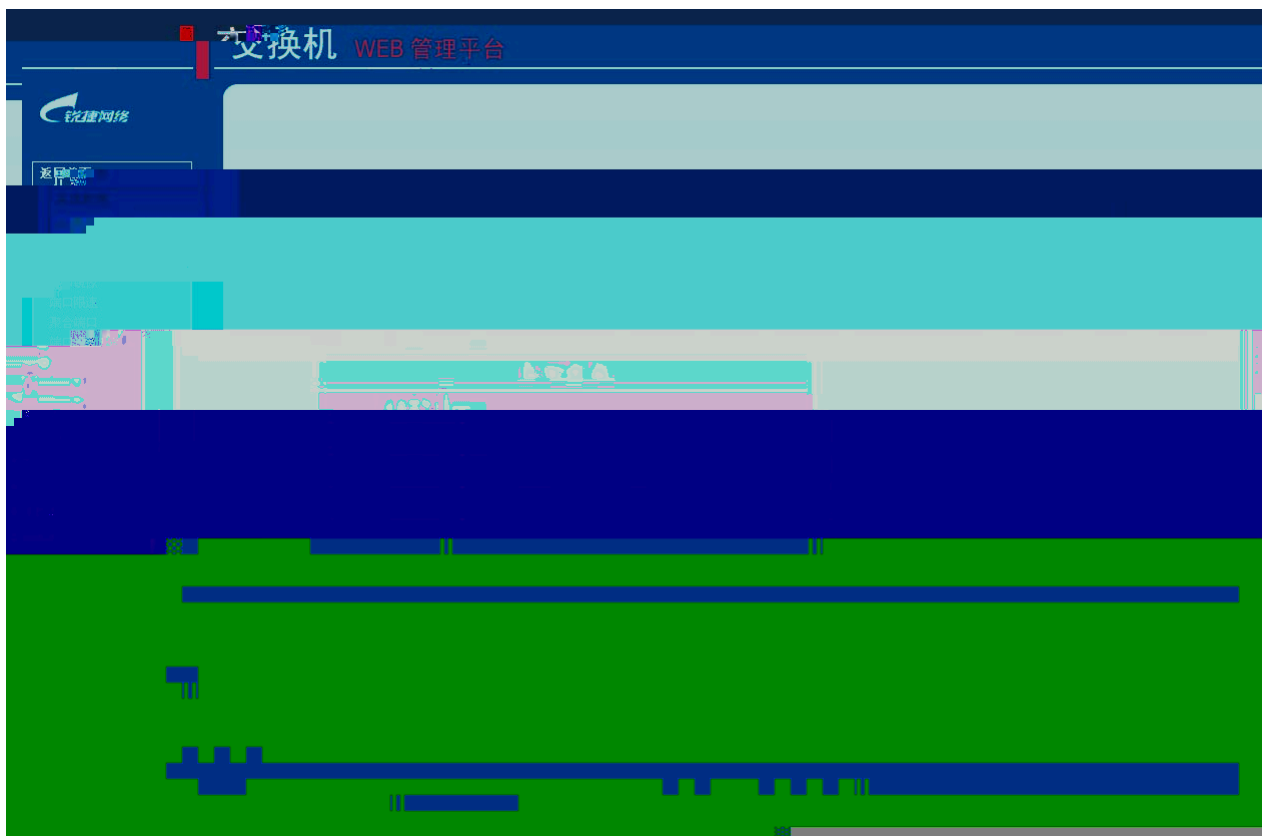


## 1.5

### 1.5.1 IP

“ IP ”


IP

1-4 IP

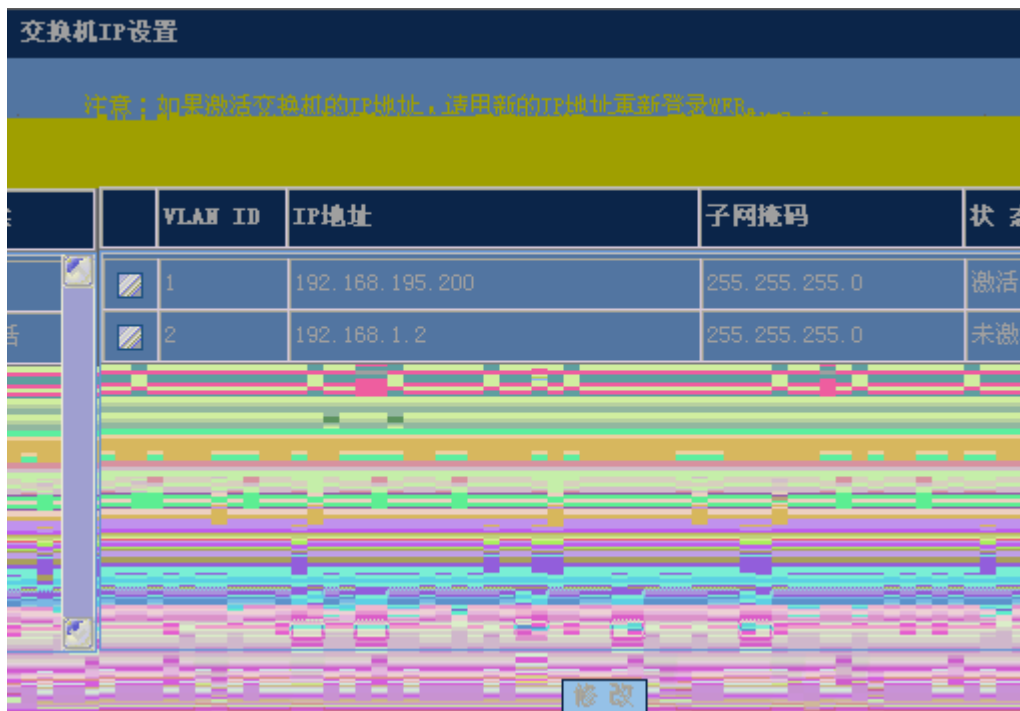

ip “ ”

1-5 IP

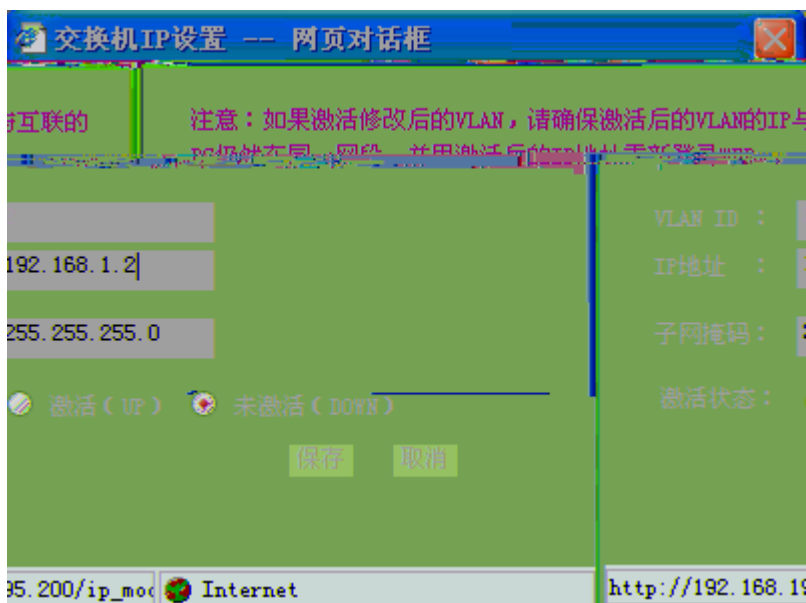


IP “ ”

## 1.5.2 VLAN

“ VLAN ”

■ VLAN

1-6 VLAN

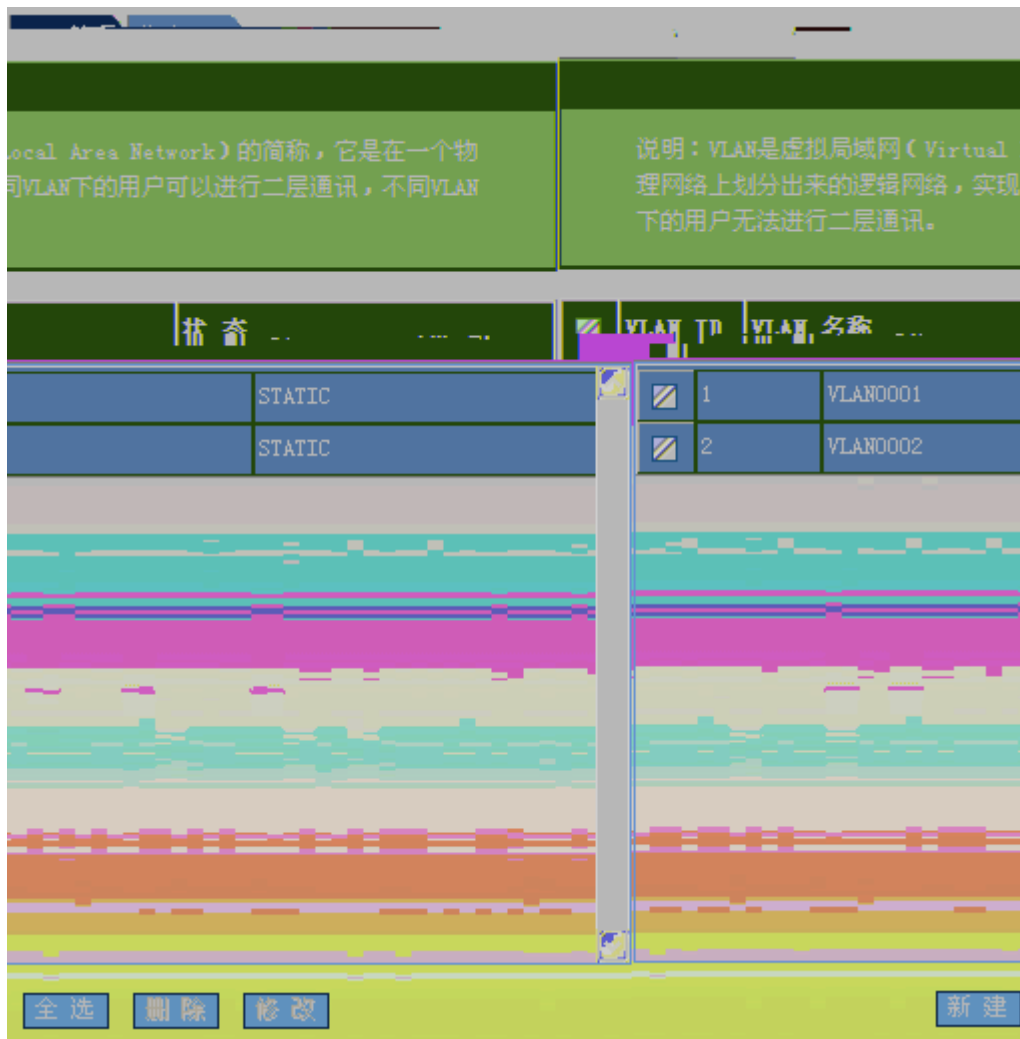


VLAN

VLAN

VLAN

“ ”

1-7 VLAN

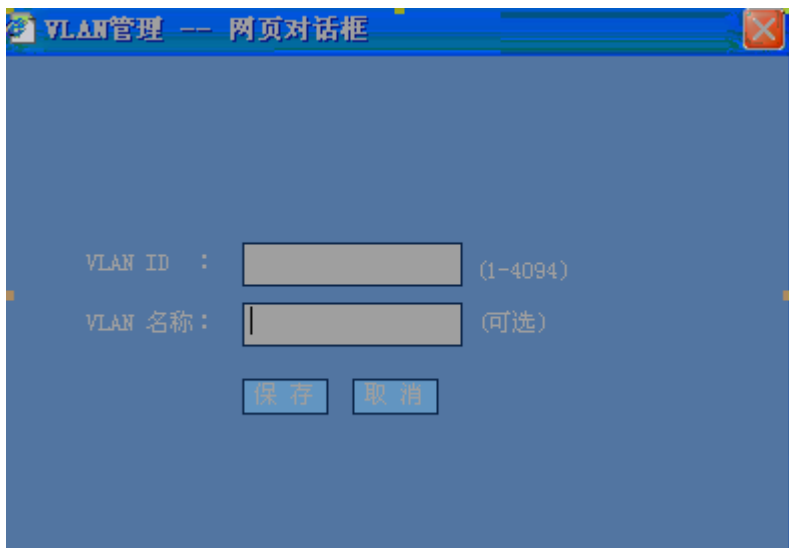

VLAN ID VLAN

“ ”

VLAN

VLAN


VLAN

“ ”

VLAN

“ ”

1-8 VLAN

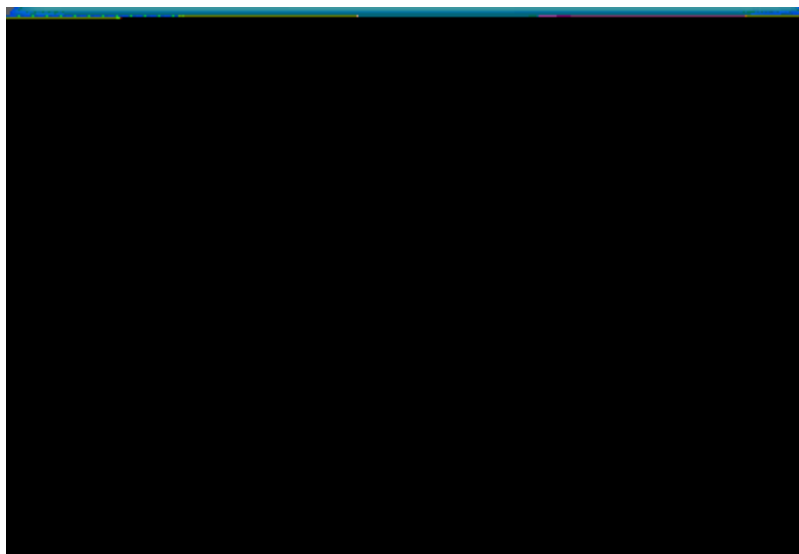


VLAN

“ ”

VLAN

■ VLAN

1-9 VLAN

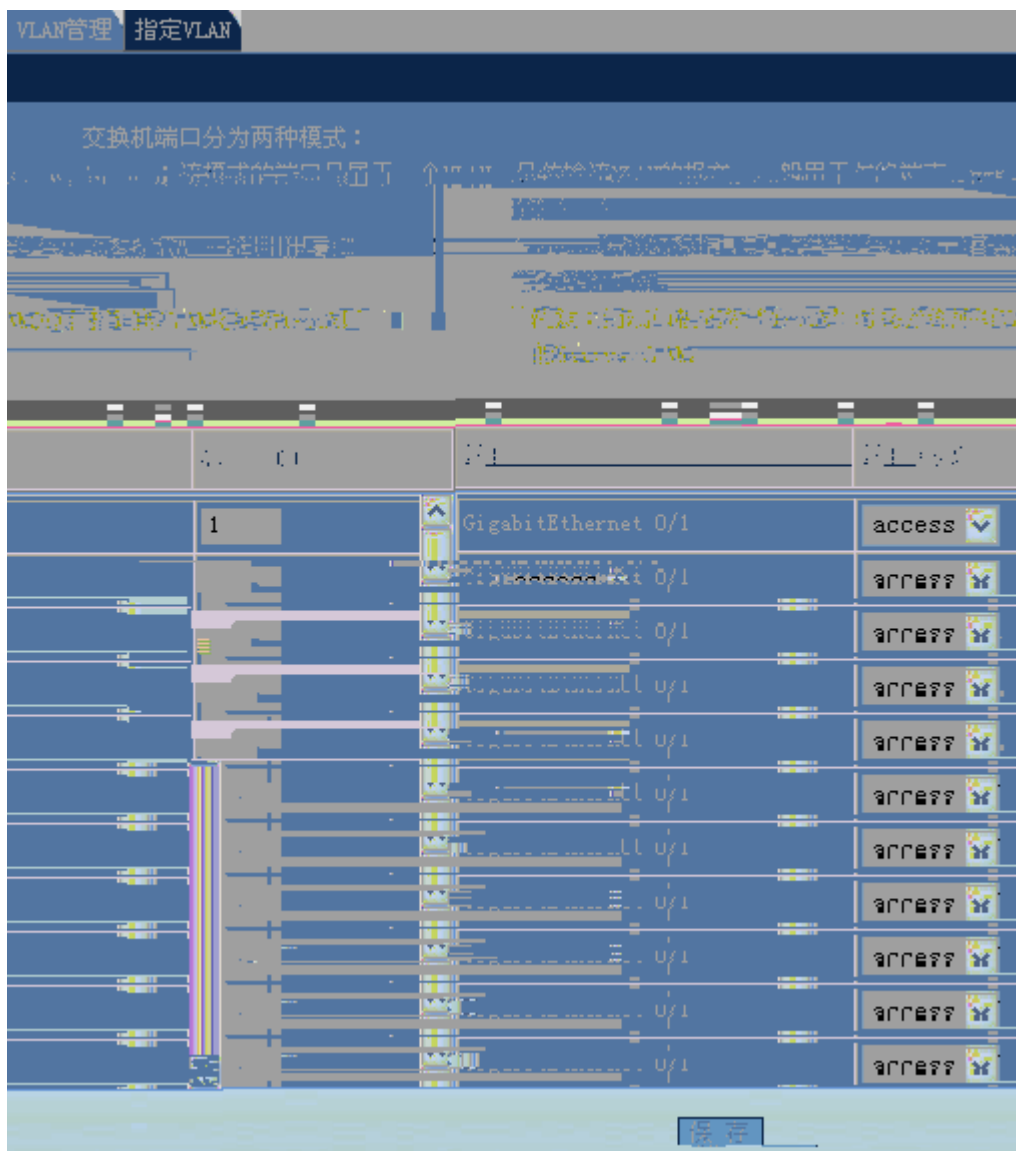


VLAN ID “ ”

### 1.5.3

“ ”

1-10

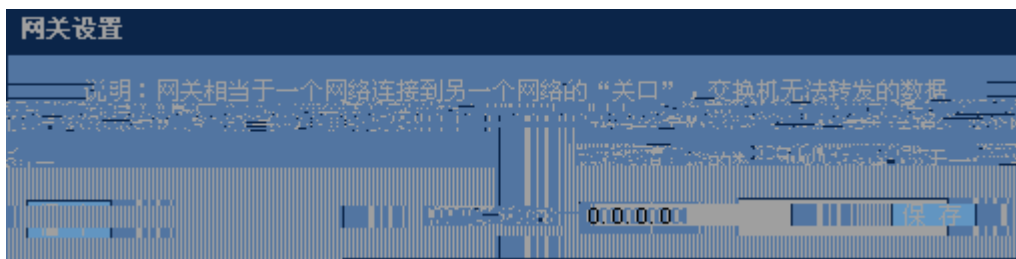


IP

IP “ ”

### 1.5.4

“ ”

1-11

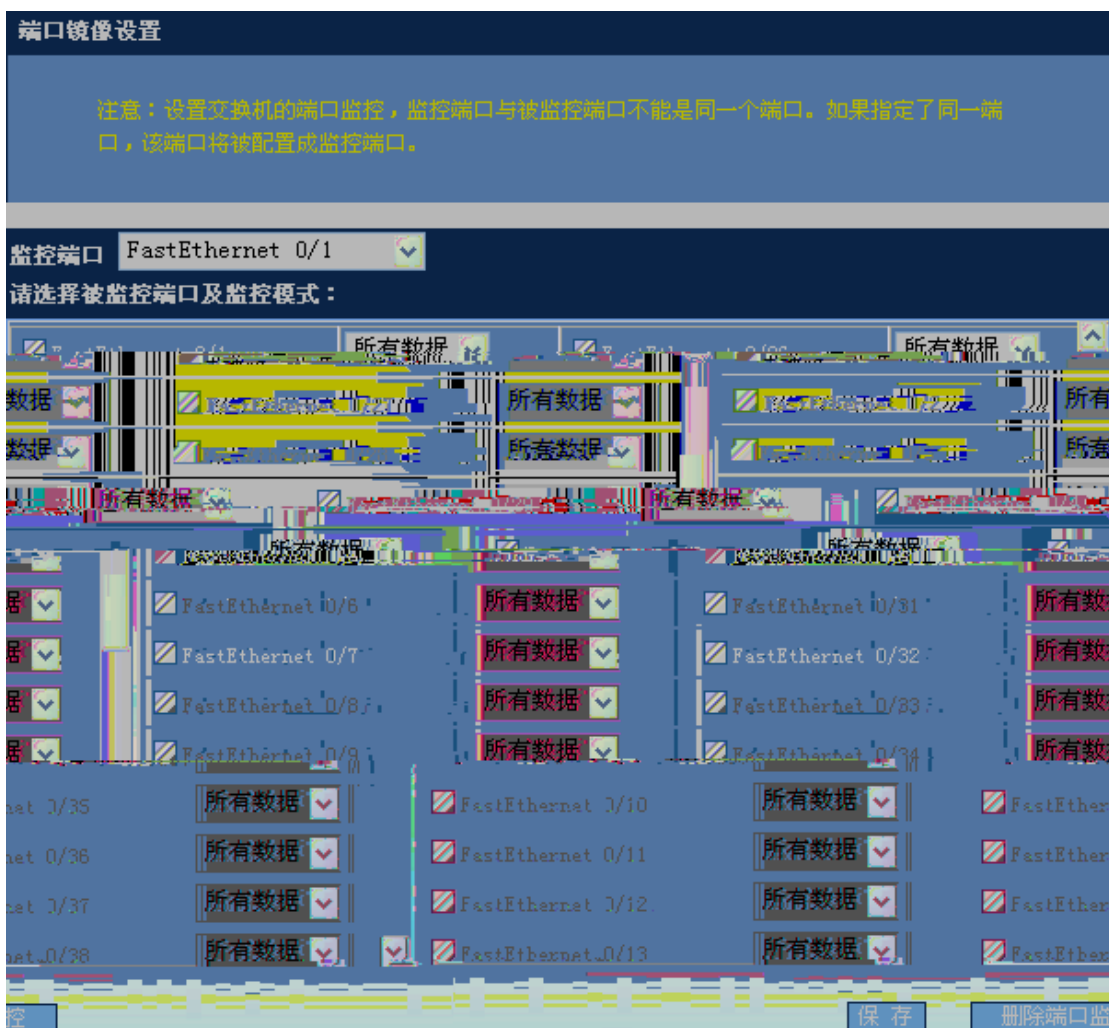

“ ”

“ ”

## 1.5.5

“ ”

1-12

### 端口限速设置

注意：不限速的端口，保持对应文本框为空（1byte=8bit）。S2900系列设备不支持对端口输入速率限制的设置。

端口	输出速率限制 (312-1000000 KBit/s)	输入速率限制 (312-1000000 KBit/s)
GigabitEthernet 0/1	<input type="text"/>	<input type="text"/>
GigabitEthernet 0/2	<input type="text"/>	<input type="text"/>
GigabitEthernet 0/3	<input type="text"/>	<input type="text"/>
GigabitEthernet 0/4	<input type="text"/>	<input type="text"/>
GigabitEthernet 0/5	<input type="text"/>	<input type="text"/>
GigabitEthernet 0/6	<input type="text"/>	<input type="text"/>
GigabitEthernet 0/7	<input type="text"/>	<input type="text"/>
GigabitEthernet 0/8	<input type="text"/>	<input type="text"/>
GigabitEthernet 0/9	<input type="text"/>	<input type="text"/>
GigabitEthernet 0/10	<input type="text"/>	<input type="text"/>
GigabitEthernet 0/11	<input type="text"/>	<input type="text"/>
GigabitEthernet 0/12	<input type="text"/>	<input type="text"/>
GigabitEthernet 0/13	<input type="text"/>	<input type="text"/>
GigabitEthernet 0/14	<input type="text"/>	<input type="text"/>
GigabitEthernet 0/15	<input type="text"/>	<input type="text"/>

保存
取消全部限速


“ ”

“ ”

### 1.5.6

“ ”

1-13

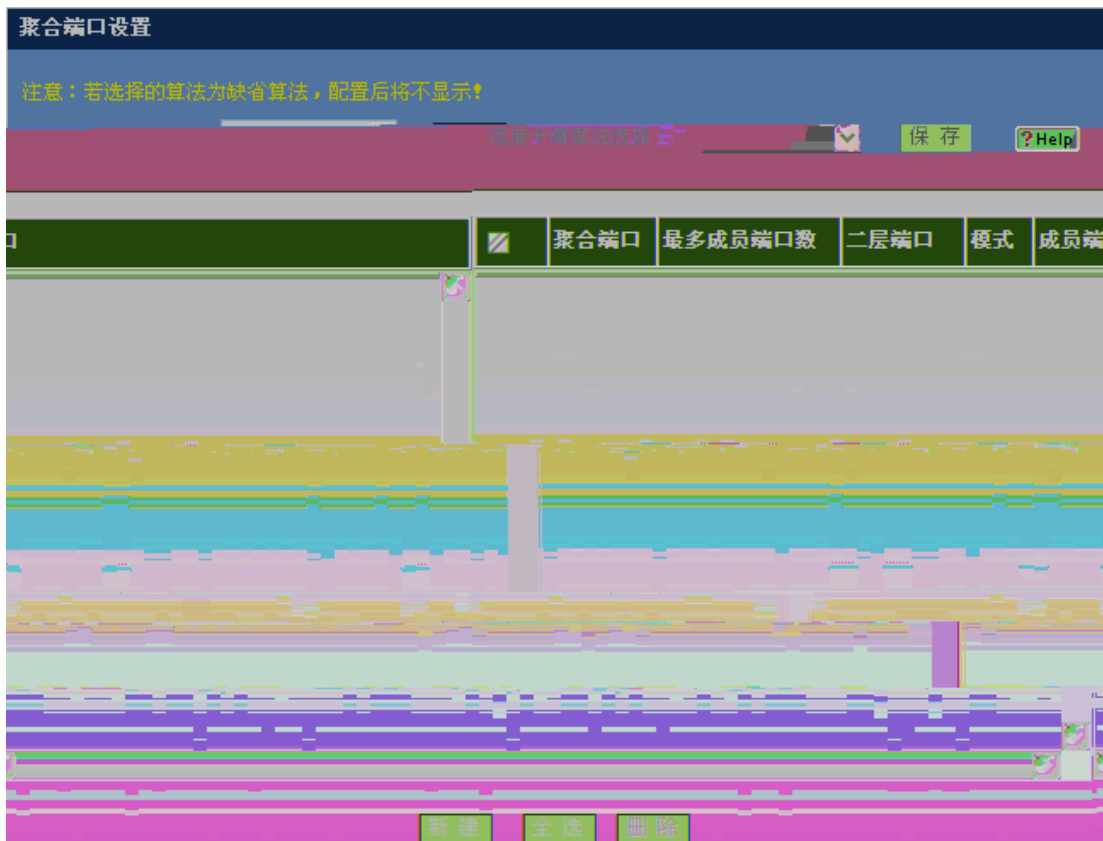


■

“ ”


■

“ ”

1-14

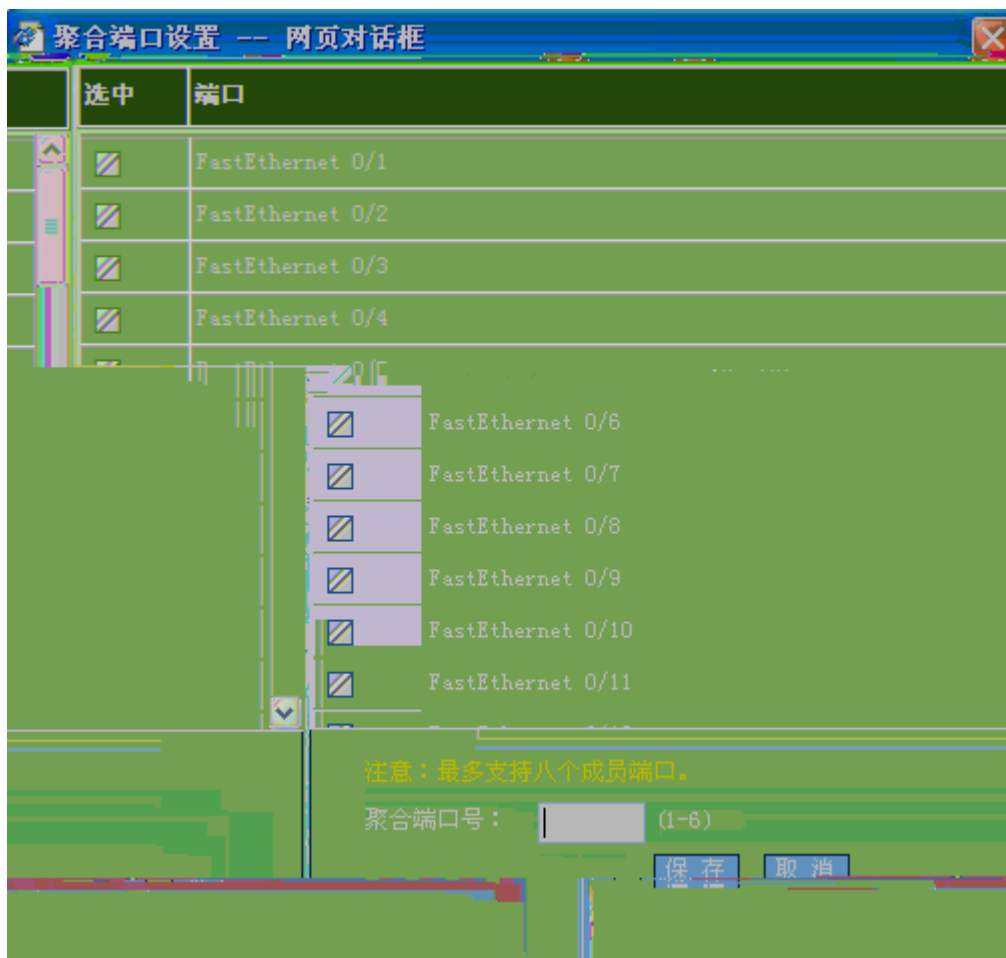

“ ”

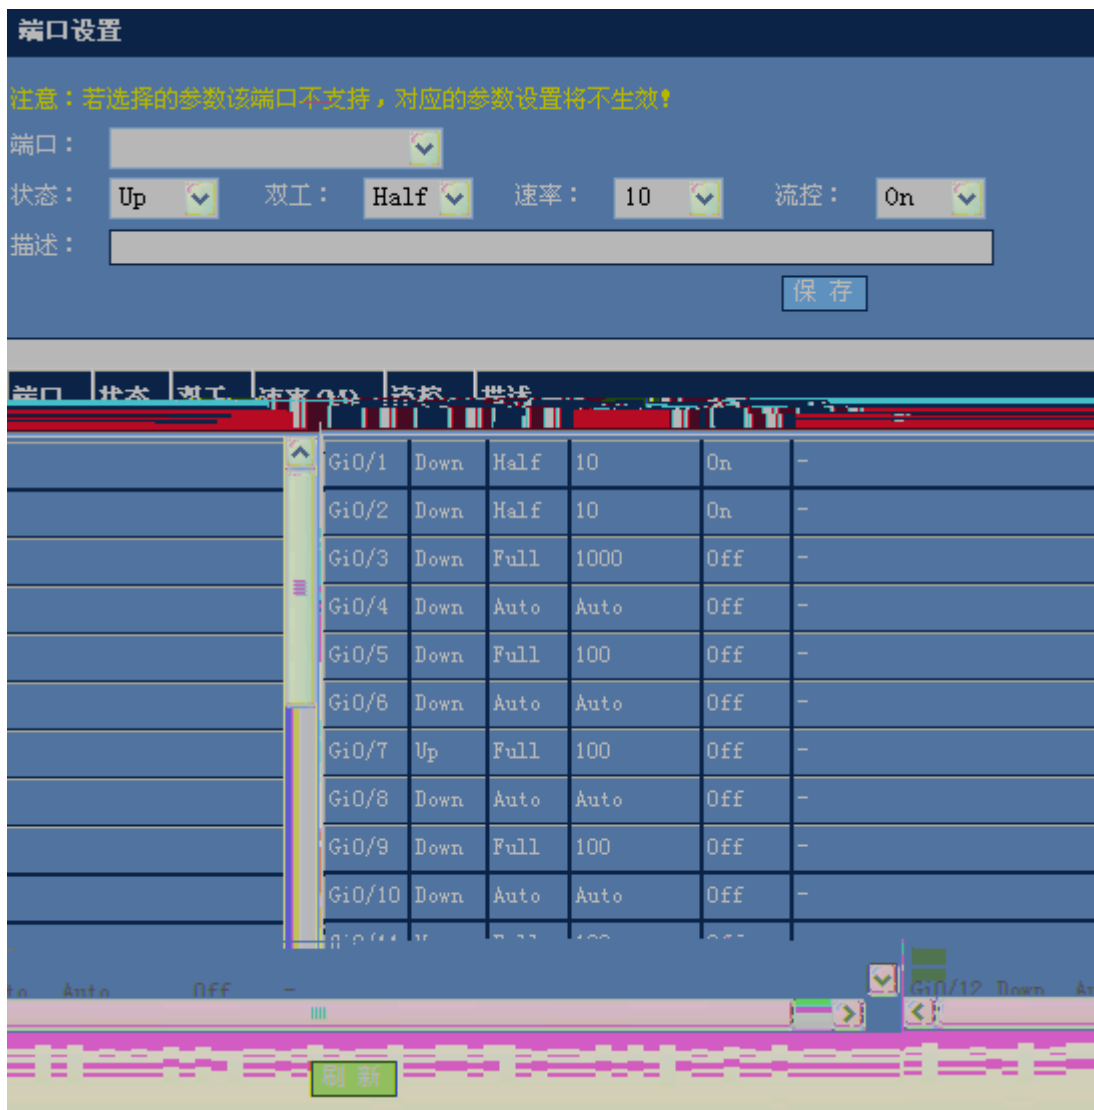

“ ”


## 1.5.8 DHCP

“ DHCP ”

DHCP

1-16 DHCP



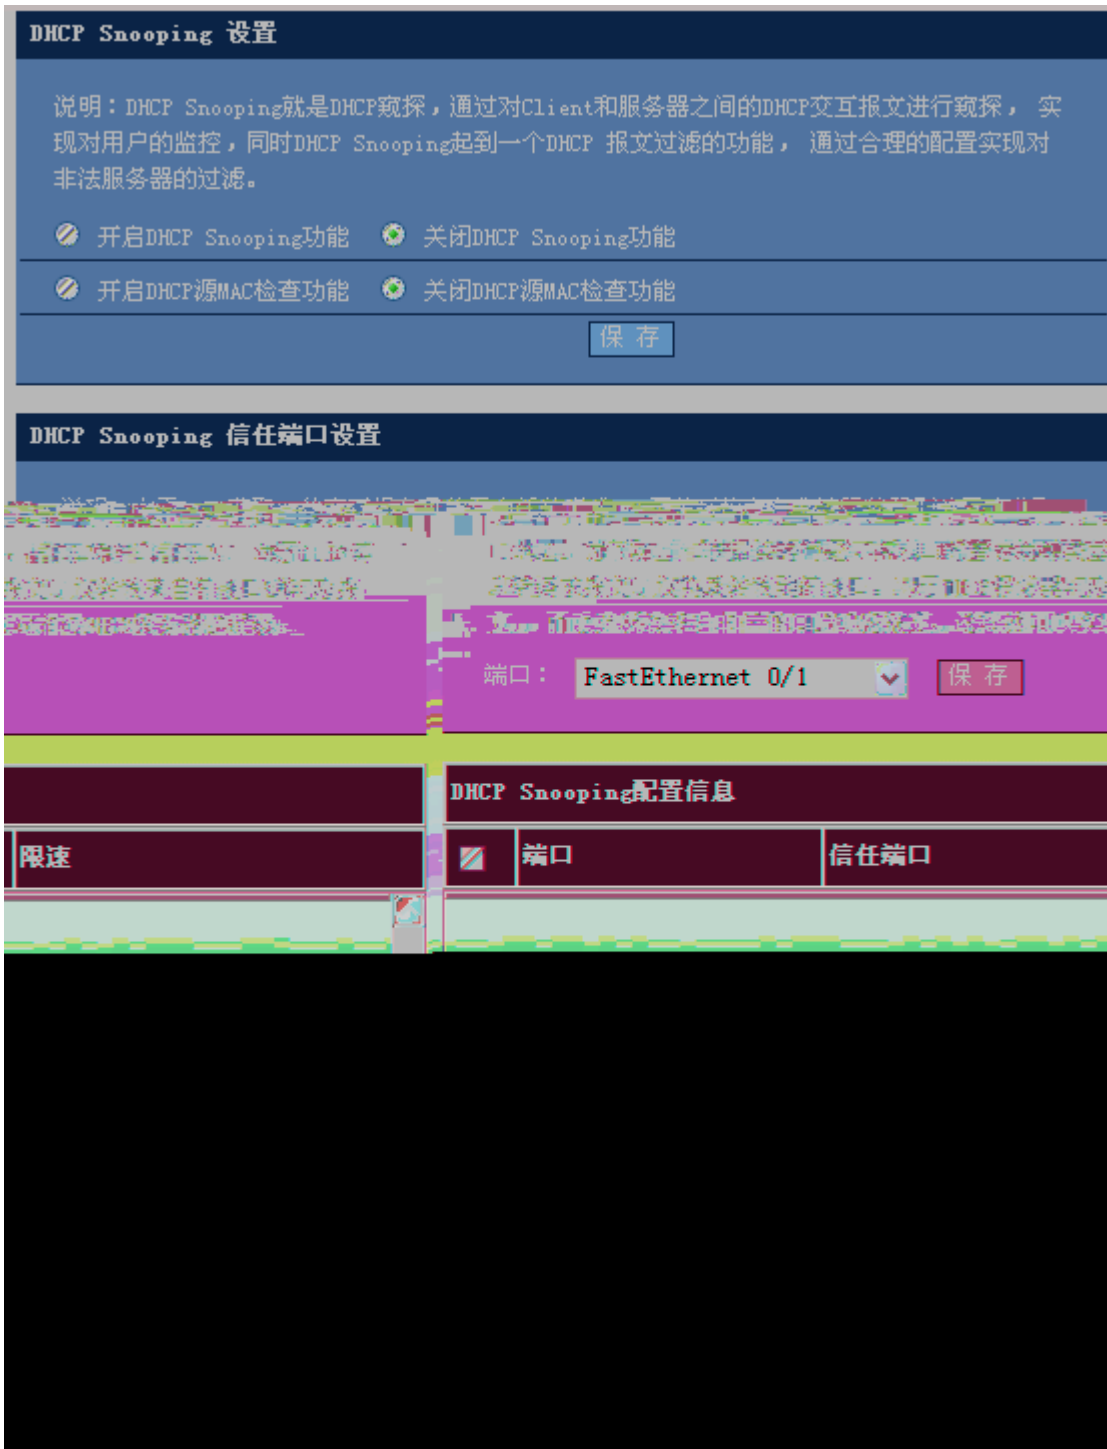

- DHCP Snooping

DHCP Snooping DHCP Snooping MAC “ ”

- DHCP Snooping


“ ” ~ / <

### 1.5.10 IGMP Snooping

“ IGMP Snooping”

IGMP Snooping

1-18 IGMP Snooping

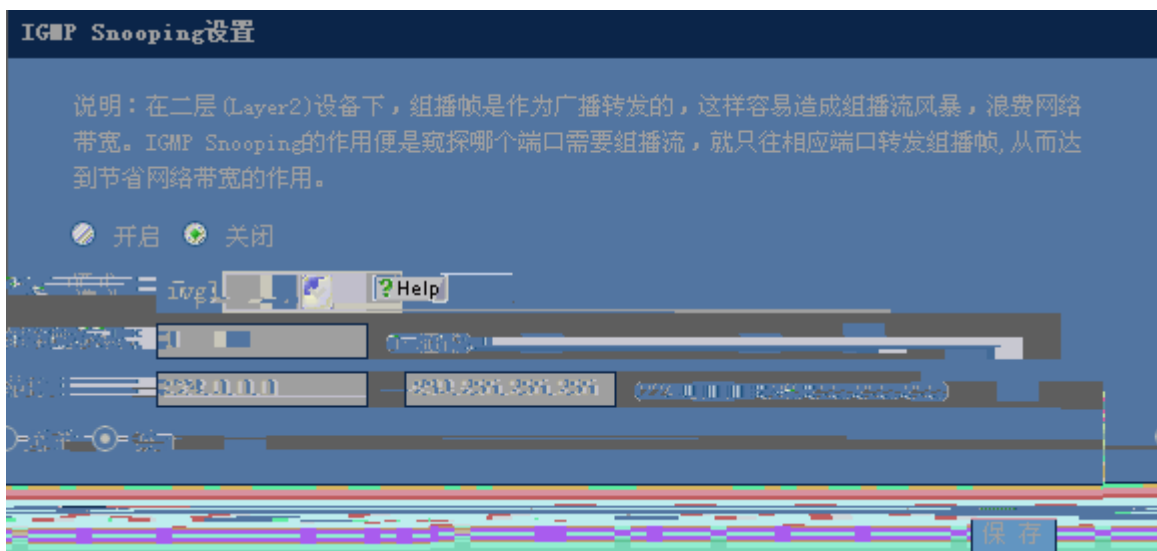


IGMP Snooping “ ” ivgl svgl  
 ivgl-svgl svgl ivgl-svgl IP “ ”  
 IGMP Snooping “ ” “ ”

### 1.5.11 STP

“ STP ” STP

1-19 STP

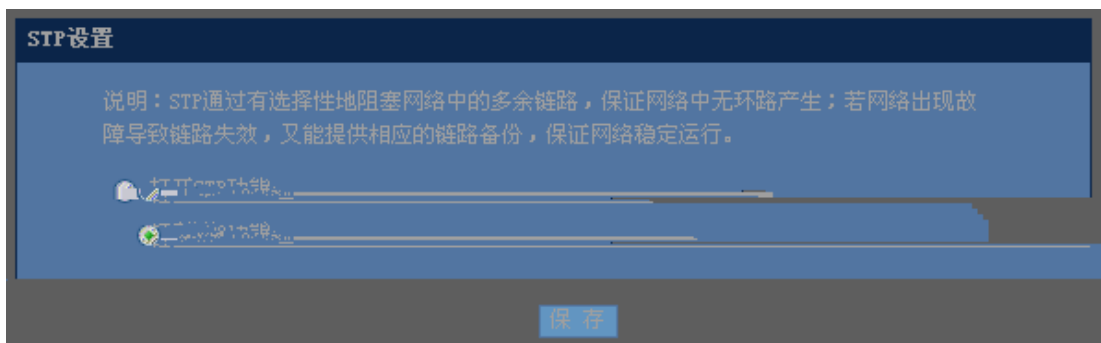


“ STP ” “ STP ” “ ”

## 1.5.12 SNMP

“ SNMP ”

SNMP

1-20 SNMP

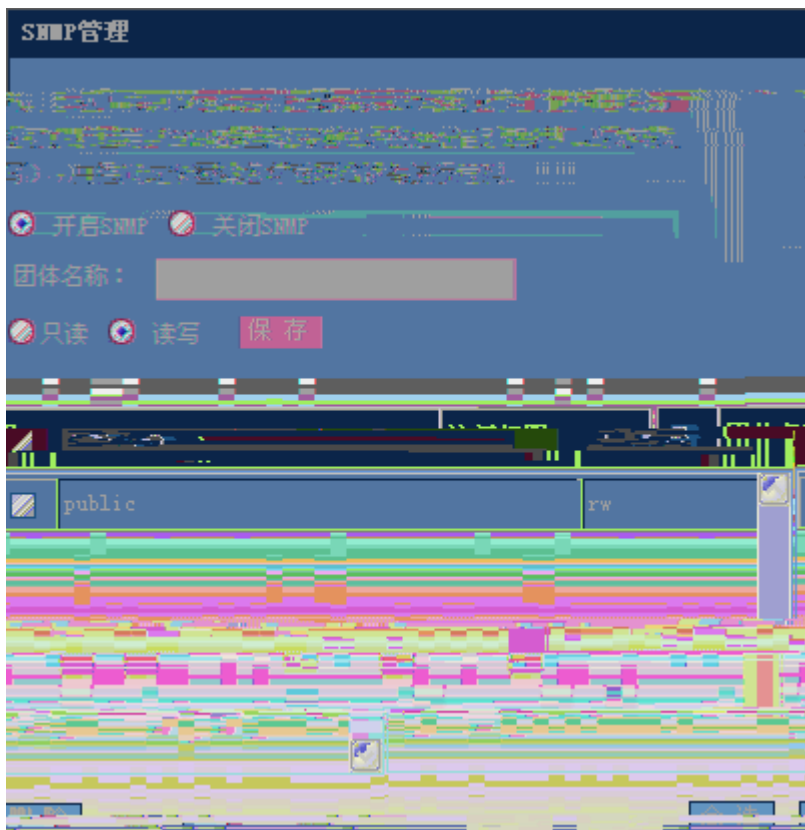

SNMP

“ SNMP”

“

”

SNMP

“

SNMP”

“

”

“

”

## 1.6

### 1.6.1 ARP

“ ARP ”

ARP

1-21 ARP



“ ”  
“ ”

## 1.6.2 ARP

“ ARP ”


ARP

1-22 ARP



“ ”

1-23

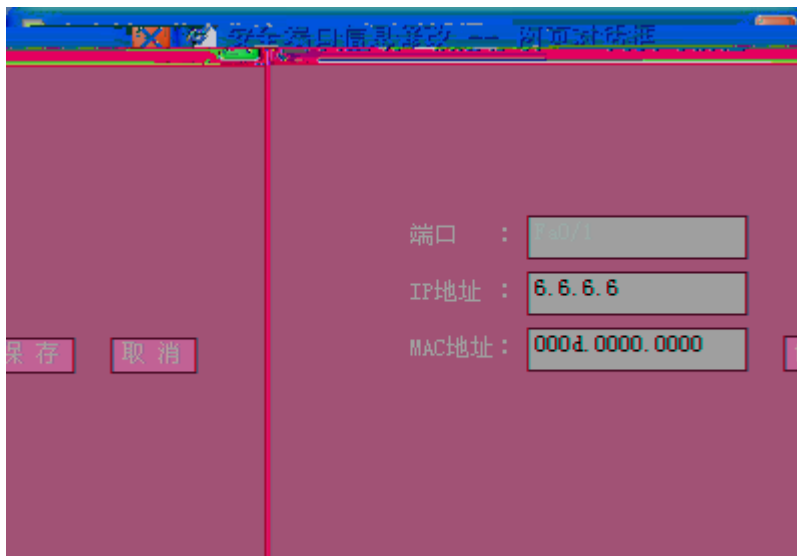

“ ”

### 1.6.3 ARP

“ ARP ”

ARP

1-24 ARP



“ ARP ”

“ ARP ”


### 1.6.4 ACL

“ ACL ”

ACL

1-25 ACL



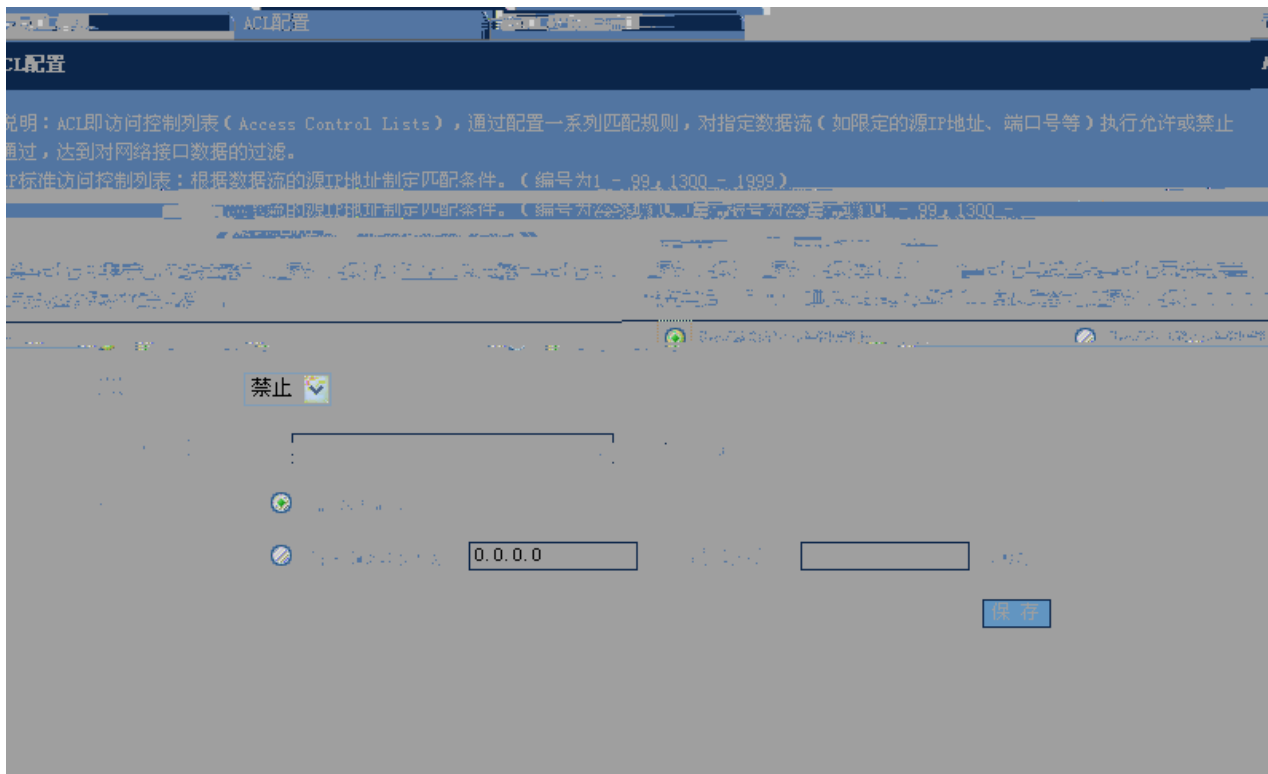


“ ” “ ”

ID

IP IP , IP “ ”

IP “ IP ” IP

1-27 IP

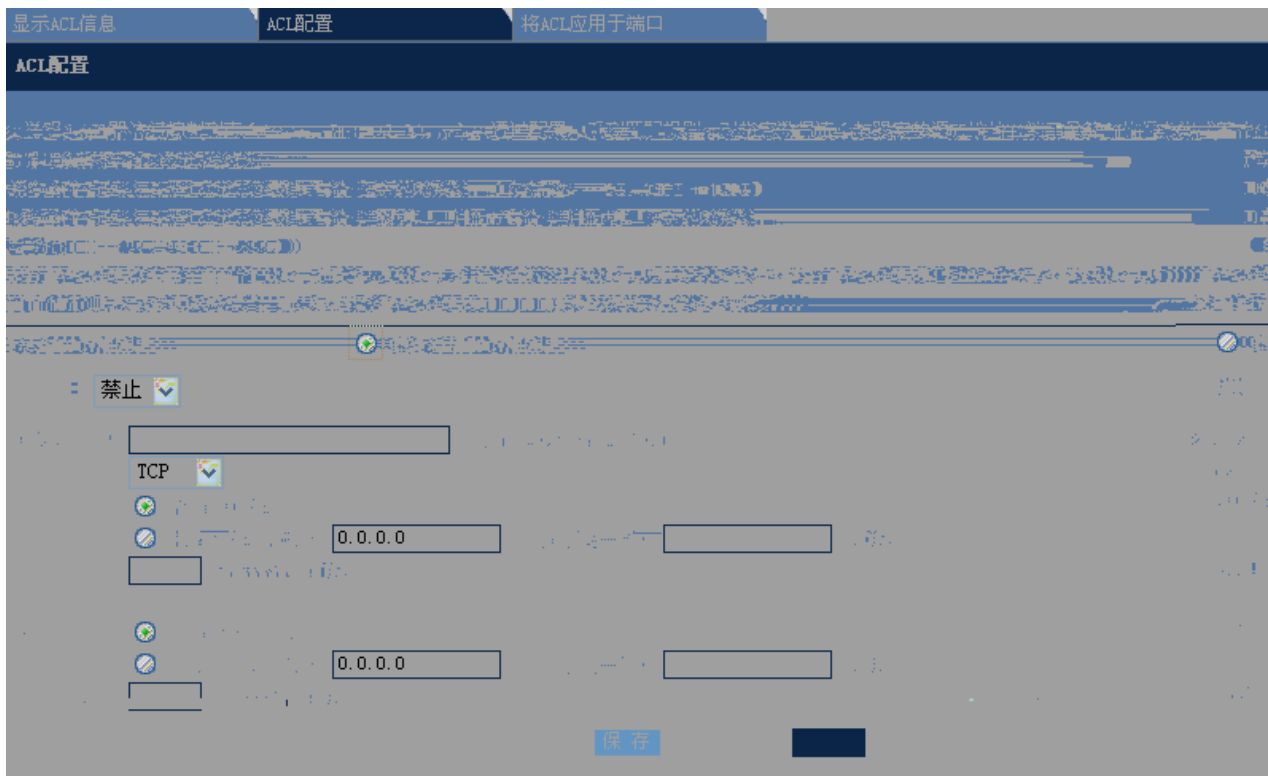

“ ” “ ”

ID

TCP UDP IP ICMP

IP

IP

IP

IP

IP

IP

“ ”

■ ACL

1-28 ACL



ACL

ACL

“ ”

“ ”



PC

ACL

PC

WEB


## 1.7 QOS

### 1.7.1

“ ”

1-29



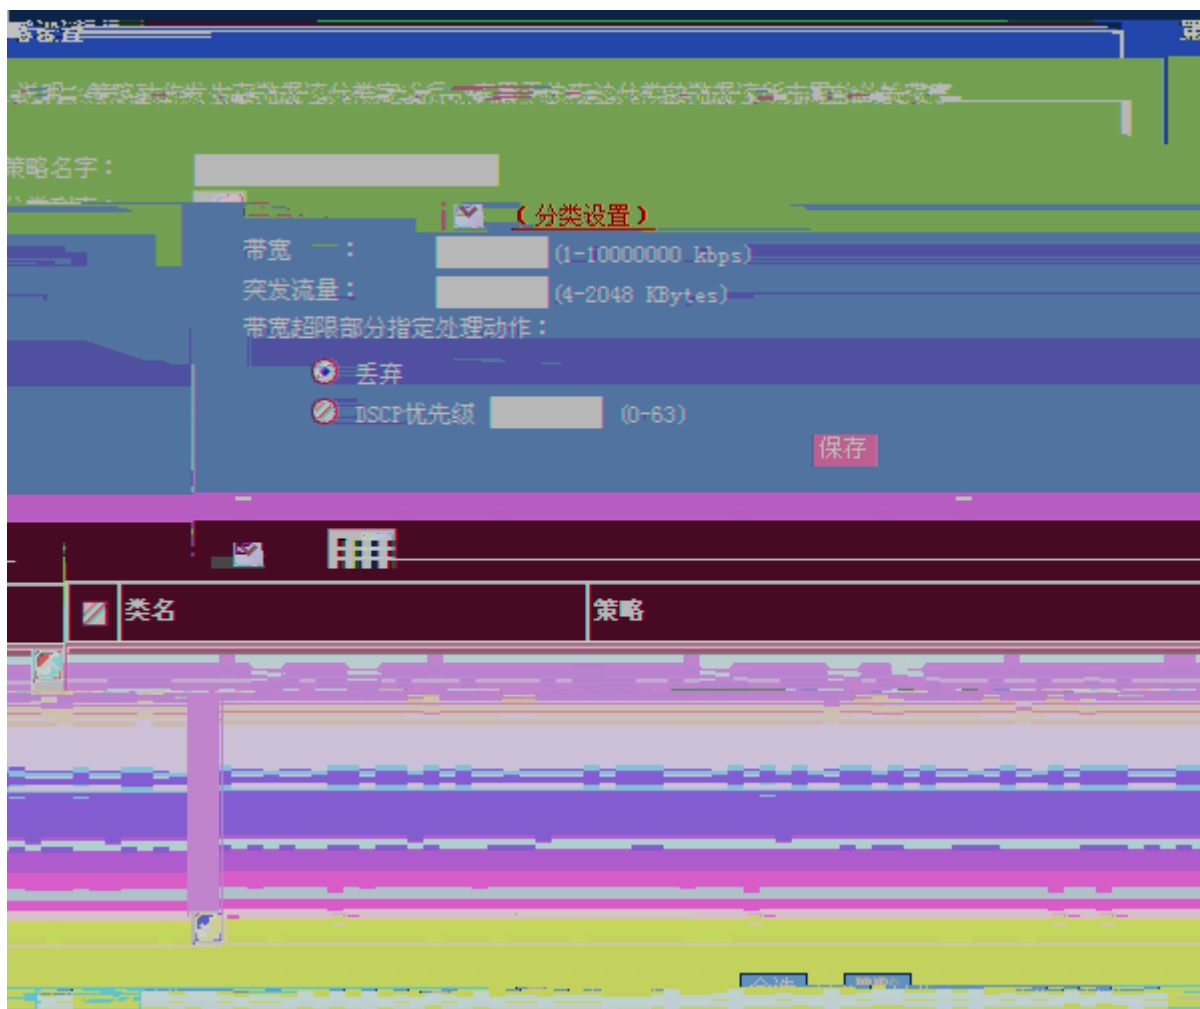

### DSCP

“ ”

“

”

“ ”

### 1.7.3

“ ”

1-31

### 流设置

说明：应用策略设置对端口的输入或输出流进行限制。

端口：

策略列表：

限速方向： 输入限速  输出限速

<input type="checkbox"/>	端口	方向	策略名	信任模式	COS
<input checked="" type="checkbox"/>	FastEthernet 0/1	-	-	-	-
<input checked="" type="checkbox"/>	FastEthernet 0/2	-	-	-	-
<input checked="" type="checkbox"/>	FastEthernet 0/3	-	-	-	-
<input checked="" type="checkbox"/>	FastEthernet 0/4	-	-	-	-
<input checked="" type="checkbox"/>	FastEthernet 0/5	-	-	-	-
<input checked="" type="checkbox"/>	FastEthernet 0/6	-	-	-	-
<input checked="" type="checkbox"/>	FastEthernet 0/7	-	-	-	-
<input checked="" type="checkbox"/>	FastEthernet 0/8	-	-	-	-
<input checked="" type="checkbox"/>	FastEthernet 0/9	-	-	-	-
<input checked="" type="checkbox"/>	FastEthernet 0/10	-	-	-	-
<input checked="" type="checkbox"/>	FastEthernet 0/11	-	-	-	-

“ ”

“ ”

## 1.8

### 1.8.1

“ ”

1-32

系统信息	
设备型号：	S2924G
主机名：	Ruijie
设备状态：	
设备名称：	
设备地址：	

### 1.8.2

“ ”

1-33

```


当前配置
Building configuration...
- Current configuration : 12931 bytes

2008 -
!
version RGNOS 10.2.00(3), Release(30355)(Tue Mar 11 19:23:04
23195A44470348C)
!
!
!
!
vlan 1
 name vlan1
!
vlan 2
!
vlan 3
!
vlan 4
!
vlan 5
!
vlan 6
!
vlan 7
!

```




端口运行状态	
端口	带宽占用
FastEthernet 0/1	0%
FastEthernet 0/2	0%
FastEthernet 0/3	0%
FastEthernet 0/4	0%
FastEthernet 0/5	0%
FastEthernet 0/6	0%
FastEthernet 0/7	0%
FastEthernet 0/8	0%
FastEthernet 0/9	0%
FastEthernet 0/10	0%

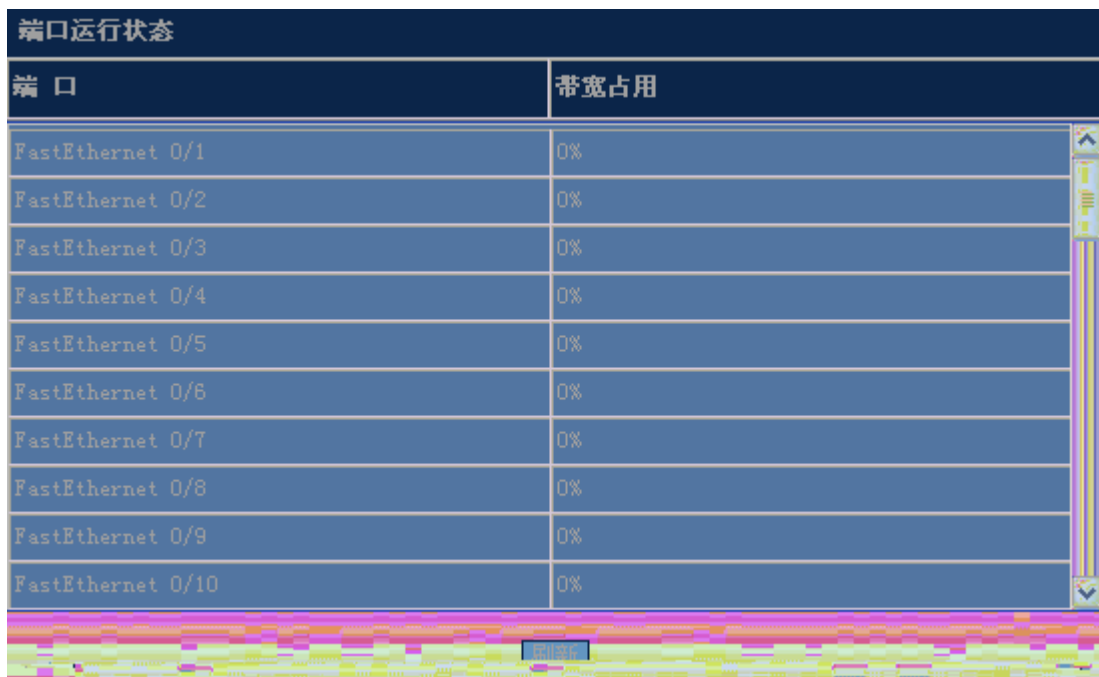

## 1.8.5


“ ”

1-36

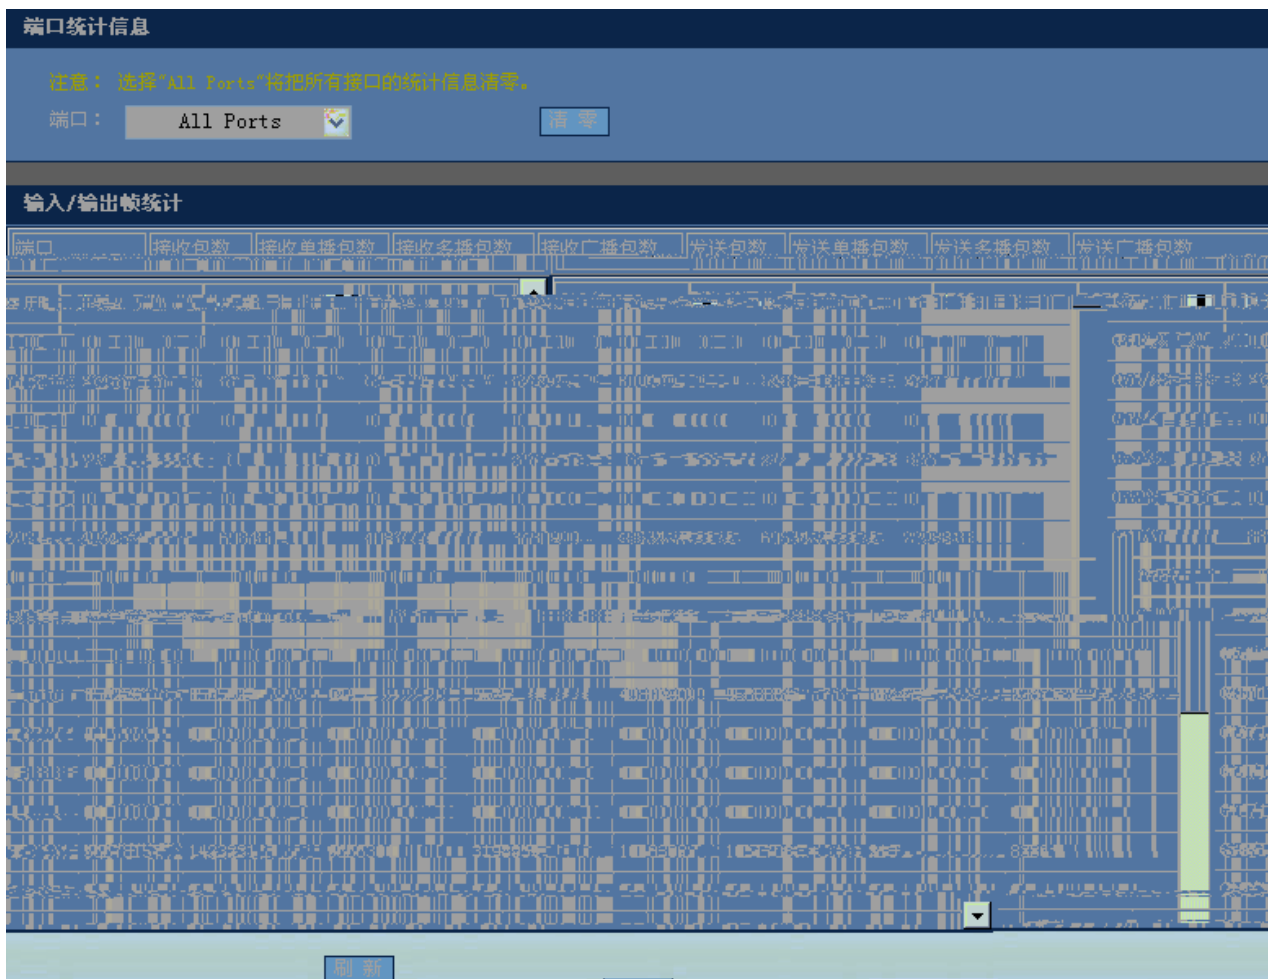

### 1.8.6

“ ”

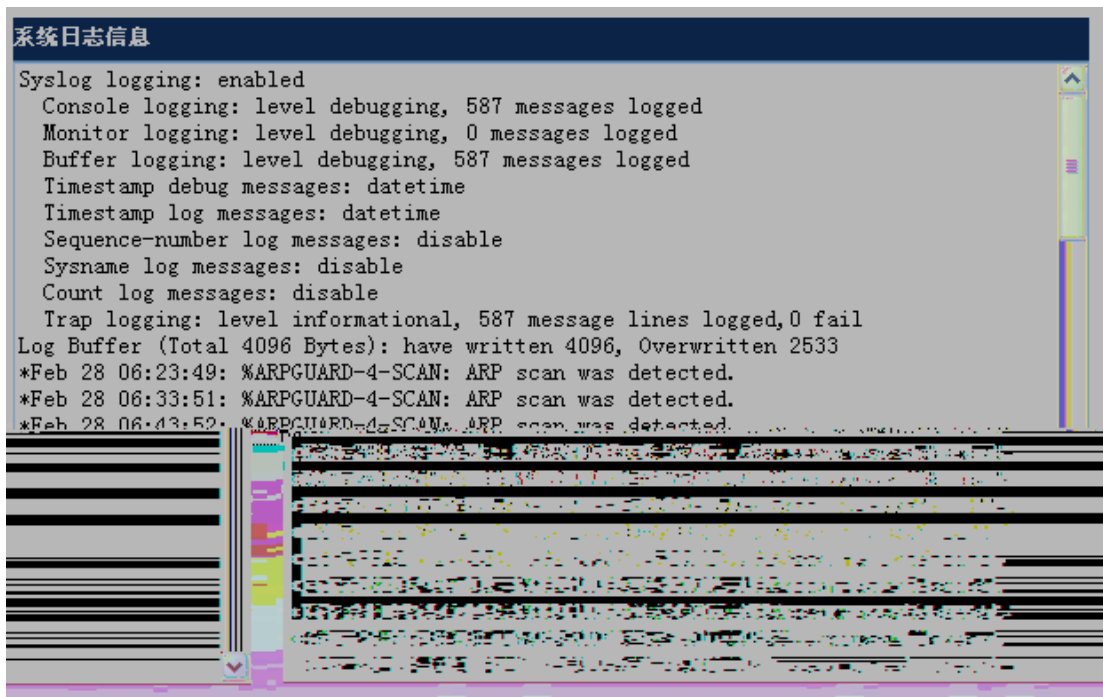


## 1.9

### 1.9.1 Ping

“ Ping”

Ping

1-38 Ping

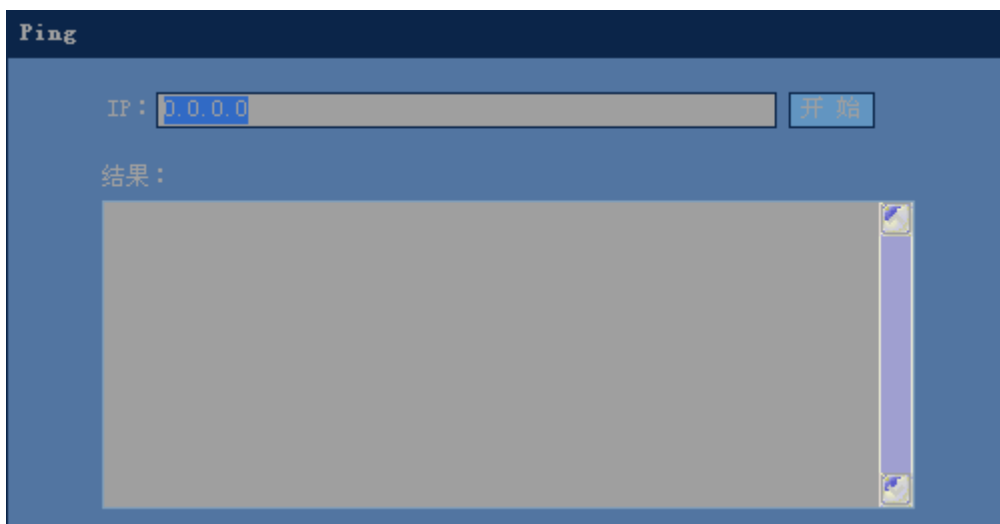


IP “ ” IP Ping

## 1.9.2 Telnet

“ Telnet”

Telnet

1-39 Telnet

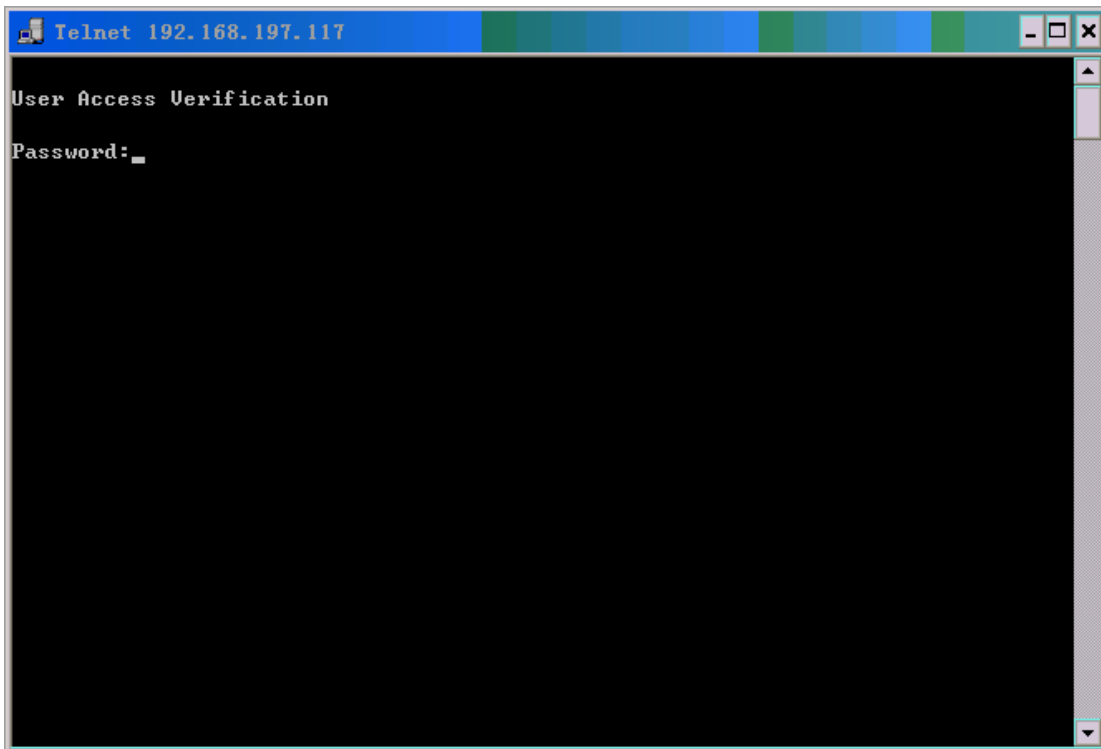

“ Telnet”

Telnet

PC


Telnet

PC Telnet

## 1.9.3

“ ”

1-40

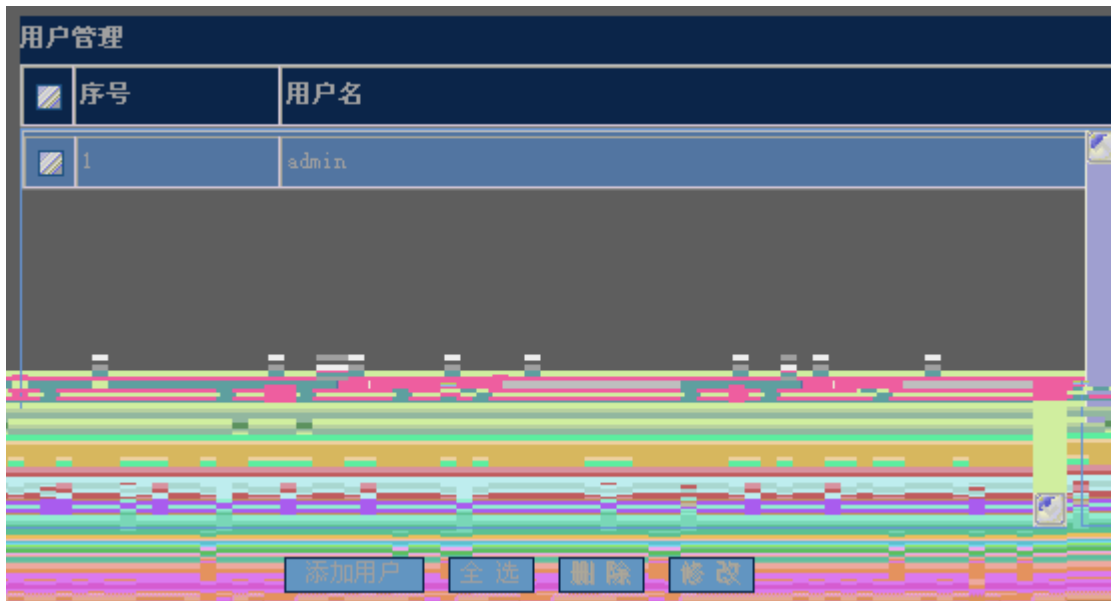

“ ”

#### 1.9.4 修改Telnet登录口令

### 修改Enable口令

注意：如果您设置了新的enable口令，则在设置之后使用新口令重新登录。

新口令：

确认新口令：

保存

### 修改Telnet登录口令

新口令：


确认新口令：

保存

- Enable

Enable “ ”

1-44

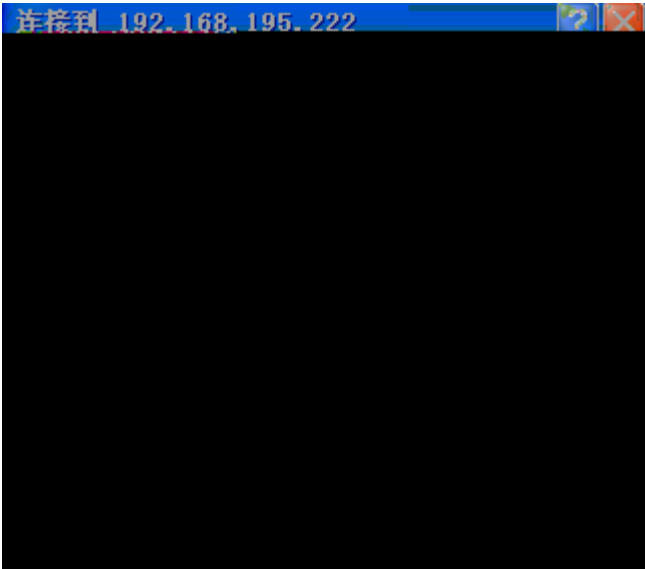

- Telnet

Telnet “ ”

### 1.9.5 /

“ / ”

/

1-45 /



config.text

TFTP

IP TFTP


“ ”

### 1.9.6 WEB

“ WEB ”

WEB

1-46 WEB

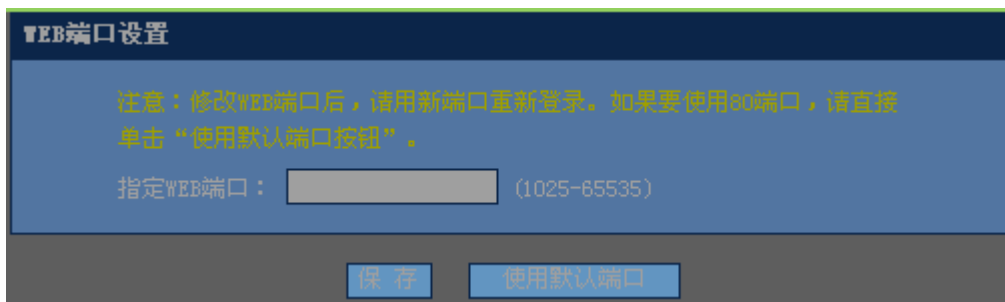

“ ”

8080


IP 192.168.1.1 http://192.168.1.1:8080  
http://192.168.1.1

“ ”

### 1.9.7

“ ”

1-47

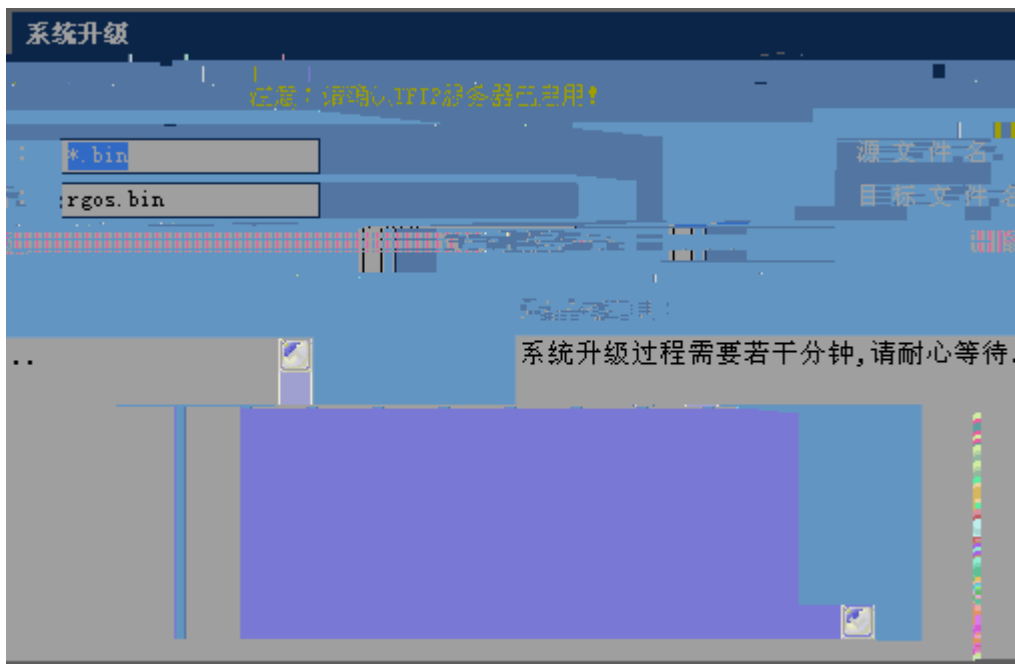

TFTP TFTP  
TFTP IP “ ”

### 1.9.8

“ ”

“ ”

### 1.10 WEB

WEB WEB enable



## ■ Local

```
Ruijie(config)#show running-config
Building configuration...
Current configuration: 2014 bytes
!
version RGS 10.2(4), Release(55435) (Wed May 13 11:50:07 CST 2009 - ngcf32)
vlan 1
username admin password admin //WEB
username admin privilege 15 //WEB 15
no service password-encryption
ip http authentication local //WEB local
!
enable service web-server // WEB
!
!
interface VLAN 1
ip address 192.168.100.1 255.255.255.0 // IP
!
!
line con 0
line vty 0 4
login
!
!
```

