

RG-IS2700G x æ V @ & ² C | À _



RG-IS2700G x æ V @ & ² C | O ”



ù ¢ Contents



RG-IS2700G x æ V X P - @ & ²

; T f é] , % é µ ¢4ì , ³4ì x é
Ã F x g • ° Ð Ð §5;) ° Ê é „ Ð { -ož

Ø,Ó - ñ 0 , @ ù) L , ³ û . . , V 3 , @ ù 6

Ž ũ Ã F g @ & ³ Ö 36G,
12 , .

高性能


主要

高可用性

-40~85°C
IP40

>=6KV


CPU • õ ê ±0 • NFPP • x T Y
ß0 • f ACL x0 • T ARP
°0 • T DOS Y ß W

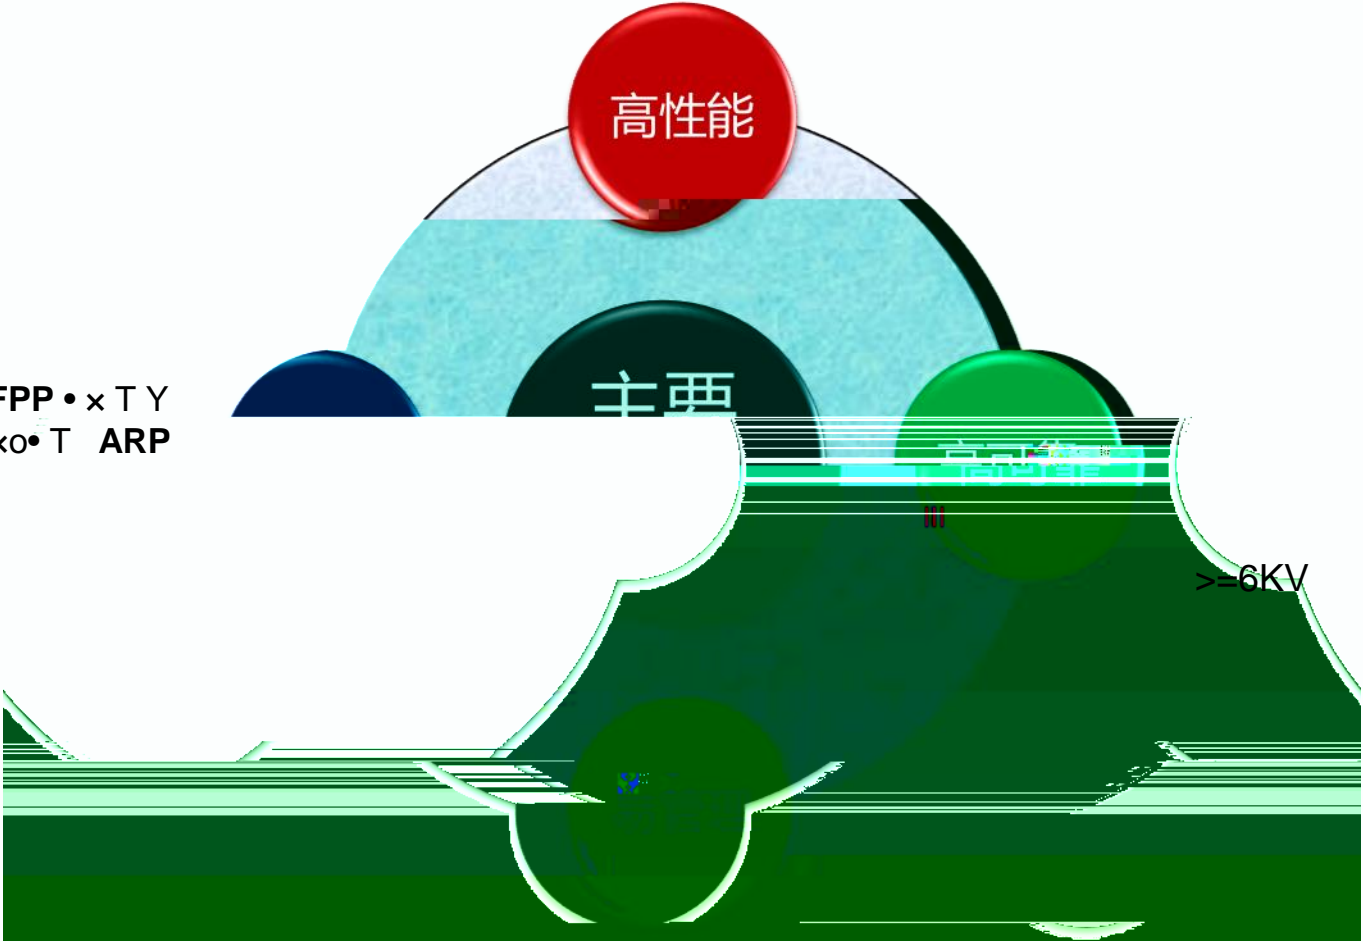

Smartweb a Âo • V % • ? n x
ERPS ° - È ~ • õ ,20ms f ã & .

ù ¢ Contents



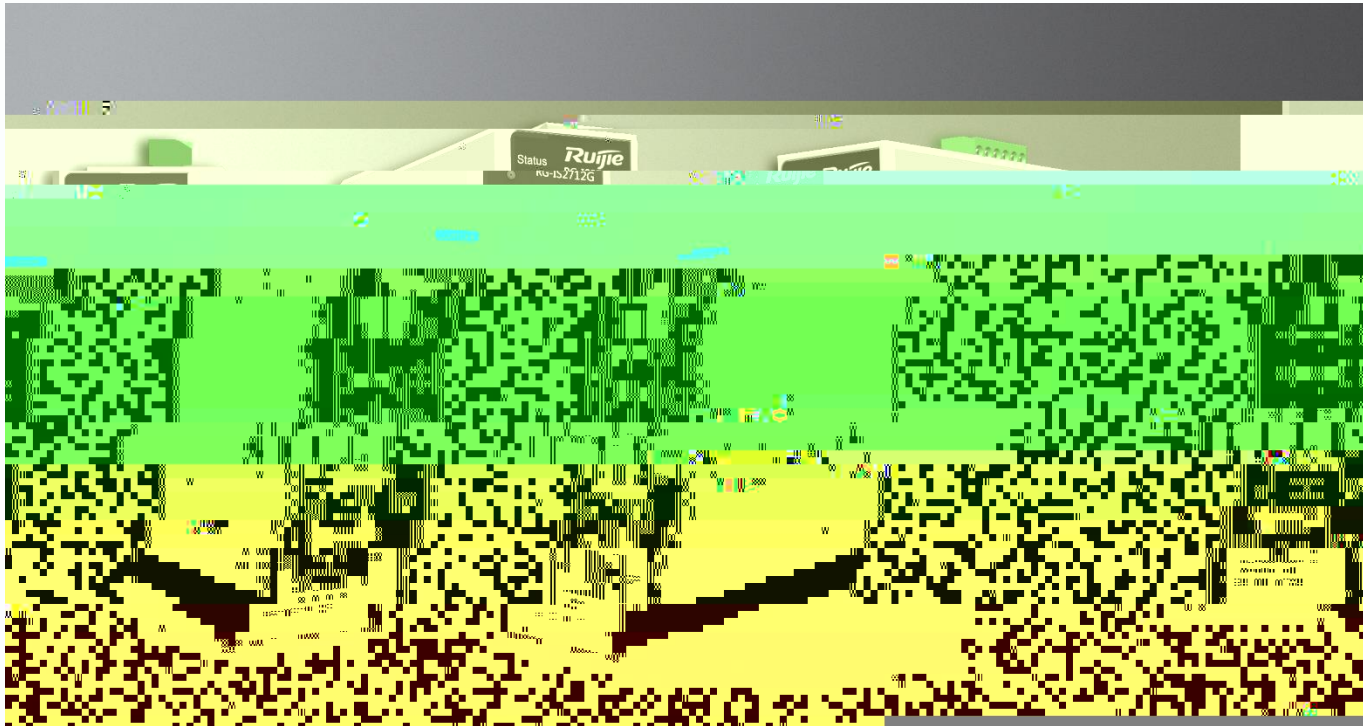

RG-IS2712G 8


4 SFP



RG-IS2706G 4

2 SFP

— IS2712G

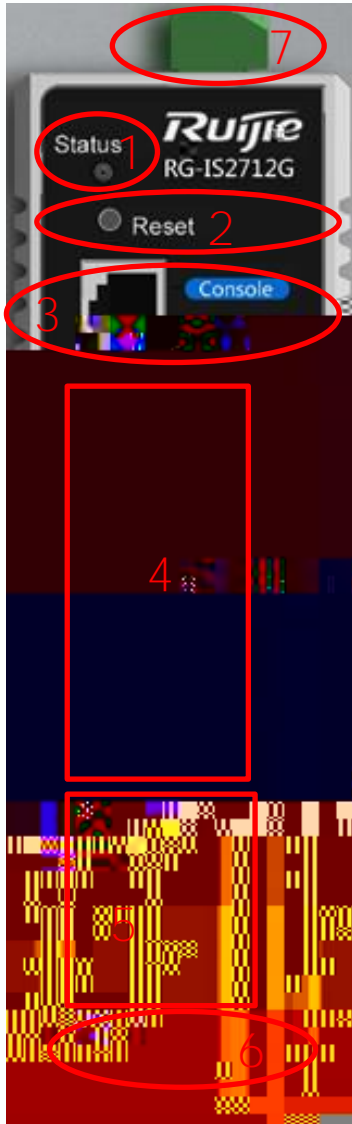

Reset


Console

8 10/100/1000Base-T

4 1000Base-X SFP /2.5G

1000Base-X SFP

— IS2706G

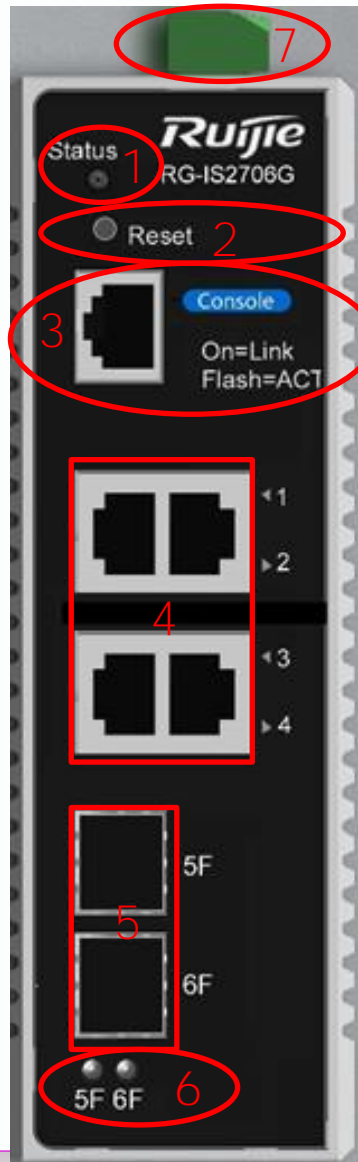

Reset


Console

4 10/100/1000Base-T

2 1000Base-X SFP /2.5G


1000Base-X SFP


— IS2712G&IS2706G

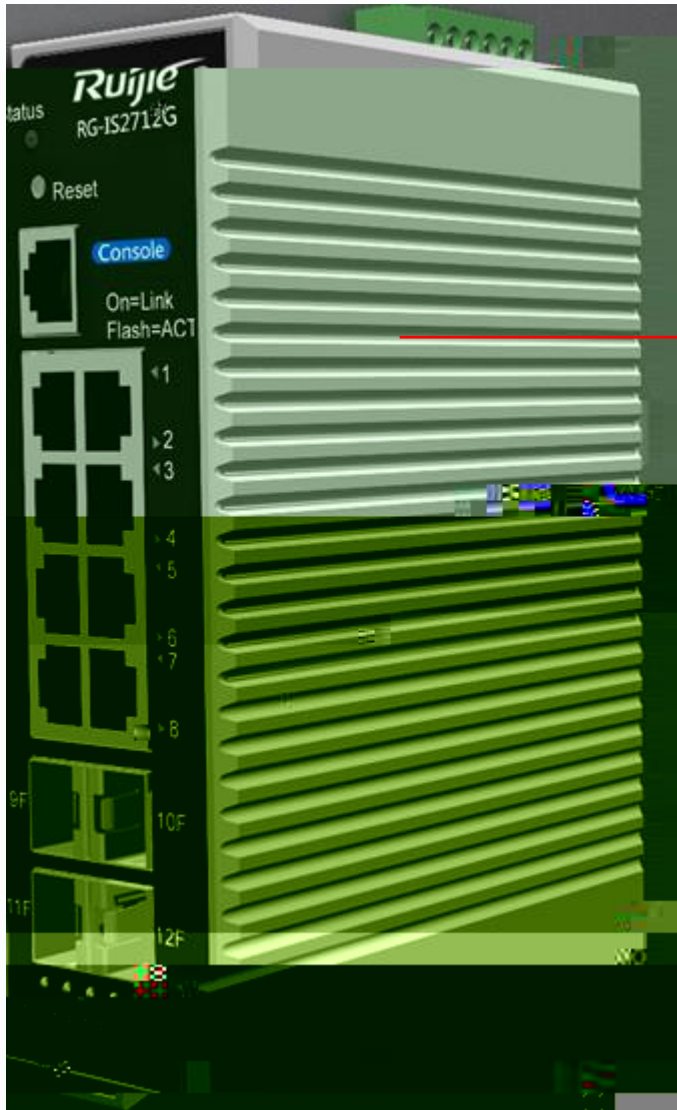

RG-IS2700G

10cm

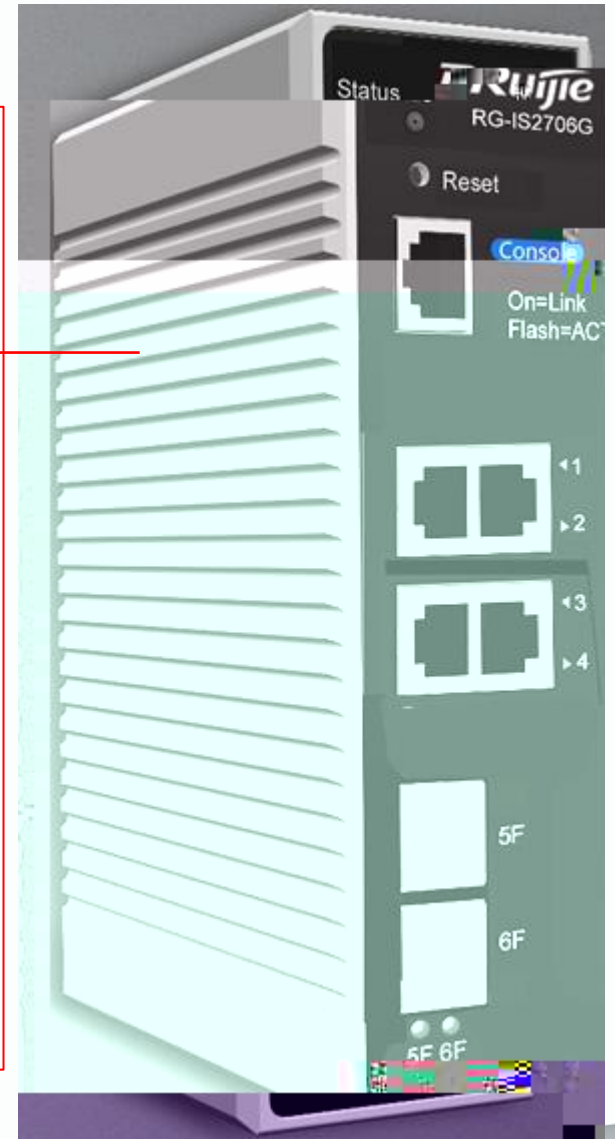

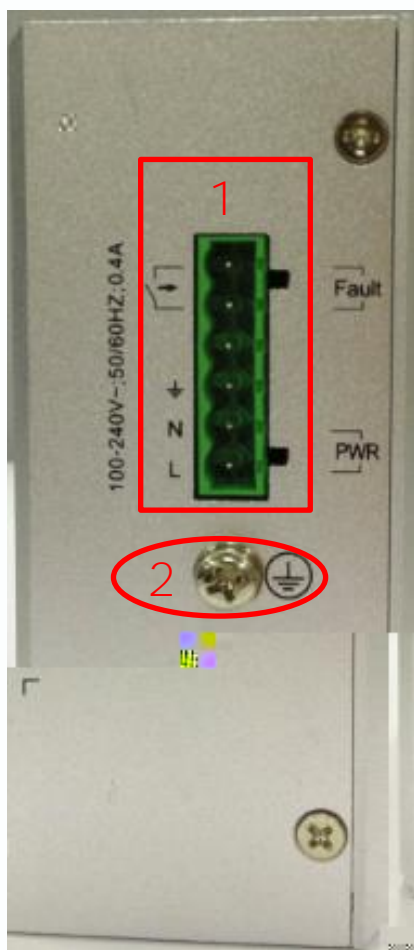

电源接口接线说明



L: 火线

N: 零线



100-240V AC



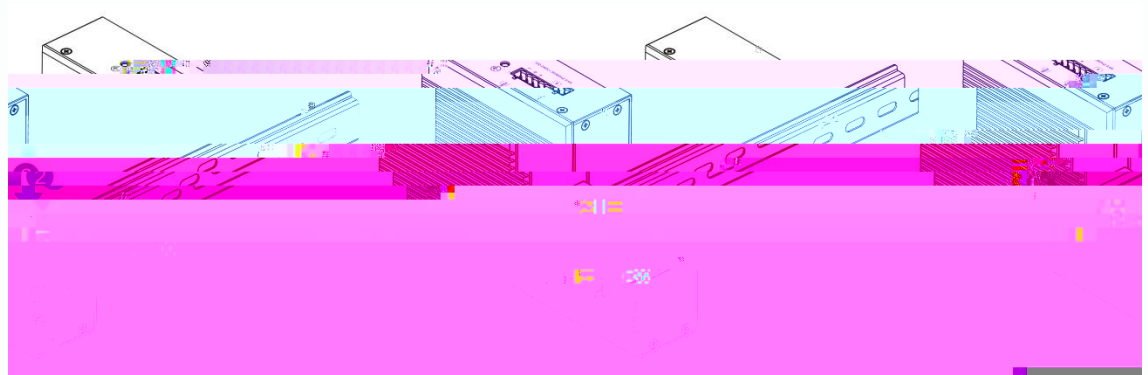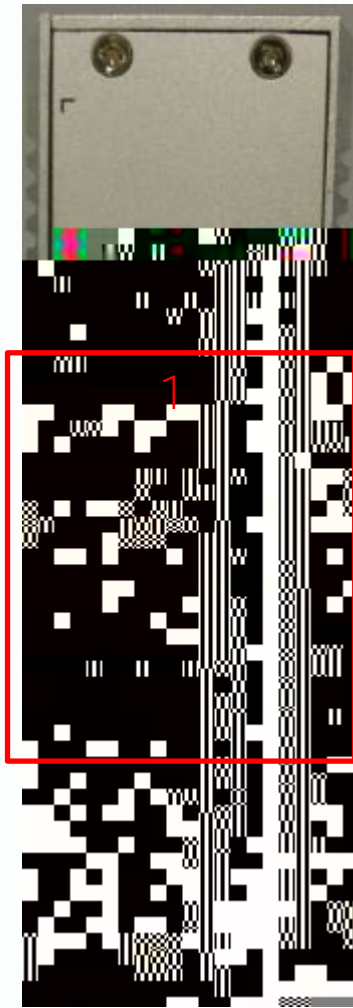


ù ¢ Contents





-30

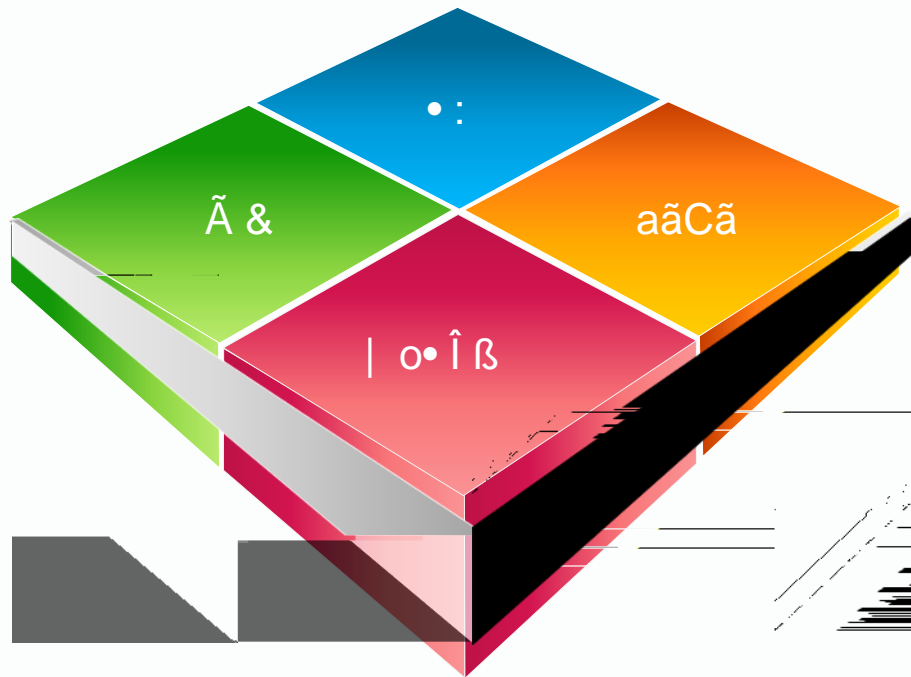



1

2

3

4

-20 60 -40 75

5

1588V2

6

(CE\FCC\UL)

IEC61850 EN50155

7




• x @ ù a ‘ { -



3 û . . a ‘ { - u

ERPS

JC

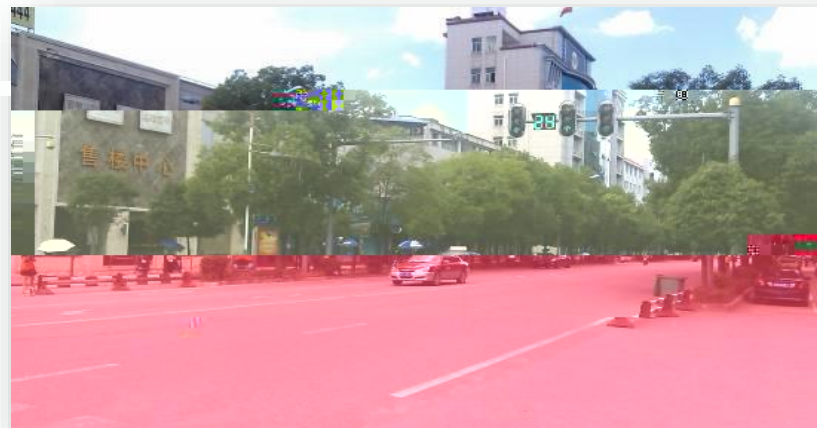

t ¼` u

IT

JC



t Ù ñ 0 / ' /



R ð ñ 0 / ' /



ï C ñ 0 / ' /



P ' L ñ 0 / ' /



€ Ð a ‘

AP

n Ð x

VLAN

IP

q å ¢C⁻ u

1. S5750-24SFP/8GT-S
- 2.



€ D a ‘


AP

n D x
ERPS

ù ¢ Contents



VS



“ www.ruijie.com.cn ”

“ www.ruijie.com.cn/service.aspx ”

“ support.ruijie.com.cn ”

“ webchat.ruijie.com.cn ”

“ 4008-111-000 ”