







**RUNTO**

www.runto.com



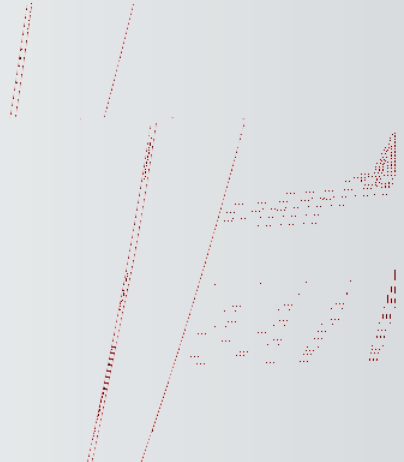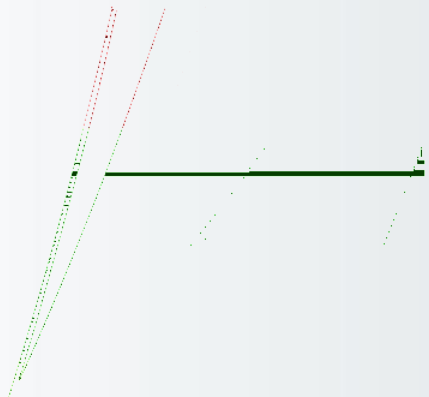


1

RUNTO

www.runto.com

36G,

8

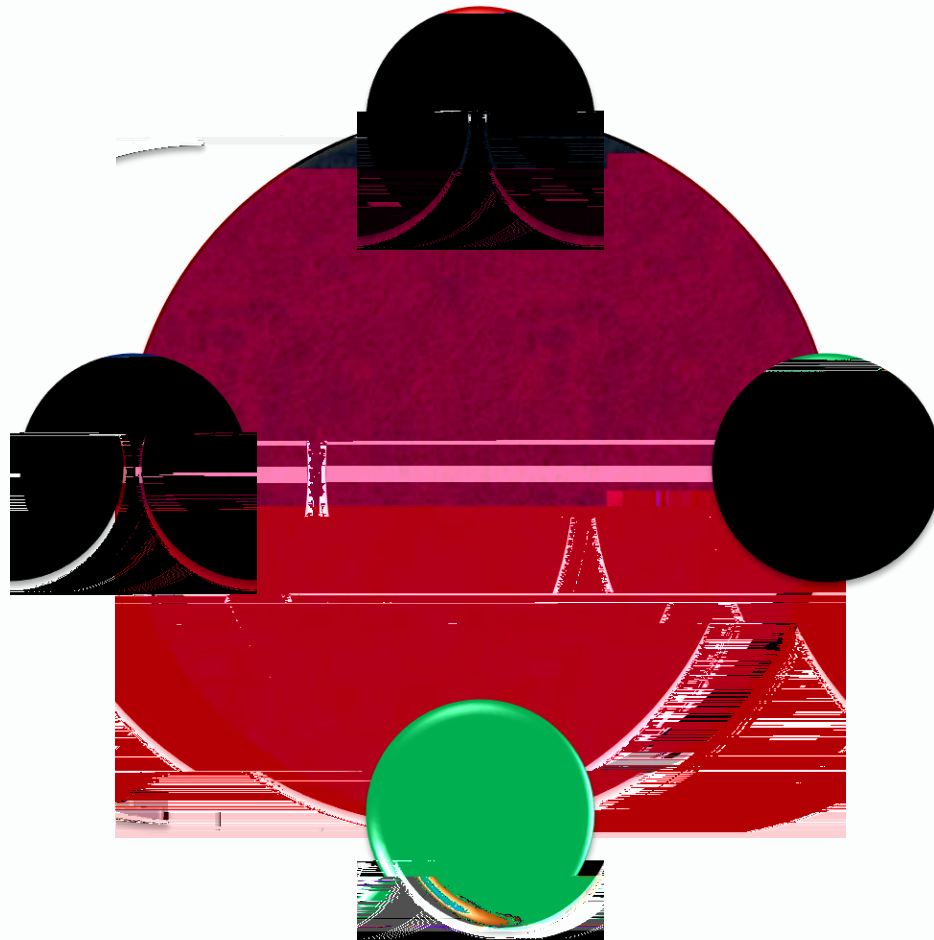

CPU

NFPP

ACL

ARP




DOS

-40~70°C  
IP67

$\geq 6KV$

Smartweb  
ERPS


,20ms

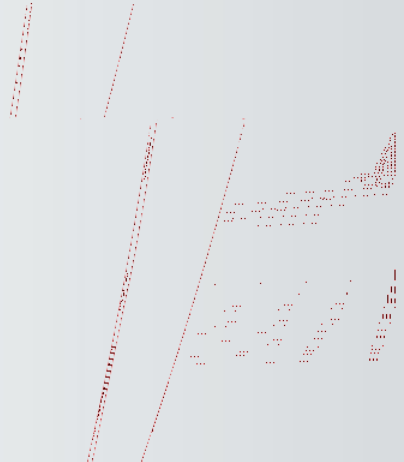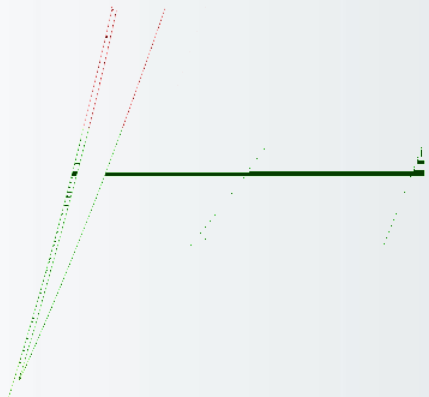



8  
4 POE+


5-8  
POE+  
90W

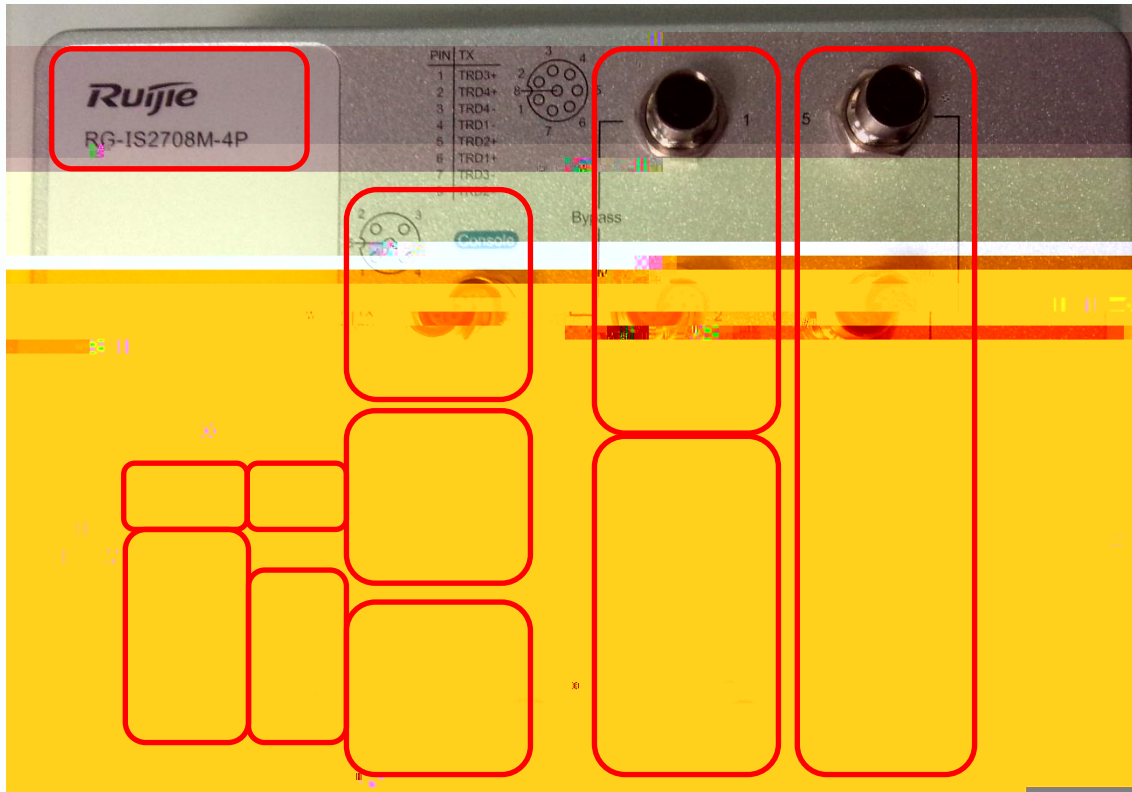

PIN	TX
1	TRD3+
2	TRD4+
3	TRD4-
4	TRD1-
5	TRD2+
6	TRD1+
7	TRD3-

- 1. LOG
- 2.
- 3.
- 4. link
- 5. POE
- 6.
- 7. Relay
- 8. Console
- 9.
- 10.
- 11.



Bypass  
POE+

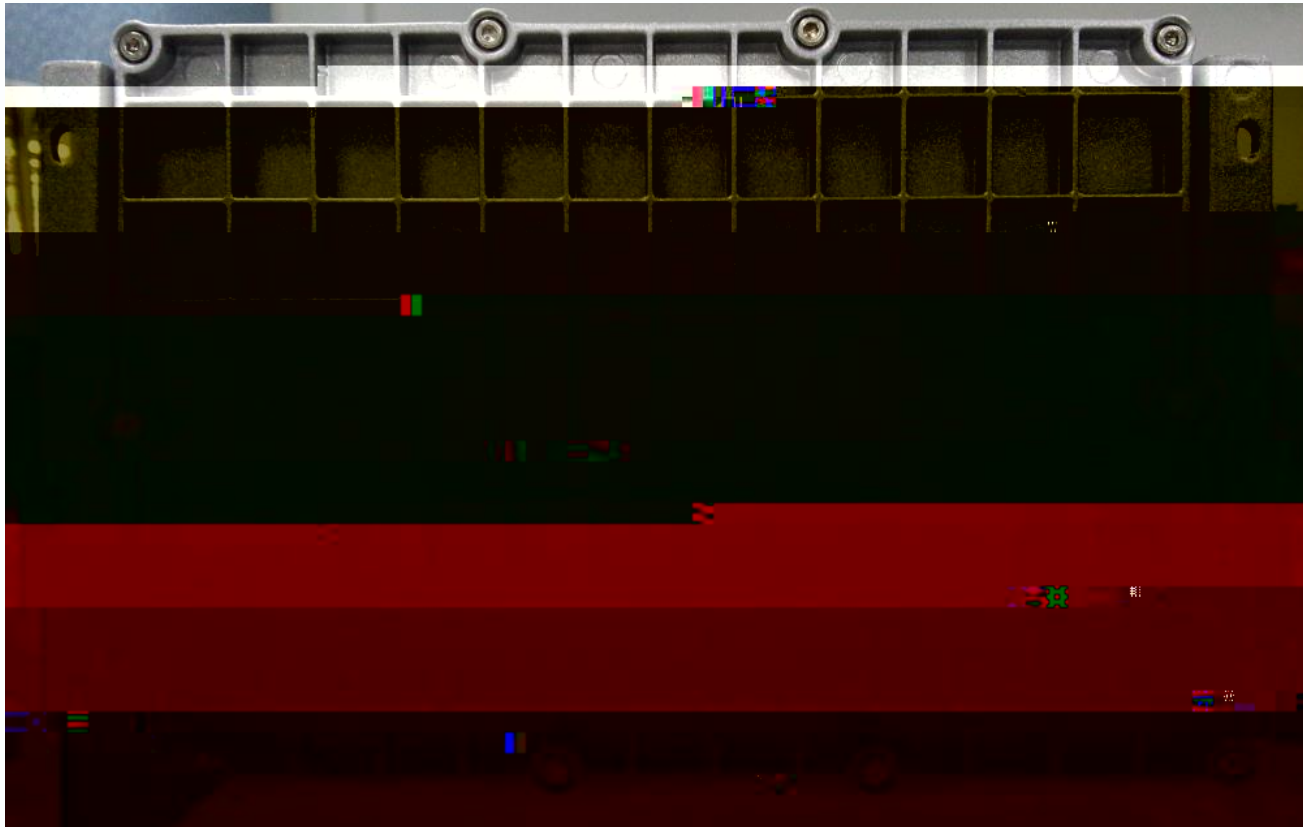


**Rutto**

INDUSTRIE MECCANICHE RUTTO S.p.A.



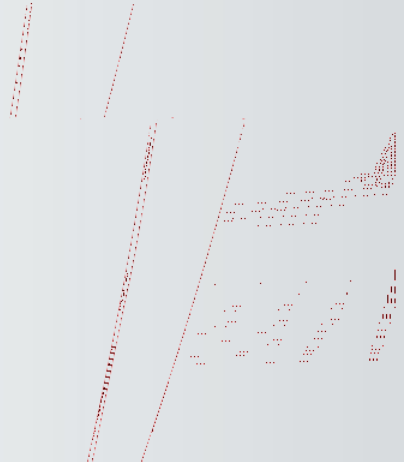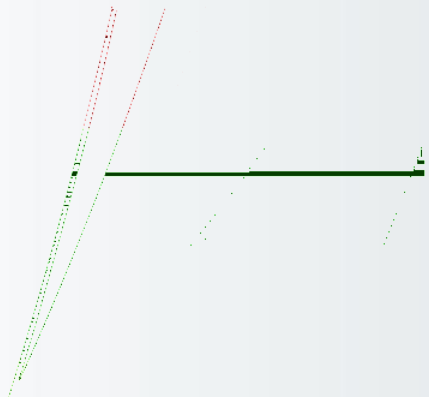

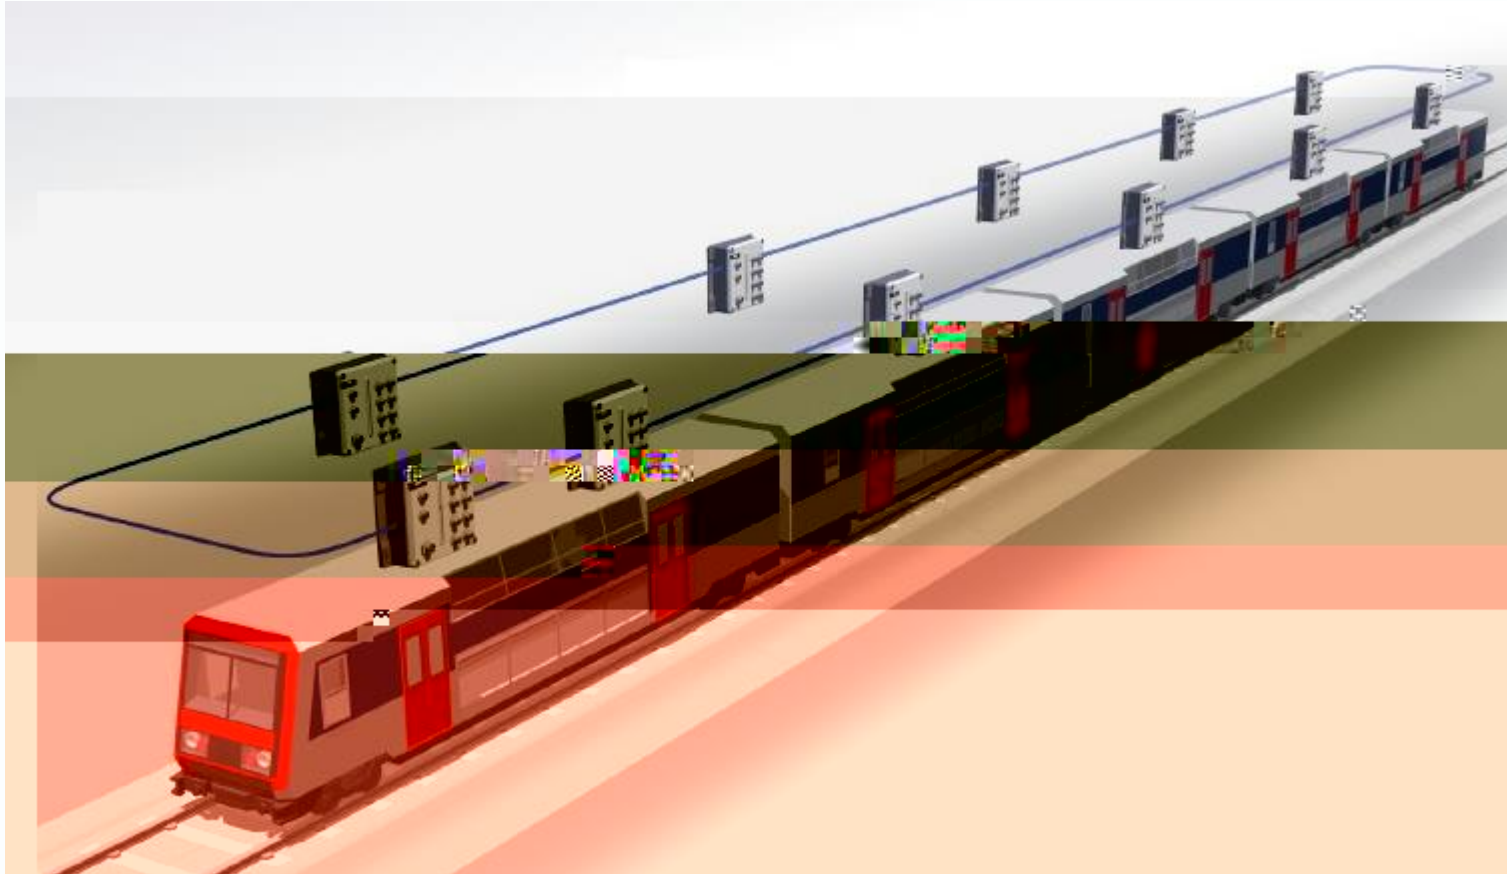


RuTto



1

RUNTO

www.runto.com

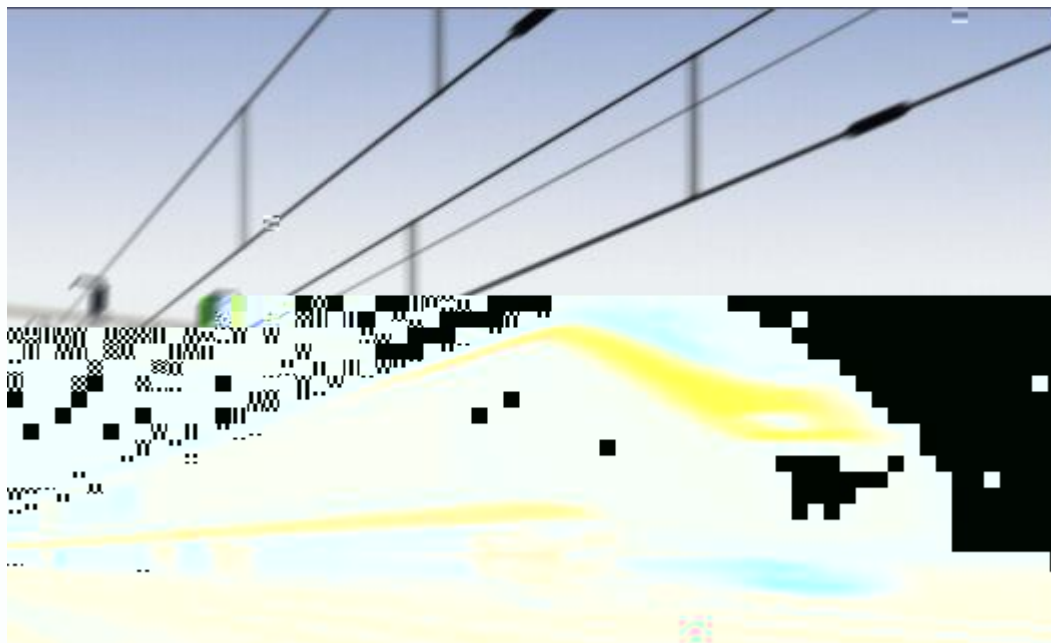

;



M12

1

Ruutu

RUUTUUN KÄYTTÖKÄSIKIRJA



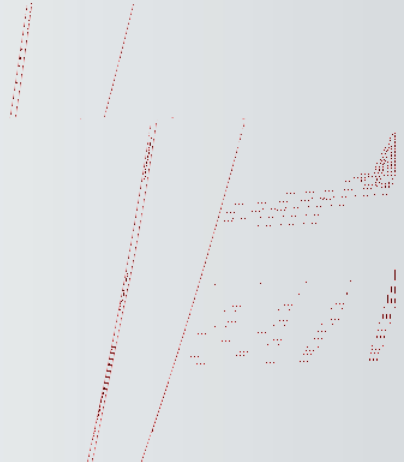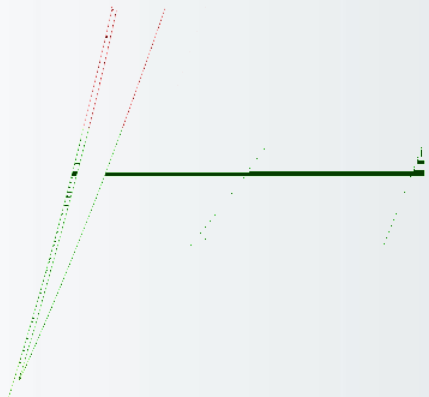

1

RUNTO

www.runto.com

