
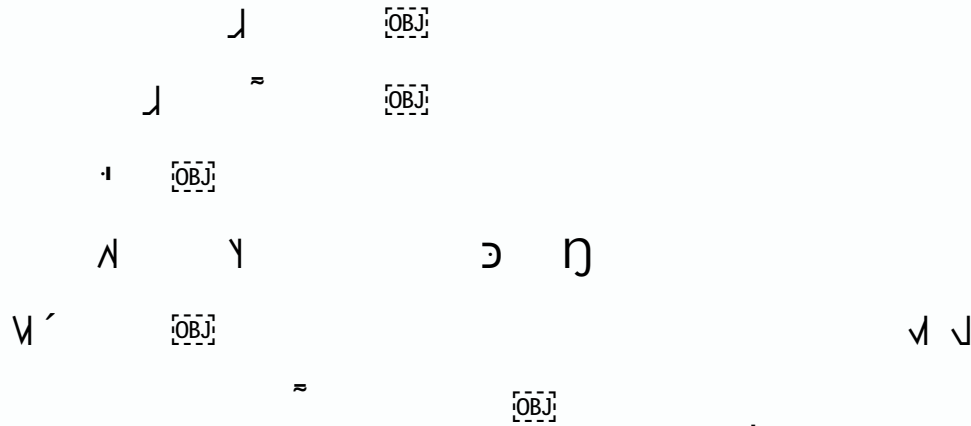


RG-RSR20-X&10-X

			α
2016-08	V1.0	α	
2016-10	V1.1	HSIC α [OBJ]	

Contents

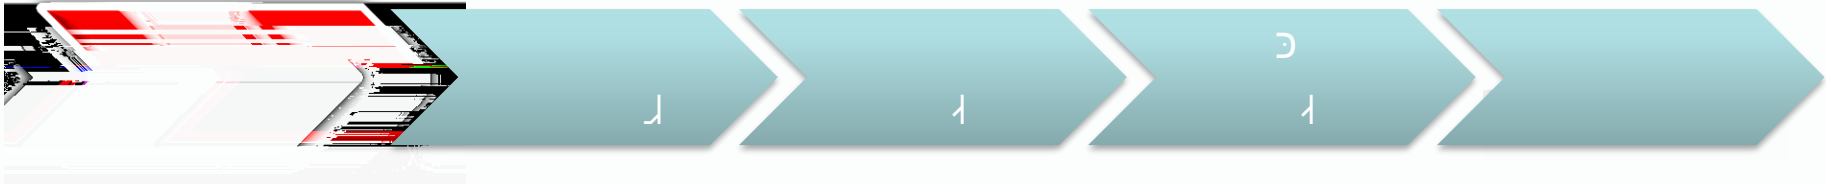

0 ~45


-40~70

10%~95%RH, J


5%~95%RH, J

I

.

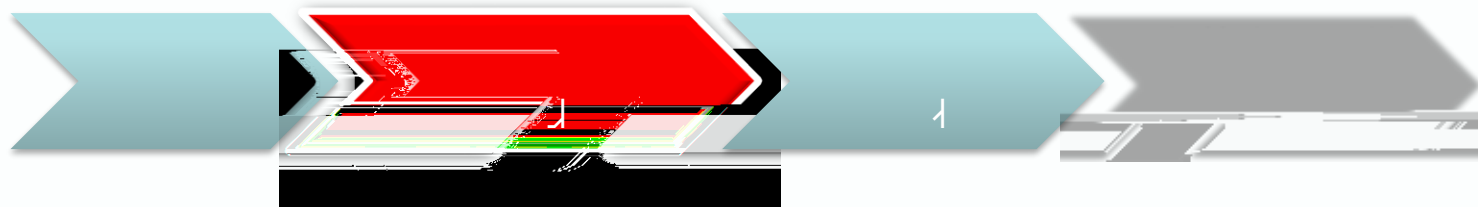

I .

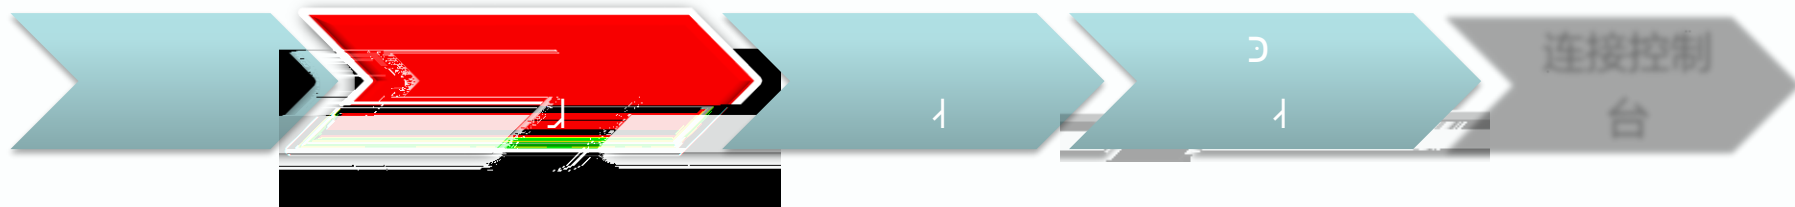

- [OBJ] ↑ ↓ 195 ↓ ↓ ↓
1. [OBJ] ↓ ~
2. ↑ [OBJ] ↓ ↓ [OBJ] ↓ 10cm[OBJ] ↓
3. ↓ ↓



HSIC-2E1/CE1	1 HSIC(0.5U)	RSR20-X-28:slot2~5		(OFL)
HSIC-2HS	1 HSIC(0.5U)	RSR20-X-28:slot2~5		(OFL)
HSIC-4G-LTE	1 HSIC(0.5U)	RSR20-X-28:slot2~5		
RG-PA60	1 DHSIC(01U)	RSR20		





HSIC


1	▼	▲	↑	↓	↓	↑	↓	↓
				↓	↓		↓	↓
	[OBJ]	↓	▲	▲		↑	7	↓

2	RSR20-X-28 slot2~slot5	HSIC ↓	slot 5	slot6	DSIC ↓	↓
	RSR10-X-07 slot2 slot3	HSIC/DHSIC ↓	slot3		↓	



HSIC

HSIC 1

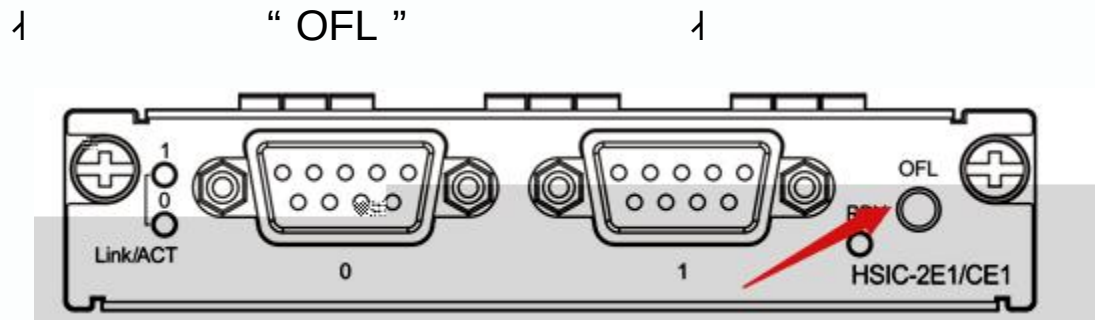

“ OFL ” ~



I .



HSIC

4

HSIC 1

3 1 [OBJ]
3 1

“ OFL ” 3s

4 1 RDY

3
1

1

4 1 [OBJ] RDY

1 [OBJ] 1


[OBJ] SYS ~ 1 [OBJ]

I .



HSIC


1 3 1 ' 1
7 1 7 1

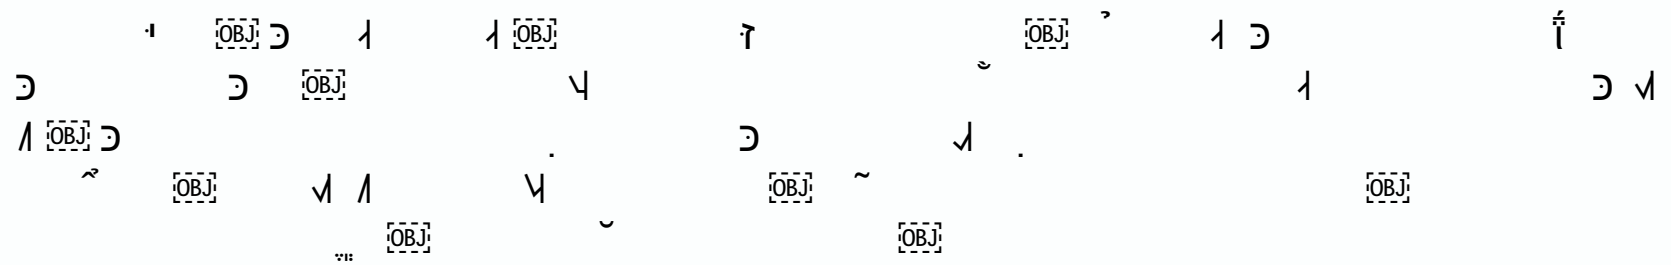AC: 100~240V 50-60Hz . 

I .




(RG-PA60)
 [OBJ] α

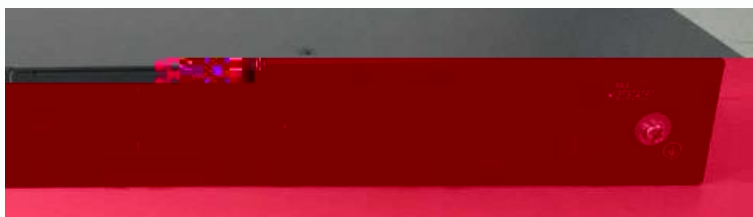

([OBJ]),



1.

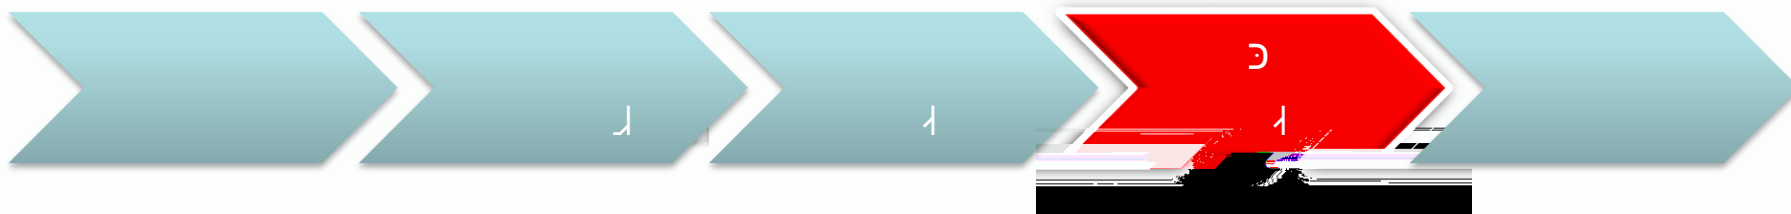

(RG-PA60)

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100




1.



1. 将扩展线卡插入到设备背面的扩展槽中。
将扩展线卡的卡扣对准设备背面的扩展槽，将线卡插入槽中，直到听到“咔哒”声，表示线卡已安装到位。
2. 将扩展线卡的电源线连接到设备背面的电源插座。
将扩展线卡的电源线插入设备背面的电源插座，确保连接牢固。
3. 将扩展线卡的数据线连接到设备背面的数据接口。
将扩展线卡的数据线插入设备背面的数据接口，确保连接牢固。

I .

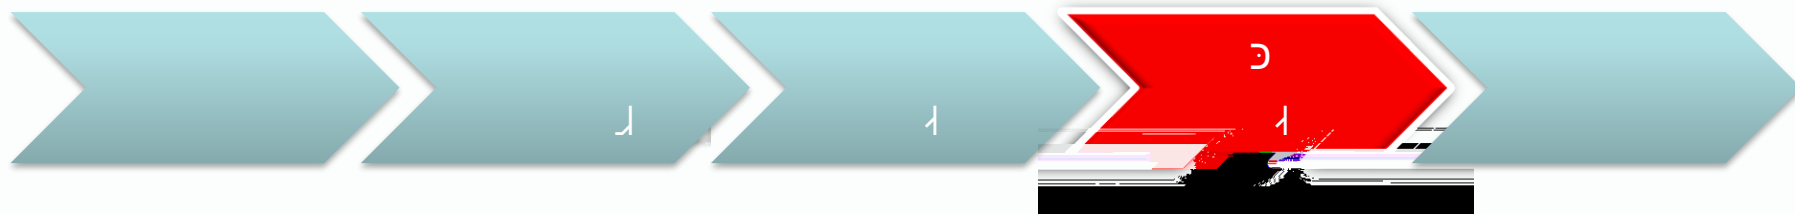


1 . 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100


1.

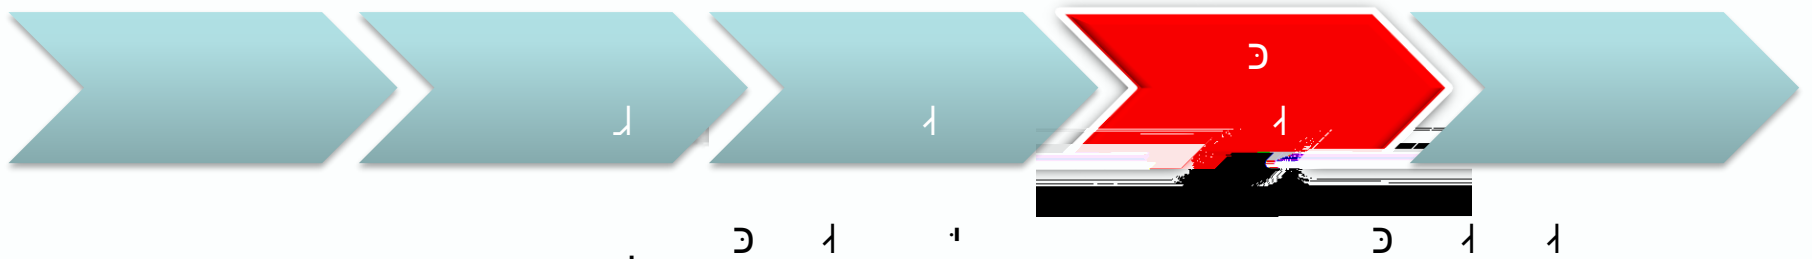

1. 0 1 1

[OBJ] 1

2. 0 1 0 1 1

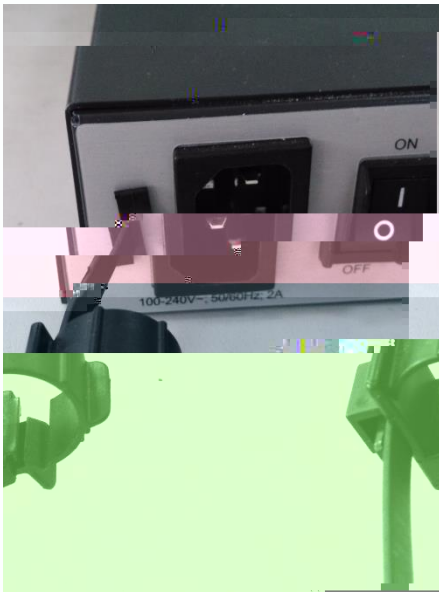

[OBJ]

1

1

~

1

1



RSR20-X/RSR10-X Console EIA/TIA-232 [OBJ]

	RJ-45
	EIA/TIA-232
	9600bps

Contents



כ כ י [OBJ] 7
ל י ה . ל י ל י ל ל

י כ כ
י כ י כ ל “ ON ” ל

6 ף


י [OBJ] ~ ~

WEB

PC[OBJ]IP	IP	OBJ
192.168.1.2~192.168.1.254	.	255.255.255.0
192.168.1.1		

ת 1 WEB



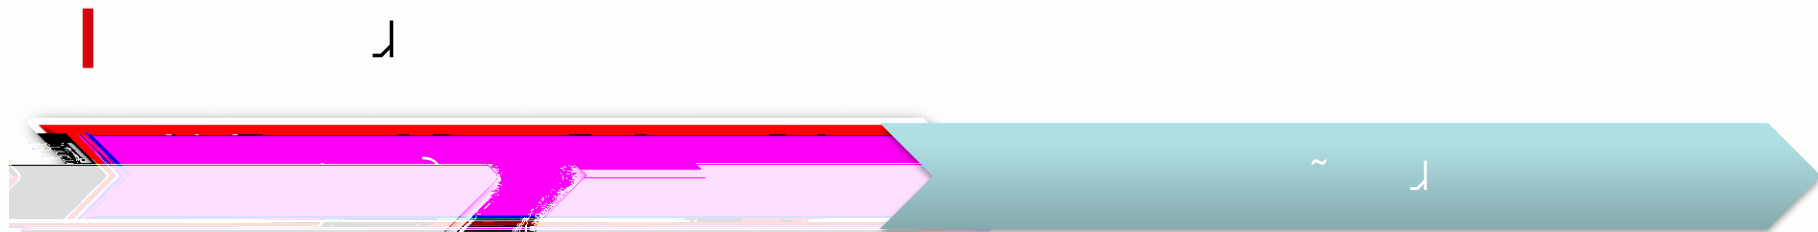

“√ / \” -- “√ / π”

web 1 π . telnet&ssh . 1

修改特权密码


说明： 特权密码是指用户进入特权模式Exec配置层的口令。

密码类型	当前密码	新密码	确认新密码
特权密码	*****	*****	*****
Web用户密码	*****	*****	*****
SSH用户密码	*****	*****	*****

修改WEB密码


说明： WEB用户名为出厂配置，此用户名不可修改！

新密码：	
确认新密码：	

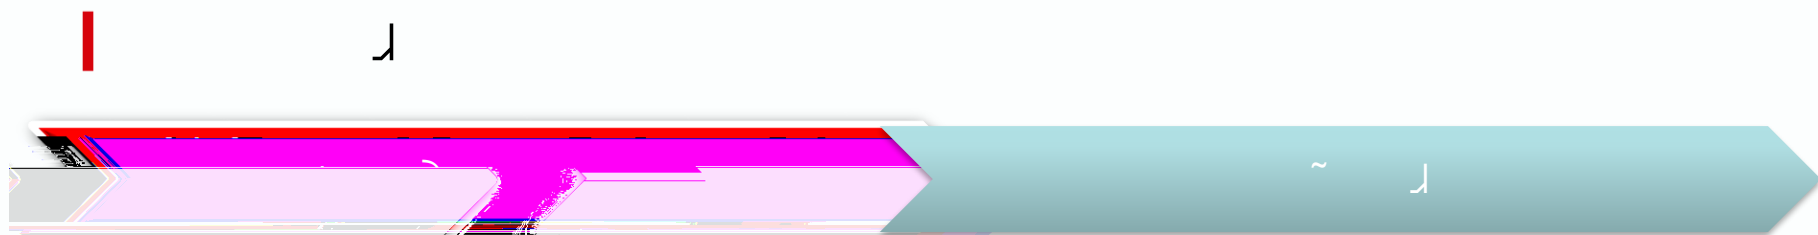


“√ / \ ” -- “ √ ”

设备名称	
	注意： 请勿输入问号、空格、双引号字符！
	设备名称： Ruijie
	确定修改

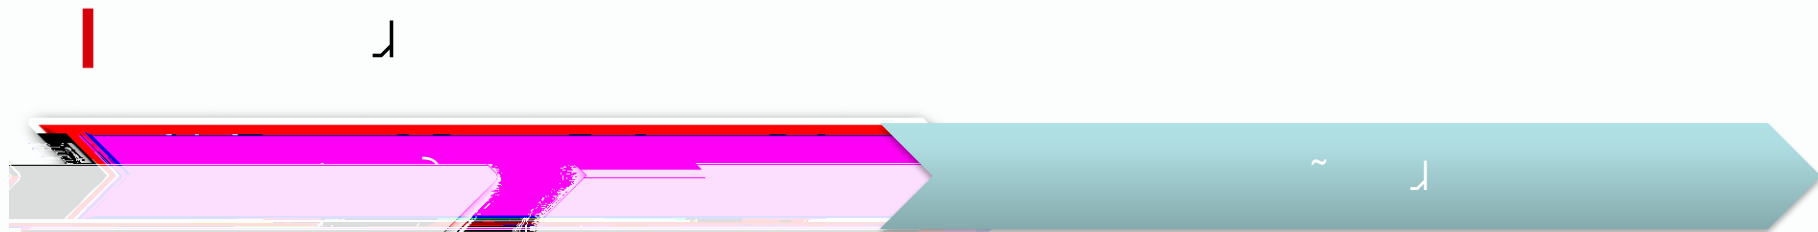

“√ / \” -- “√ / \” √ / \ ~ √ / \ Internet
NTP √ / \

系统时间设置	
当前时间：2016年11月30日 16:26:35	
时区：UTC+8	
设置方式： ☒ 手动设置 ☐ 与Internet时间服务器同步	
重置时间：	0 时 0 分
PC获取时间	保存配置 从

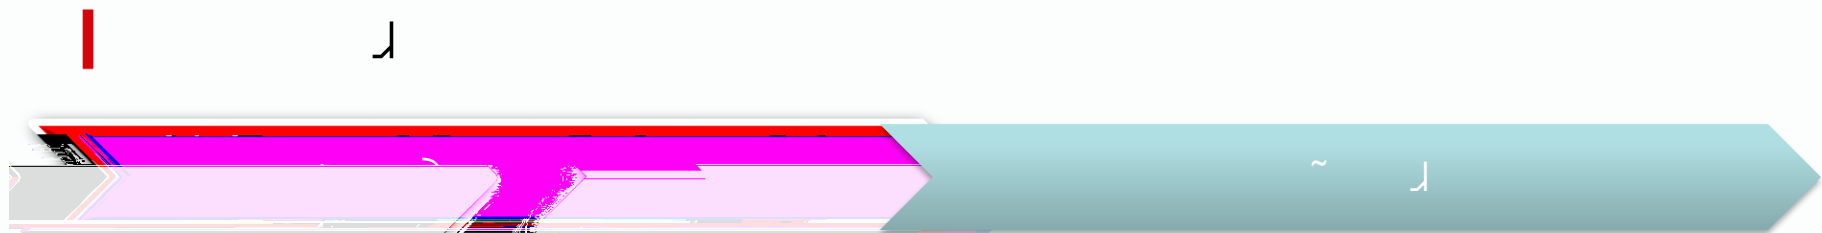

“√ / \” -- “ ” ~



2

CLI

☐ ☐ ☐ ☐ ☐

☐ RS232 ☐

☐ Console

PC ☐ ☐ ☐ ☐

Windows ☐ ☐

☐ Hyperterm(☐ ☐ ☐)

☐ ☐ ☐ ☐

☐ ☐

☐ ☐ ☐

☐

☐ ☐

9600

8

☐ ☐ ☐ ☐

VT100

☐ ☐ ☐





~ 4			
Ruijie>	User EXEC ↑	↓ 1	↑ ~ 1
Ruijie#	Privileged EXEC	↑ ↑ enable	↑ ↓ [OBJ] ↓ [OBJ]
Ruijie(config)#	Global configuration ↓	terminal ↑ configure	↑ [OBJ] ↓ ↓ [OBJ]
Ruijie(config-if)#	Interface configuration ↓	↓ ↑ interface	↑ ↓ ↓ 1 [OBJ] f ↓ ↓ 1 ↑ ↓ 1 ↑



```

Ruijie>enable //
Ruijie#config terminal //
Ruijie(config)#hostname Router // " Router "
  
```

enable

```

Router(config)#enable password ruijie // [OBJ]enable " ruijie "
  
```

telnet

```

Router(config)#line vty 0 4 // 0~4 VTY 1
Router(config-line)#password ruijie // telnet " ruijie "
Router(config-line)#login // telnet
  
```

IP

```

Router(config)#interface GigabitEthernet 0/0 // [OBJ]
Router(config-if-GigabitEthernet 0/0)#ip address 192.168.0.1 255.255.255.0 //
  
```

```

// [OBJ]IP 192.168.0.1 255.255.255.0
  
```



IP

Router(config)#interface vlan 1// [OBJ]vlan

Router(config-if-VLAN 1)#ip address 192.168.10.1 255.255.255.0 // ↓

vlan1 ↴ [OBJ]IP// 192.168.10.1 ↴ . 255.255.255.0

Router(config)#ip route (eougab)-135tEthannet 0/0/0 BT8(255.255.2)-2(.2P AVID 14>> BDC 6

5

www.ruijie.com.cn

www.ruijie.com.cn/service.aspx

support.ruijie.com.cn

webchat.ruijie.com.cn

4008-111-000