






<http://192.168.1.1>
(admin)

WEB

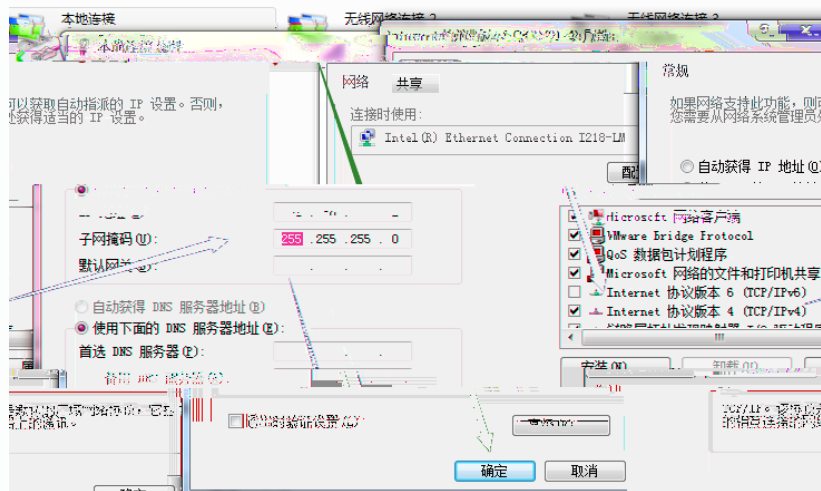

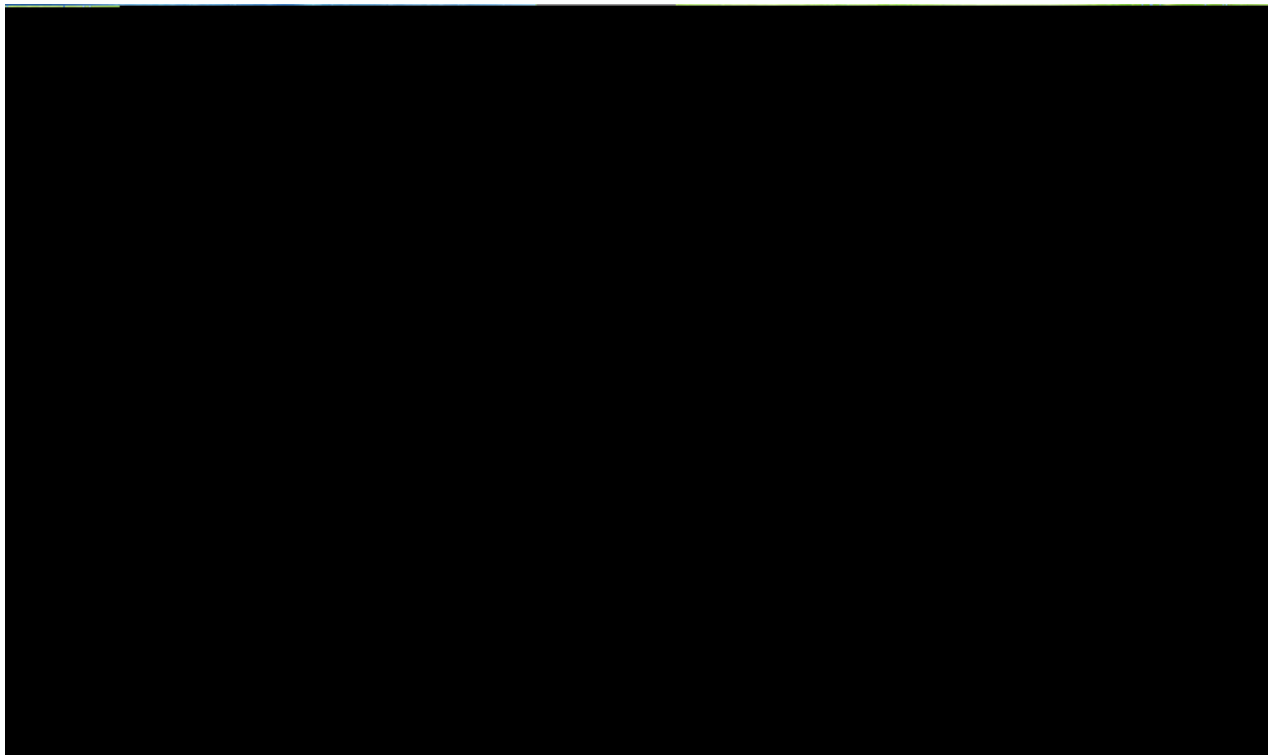

1 组网模式

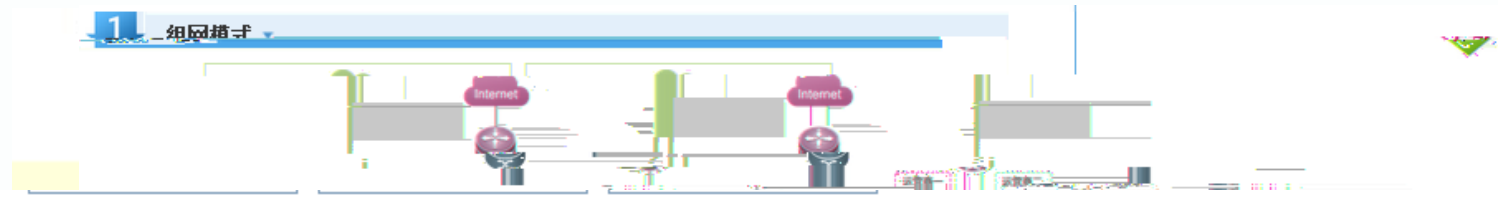

2 配置向导

保持不变

登录密码，默认未开启

配置为600

Web端口: 80 (范围为: 80, 1025-65535, 默认: 80) WEB登录端口, 建议

Telnet密码: sdhah (密码由字母、数字、下划线和横线组成) 用于telnet

保存配置

跳转到首


192.168.1.1 上的网页显示:


保存成功!


确定

参数分别是 接口IP、掩码、网关地址、DNS地址、接口吗、描述

接口	IP地址	掩码	网关地址	DNS地址	接口描述
GE1/0/23	192.168.1.1	255.255.255.0			
GE1/0/24	192.168.1.1	255.255.255.0	192.168.1.254	192.168.1.1	

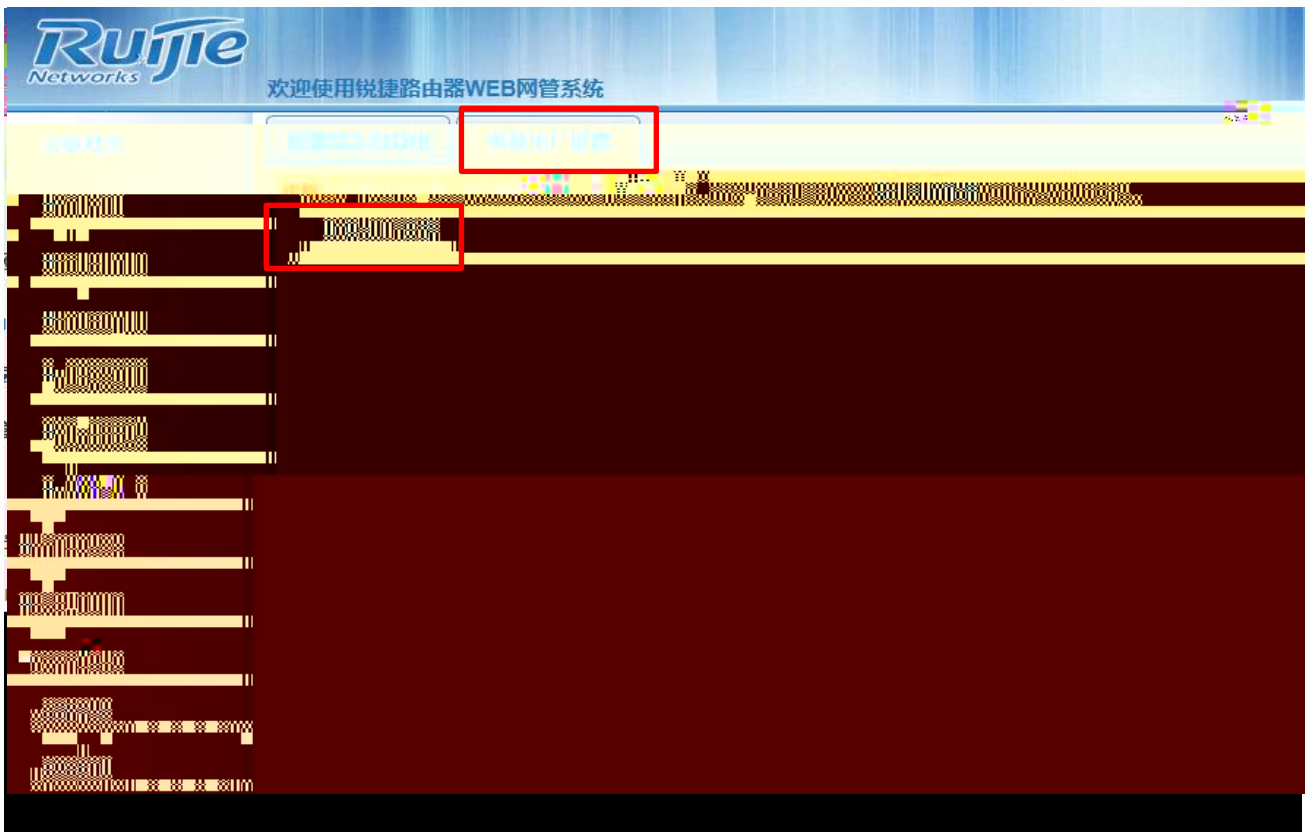

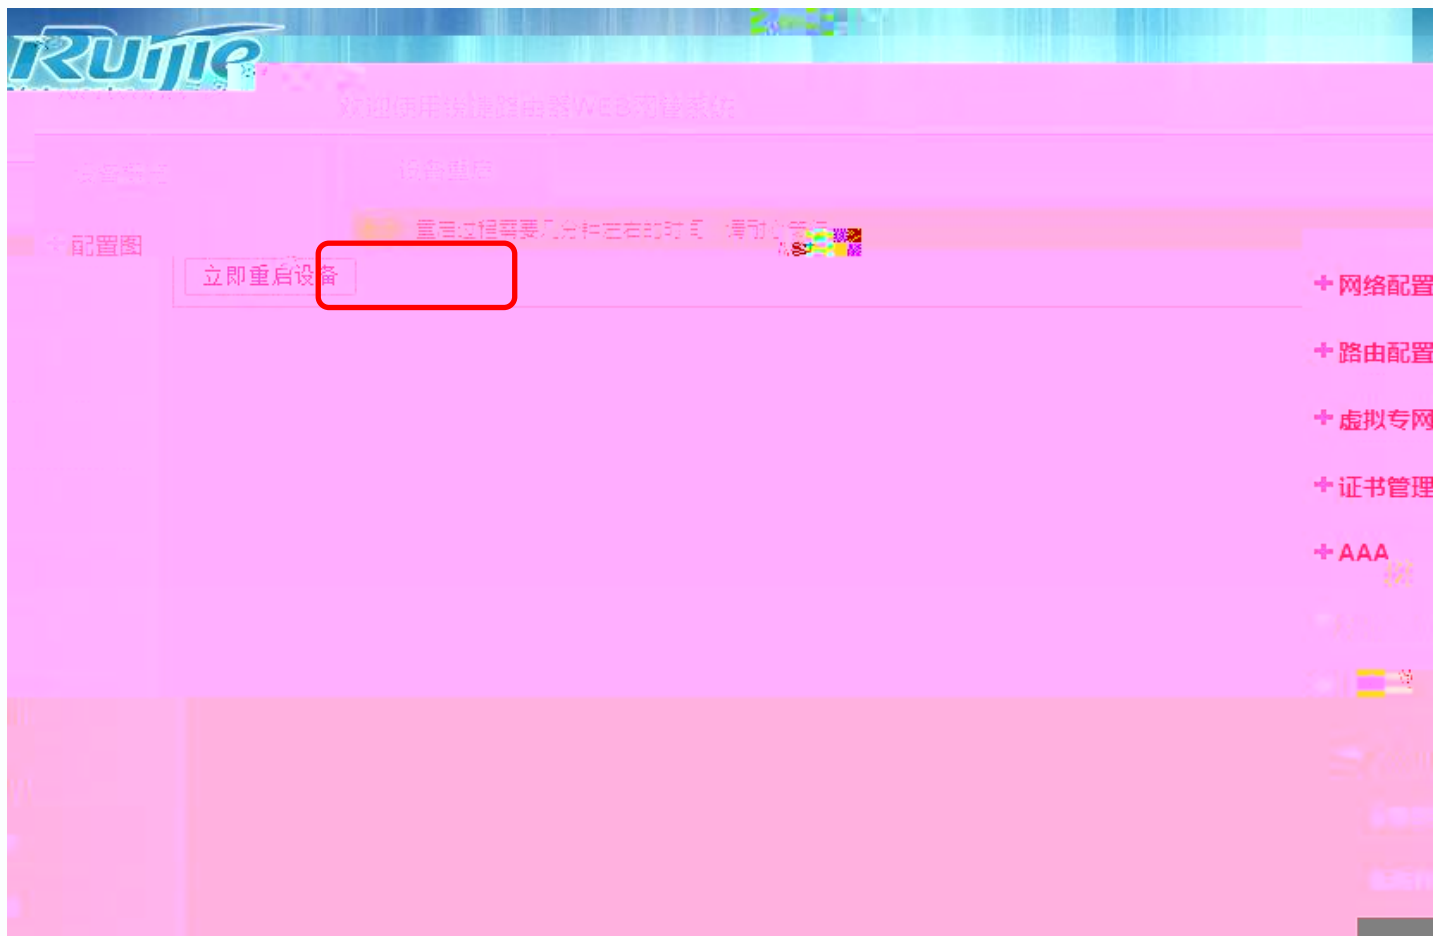

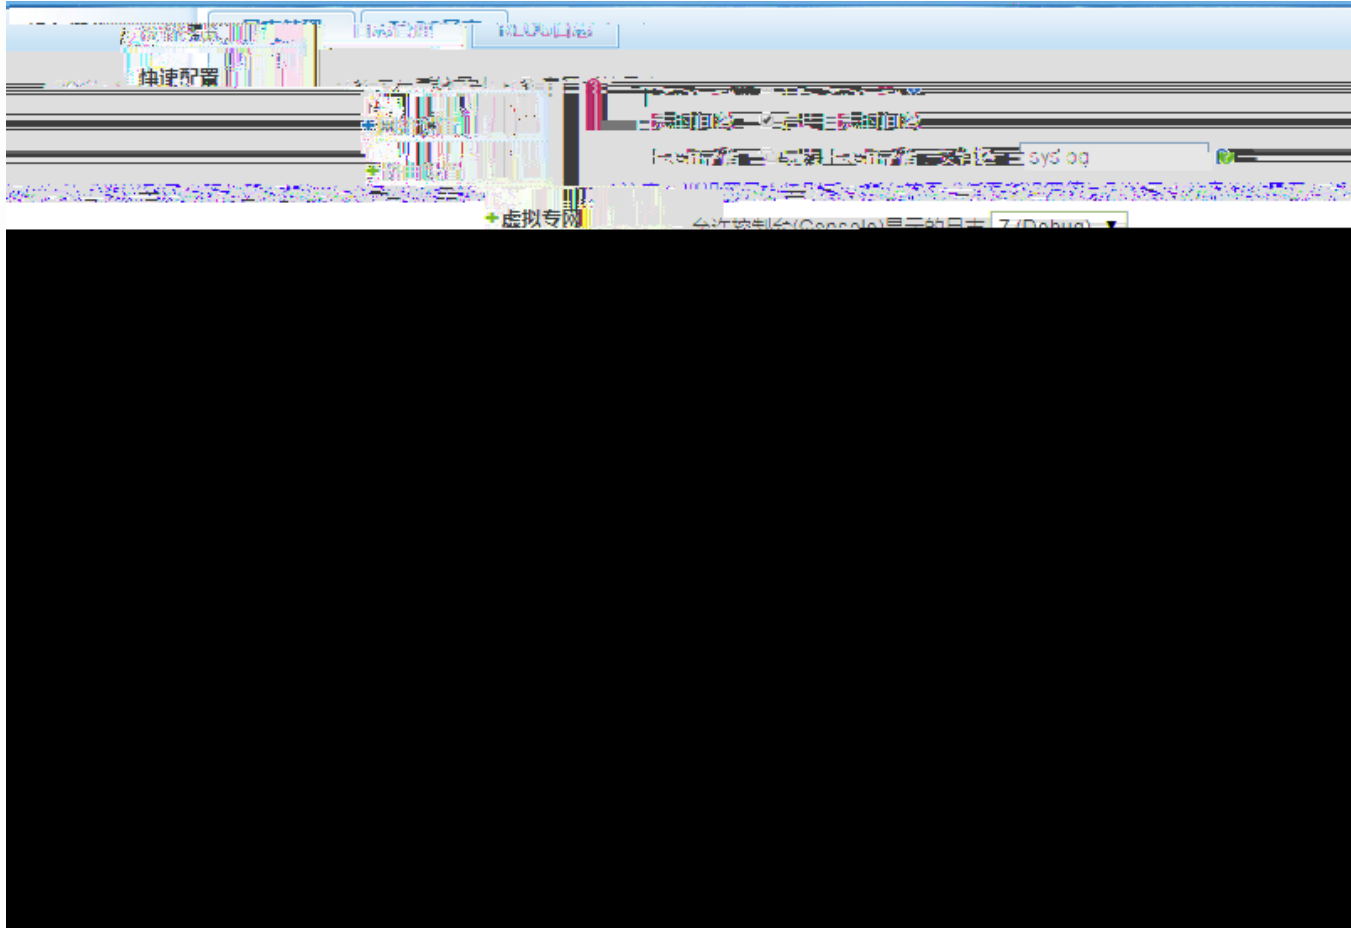



RIIIP

www.riiip.com.cn



www.ruihe.com.cn



```
Ruijie#show interfaces gigabitEthernet 0/0
Index(dec):2 (hex):2
GigabitEthernet 0/0 is UP , line protocol is UP
Hardware is OCTEN GE CONTROLLER GigabitEthernet, address is 001a.a93d.b84f (bia 001a.a93d.b84f)
Interface address is: no ip address
ARP type: ARPA, ARP Timeout: 3600 seconds
  MTU 1500 bytes, BW 1000000 Kbit
  Encapsulation protocol is Ethernet II, loopback not set
  Keepalive interval is 10 sec, set
  Carrier delay is 2 sec
  Rxload is 1/255, Txload is 1/255
  Queueing strategy: FIFO
    Output queue 0/40, 0 drops;
    Input queue 0/75, 0 drops
  Link Mode: 1000M/Full-Duplex, media-type is twisted-pair.
  Output flowcontrol is off;Input flowcontrol is off.
  5 minutes input rate 496 bits/sec, 0 packets/sec
  5 minutes output rate 13 bits/sec, 0 packets/sec
  431 packets input, 40593 bytes, 0 no buffer, 0 dropped
  Received 429 broadcasts, 0 runts, 0 giants
  0 input errors, 0 CRC, 0 frame, 0 overrun, 0 abort
  0 packets output, 40593 bytes, 0 collisions, 0 late collisions
```

将日志



本次开机运行 后面的 的





RIIIP

www.riiip.com.cn




RIIIP

www.riiip.com.cn



www.ruihe.com.cn



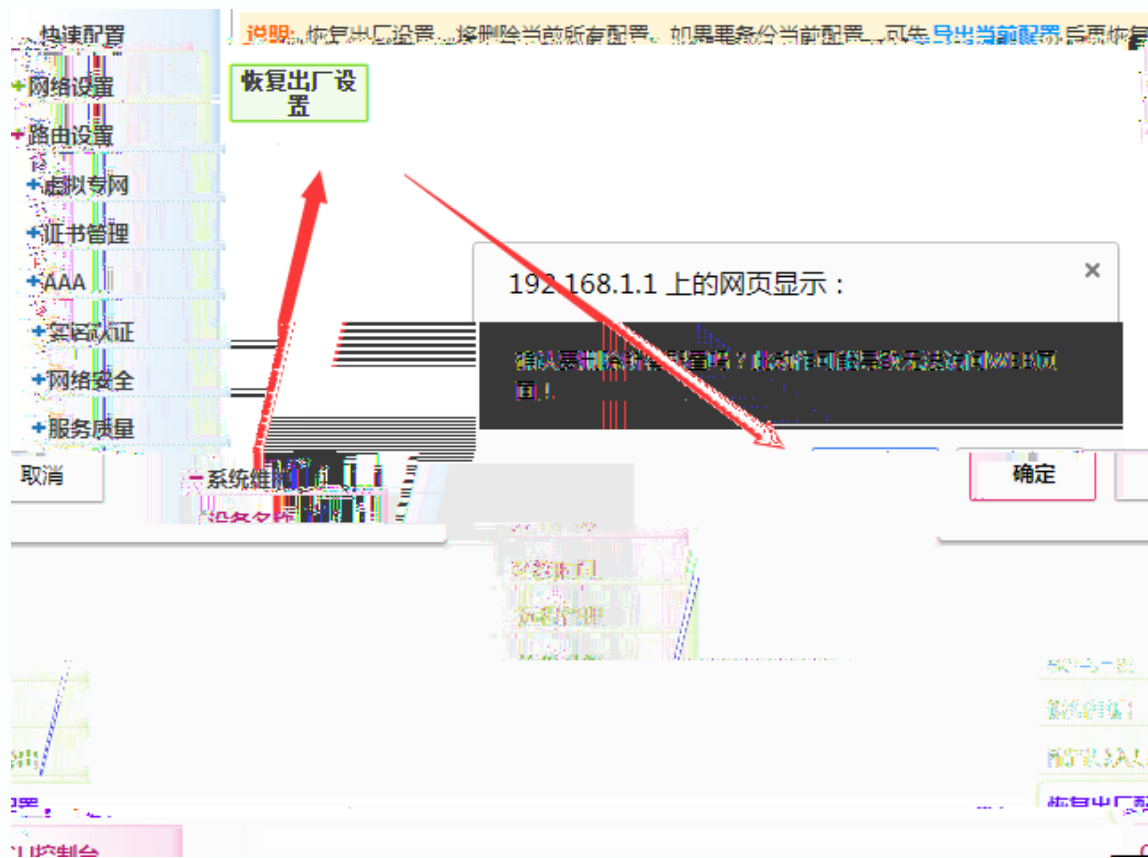



www.ruihe.com.cn



RIIIP

www.riiip.com.cn



RIIIP

www.riiip.com.cn



The screenshot displays a network management interface with a sidebar on the left containing menu items: 快速配置, +网络设置, +路由设置, +虚拟专网, +证书管理, +AAA, +实名认证, and 网络安全. The main content area is divided into several sections:

- 注意事项:** A yellow box containing instructions: "1.可升级系统固件(*.bin),文件上传完成后,必须重启设备才能生效。" and "2.可升级WFR包(*.wfr)...文件上传完成后,按OTDR+R刷新系统..."
- 版本信息:** A grey box showing: "硬件版本: 1.00" and "软件版本: RGOS 10.4(3b75) Release(208720) (备份bin包)".
- 软件升级:** A section with a progress bar showing "升级进度: 0%" and "状态信息: 升级文件为: rgos.bin".
- 系统时间:** A box showing the current system time.
- 开始升级:** A button with a red arrow pointing to it.
- 软件升级:** A button with a red arrow pointing to it.



www.ruihe.com.cn



RIIIP

www.riiip.com.cn



RIIIP

www.riiip.com.cn

