

RG-MF2920U

MF2920U_1.0(1)B1 WEB

V1.2

2022-03-18

copyright © 2022



-
-
-
-
-
-
-
-
-
-

<http://www.ruijie.com.cn>

<http://www.ruijie.com.cn/fw/>

7*24h

<http://ocs.ruijie.com.cn>

7*24h

4008-111-000

--

<http://www.ruijie.com.cn/special/fw/tool/xryf/>

4008111000@ruijie.com.cn



APP



1 Web

1.1

Web chrome WEB Web



MF2920U

1.2

WEB	WEB
---------------------	-----

1.2.1 WEB




1. WEB PC
2. Google chrome 360 qq edge
WEB
3. 1600*900 1920*1080

1.3 WEB

1.3.1

IP IP 192.168.1.200 PC

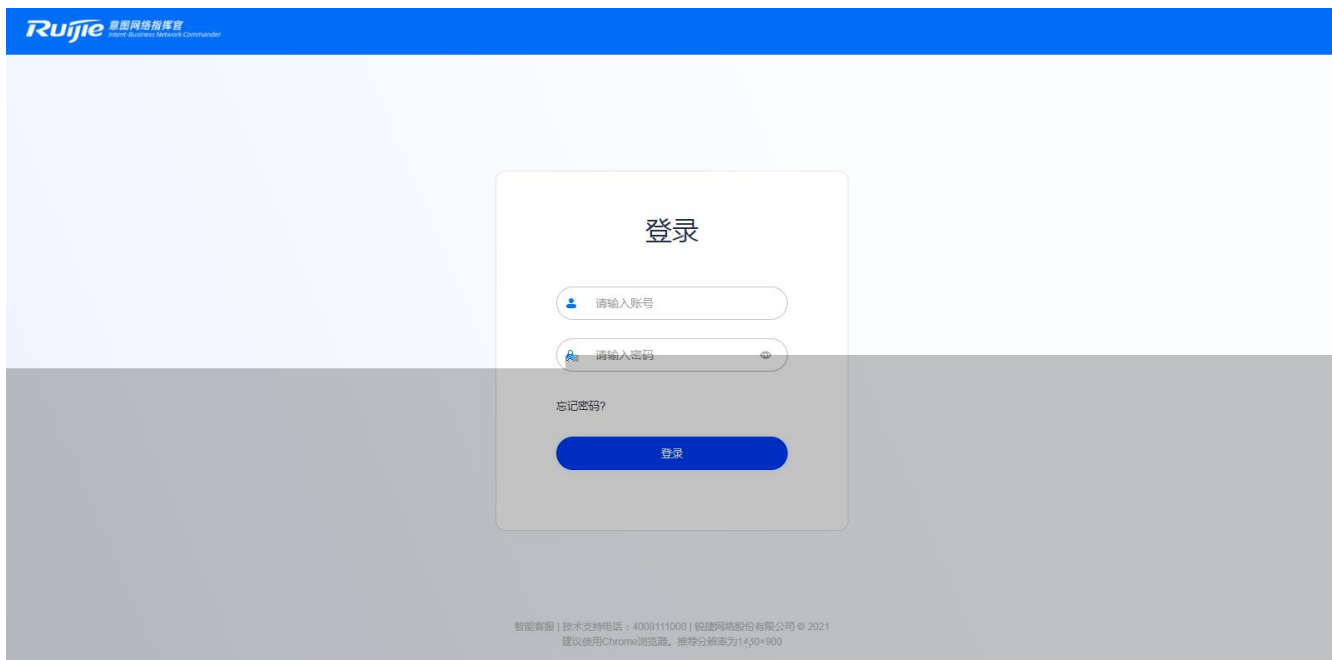

1. / admin/admin " "
2. " "
3. 4008111000
4. 5 10



1.3.2

Web

Ruijie
型号: RG-MF2920U-4GT1MS

设备概况

设备端口状态

重新获取设备端口状态

17:28:02:17

设备MAC: 00:16:78:18:22:26

1F 1 2 3 4

序列号: LIN095570119

1.3.3.3 POE /ARP

The screenshot shows a network management interface with two tables. The top table displays POE statistics: 总功率: 126 W and 剩余功率: 126 W. Below it is a table with columns: MAC地址, 端口, 端口, POE开关设置, 供电状态, 供电功率, and IP地址. The first row shows MAC地址 00d0.f822.33b9, 端口 Gi0/2, 端口 Gi0/1, POE开关设置 开启, 供电状态 关闭, 供电功率 0, and IP地址 172.29.15.1. The bottom table shows ARP entries with a total of 1 entry (共 1 条).

MAC地址	端口	端口	POE开关设置	供电状态	供电功率	IP地址
00d0.f822.33b9	Gi0/2	Gi0/1	开启	关闭	0	172.29.15.1

共 9 条	共 1 条

- POE

POE < > POE

- ARP


ARP < > ARP


1.3.4

1.3.4.1


1.3.4.1.1

1.3.4.1.1.1

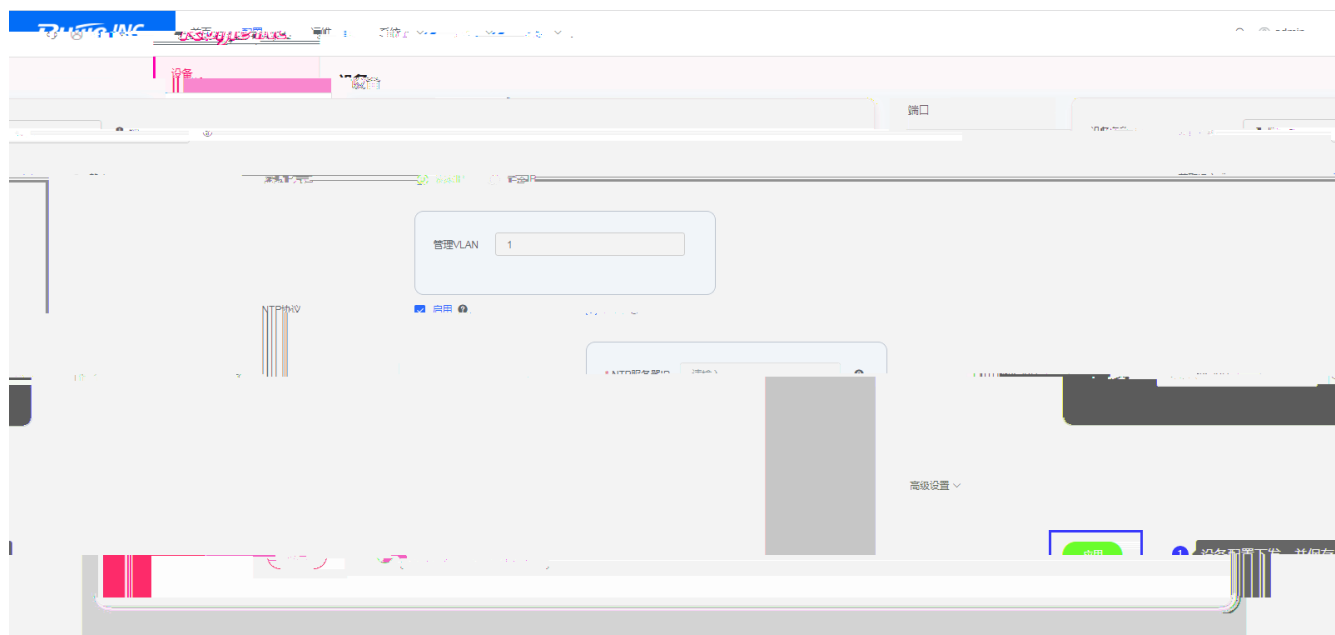


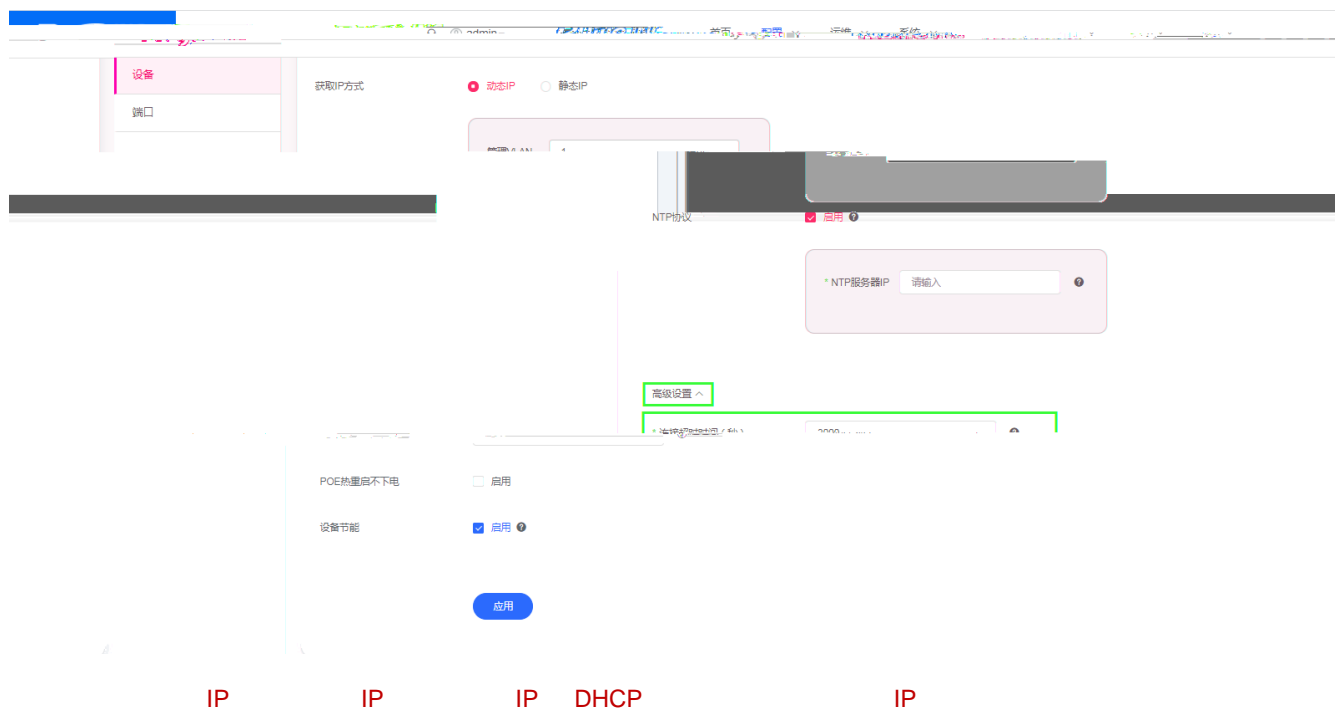

1.3.4.2



-



1.3.5

1.3.5.1


1.3.5.1.1 Ping

Ping IP < >

```
Sending 5 ICMP Echoes to 172.29.15.1, timeout is 2000 milliseconds:  
ping: recv 172.29.15.1 0 ms  
ping: recv 172.29.15.1 2 ms  
ping: recv 172.29.15.1 2 ms  
ping: recv 172.29.15.1 0 ms  
ping: recv 172.29.15.1 0 ms  
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/2 ms
```

检测后的内容

1.3.5.1.2

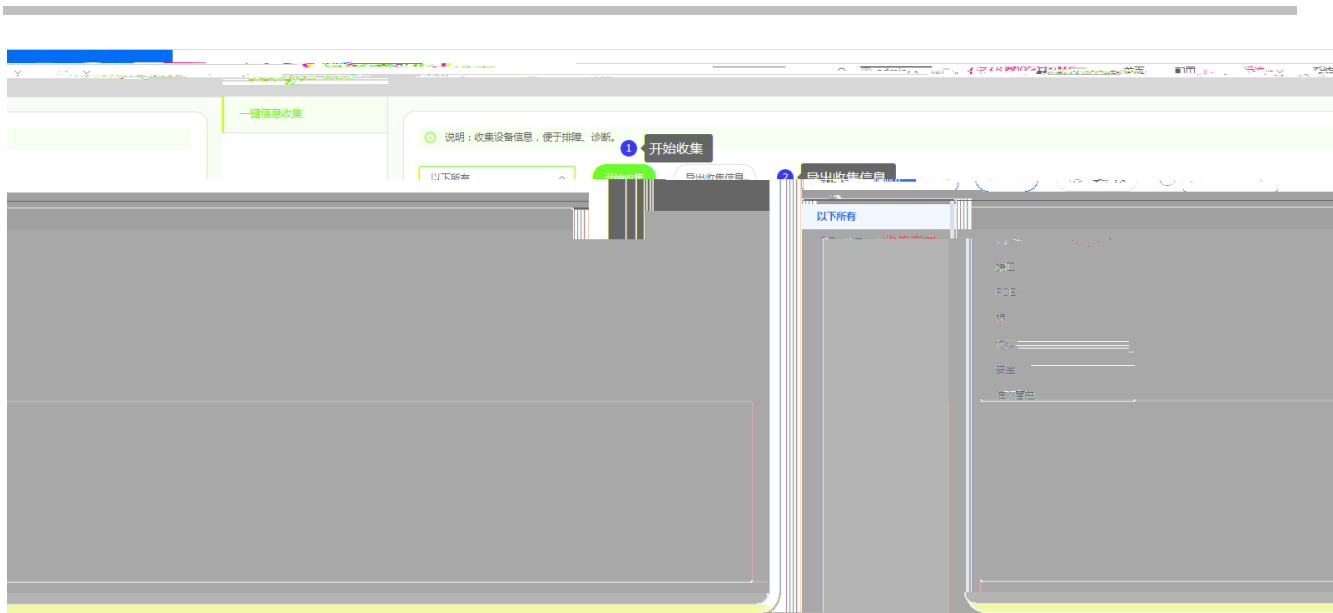

_20220118182247.txt

设备升级

说明: 您可以...

当前设备版本: MF2920U_1.0(1)R1 Release/091423231 Build: M23504802232022

Ruijie INC 首页 配置 运维 系统 admin

设备升级


说明: 您可以到官方网站下载对应型号的软件版本到本地, 然后通过下面的方式升级到设备中。

当前设备版本: MF2920U_1.0(1)R1 Release/091423231 Build: M23504802232022

提示

确定

1.3.5.2.3 Boot

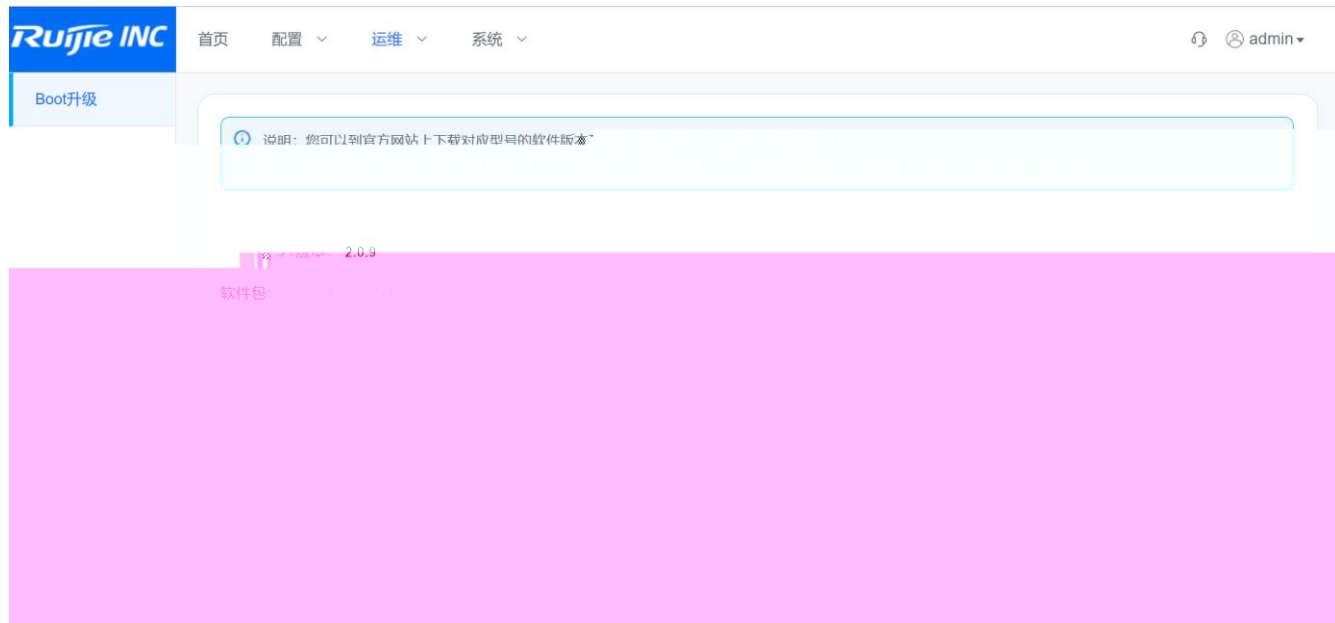


boot


1.3.5.3

1.3.5.3.1

1.3.5.3.1.1

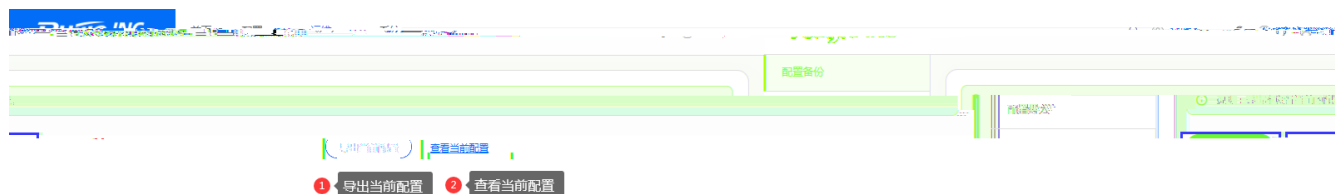

●

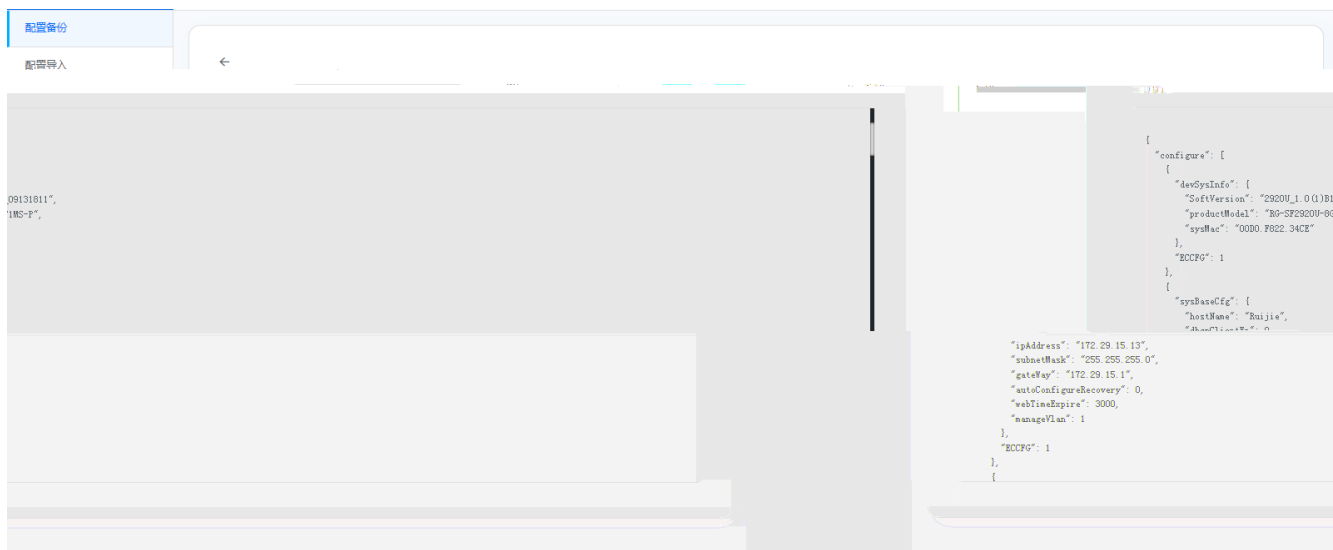

1.3.5.3.1.2



- < > < >
- < >

1.3.5.3.2

2-3






```
Ruijie(diag)ping 192.168.193.1
Sending 5, ICMP Echoes to 192.168.193.1, timeout is 2000 milliseconds:
ping: rcv 192.168.193.1 1 ms
ping: rcv 192.168.193.1 0 ms
ping: rcv 192.168.193.1 1 ms
ping: rcv 192.168.193.1 0 ms
ping: rcv 192.168.193.1 0 ms
Success rate is 100 percent (5/5),round-trip min/avg/max = 0/0/1 ms
Ruijie(diag)#
```