



~ ù

RG-IDP 2500E V2.0

ñ " ° " V1.0



©2013-2021

7 1

3 5 4 1

<http://www.ruijie.com.cn/>

<http://webchat.ruijie.com.cn>

<http://www.ruijie.com.cn/service.aspx>

7 × 24

4008-111-000

<http://support.ruijie.com.cn>

service@ruijie.com.cn

3 1

1 " — 4

	RG-IDP 2500E V2.0
	1.0

1 1

RG-IDP 2500E V2.0

IPSec SSL VPN Web

IPv4 IPv6 NAC SSL RG-

IDP 2500E V2.0

RG-IDP 2500E V2.0

1.1 RG-IDP 2500E V2.0

— A

	RG-IDP 2500E V2.0
	0 to 40°C
	-25 to 70°C
	20% 90% RH
	5.6Kg
	254 x 432 x 44 L * W * H mm 1RU
	100-240 VAC, 50-60 Hz
	110 V / 3 A, 220 V / 1.5 A
/	35.1W/38.7 W
	119.77 BTU/h

RG-IDP2500E A

RG-IDP 2500E V2.0

1

/HA 2 RJ45 WAN 2 DMZ 1 SFP 1 USB 38 GE RJ45 1 Console 2 GE RJ45

1-1 RG-IDP 2500E V2.0



ω ω ^ ð

RG-IDP 2500E V2.0 1-2

2 II

2.1

RG-IDP 2500E V2.0

2.1.1

1~10

“ 3.8

2.2.3

RG-IDP 2500E V2.0

RG-IDP 2500E V2.0

0°C-40°C	20%-90%
----------	---------

1.5M

0.4M

2.2.4

	0.5	1	3	5
/	1.4 x 10	7 x 10	2.4 x 10	1.3 x 10

RG-IDP 2500E V2.0


	mg/m ³	mg/m ³
--	-------------------	-------------------

2.2.7 EMI 1[~]

3 U

RG-IDP 2500E V2.0

3.1 ∫

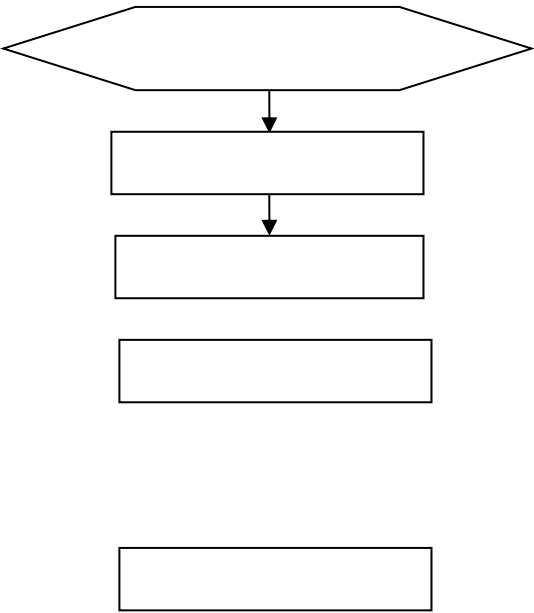

3.2 U

RG-IDP 2500E V2.0

3.3 $\bar{U}$

† $\bar{O}$

5mm

1.5cm

¶ 9

1)

2)

3)

RG-IDP 2500E V2.0

RG-IDP 2500E V2.0

3.4 Ū Ŷ Ū

↑ Œ

RG-IDP 2500E V2.0

10mm

- Ŷ 9
- 5)
- 6)
- 7)

3.5 Ū ∫ ≈ ∥[⌢] ≈ ∥[⌢] 4

↑ Œ

16A

- Ū " Ŷ 9
- 8)
- 9)

3

1.5

14AWG

3.6 Ū Ū √ √

↑ Œ

Ü " ı 9

10)

19)

α

1.

2.


SFP

3.

SFP

4.

SFP

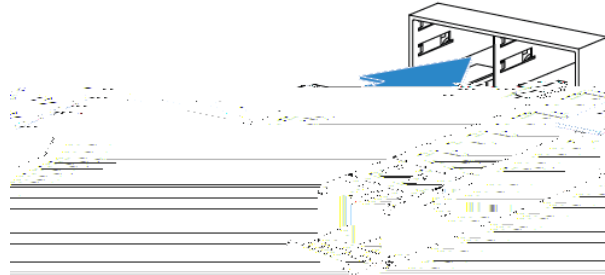

3-7

5.

6.

SFP

SFP

3.10 'H'O Ỹ ĩ ũ 4

'H'O 4

SFP

20)

21)

22)

23)

24)

SFP

4 1 1

4.1 Ω 1 J

Ω J


PC

Console

.


Ü ≈ ↓

25)



29)


4-3

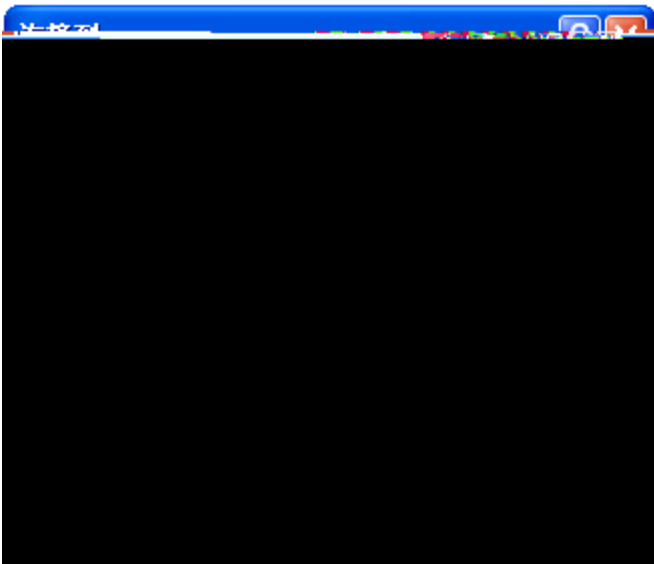

30)


4-4

31)

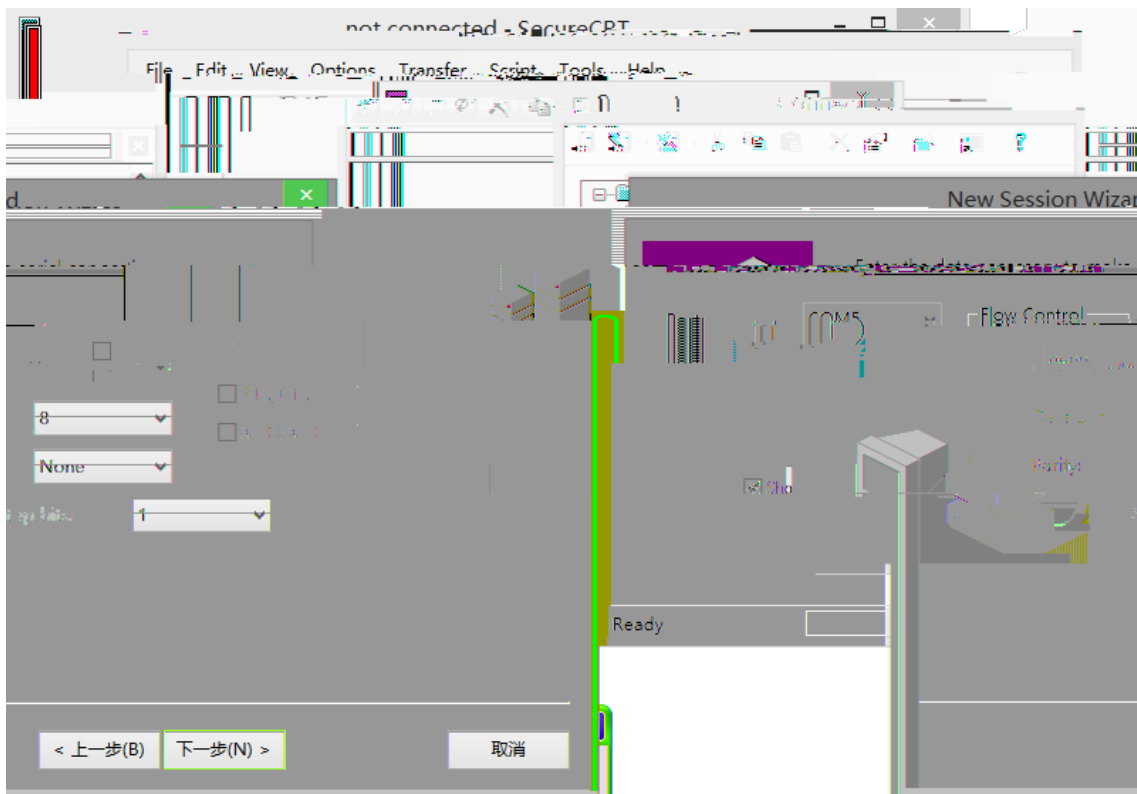

4-9

“ ”

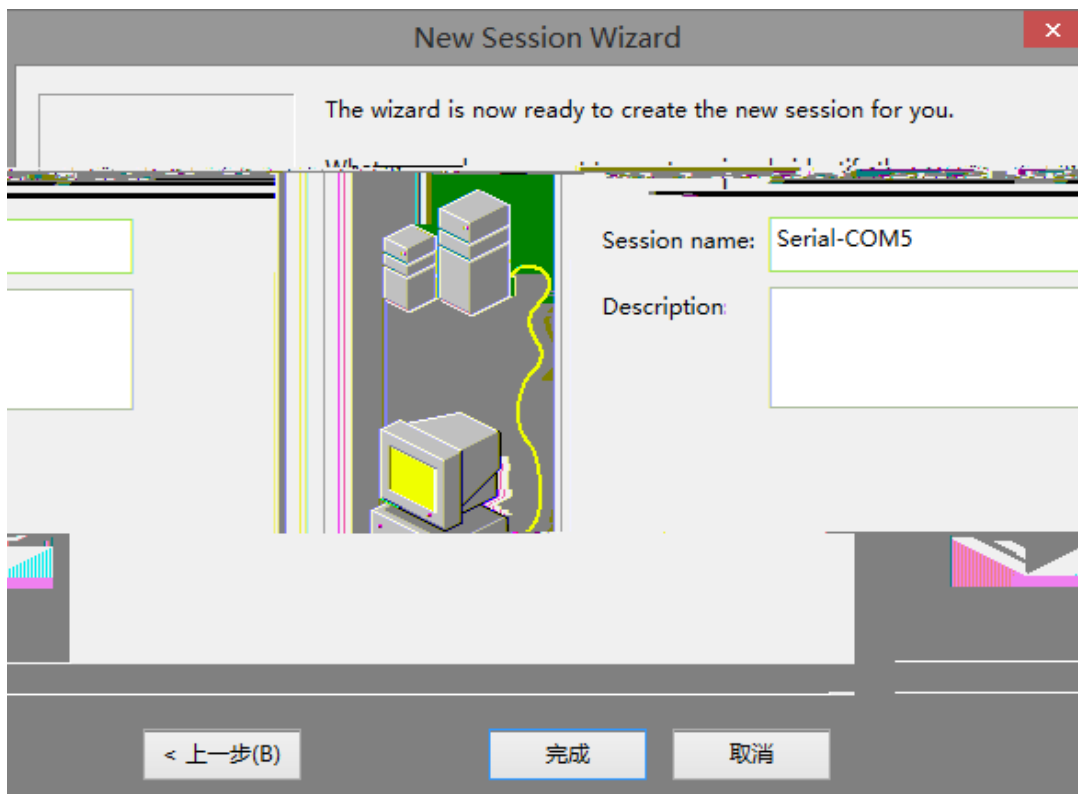

4-10



4-11

4.2 ≡

≡ 11

5 1 2 3 4

5.1 1 2 3 4

RG-IDP 2500E V2.0
5-1 RG-IDP 2500E V2.0



RG-IDP 2500E V2.0


RG-IDP 2500E V2.0	RG-IDP 2500E V2.0	Internet	Telnet	RG-
IDP 2500E V2.0	RG-IDP 2500E V2.0			

5.2 1 2 3 4

1 2 3 4

6 6.1 6.2

6.1

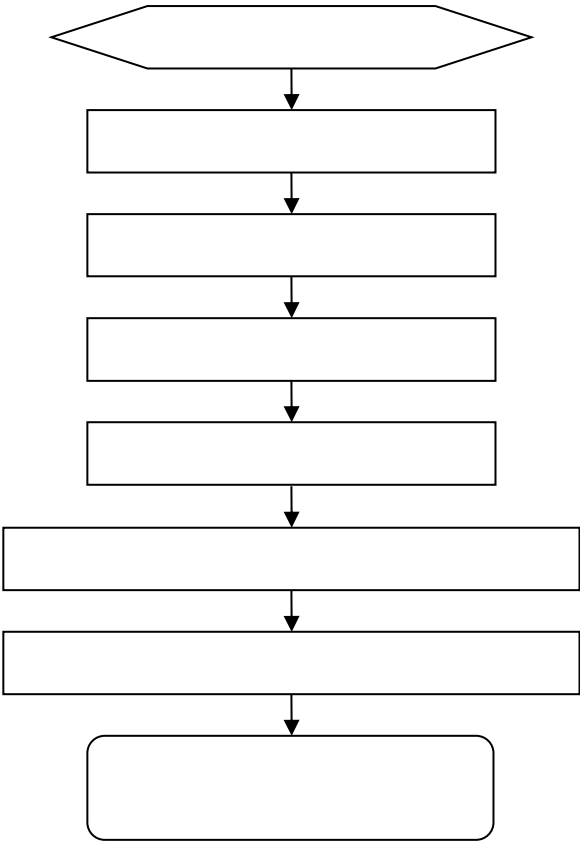

6.2

6.2

6.2

Status Power

6.2

ǎ

ǔ

ǐ

ǎ

ǔ ←

link

1

2

1310nm

1550nm

3

4

E A Ü Ü "Ω


~

1000BASE-T/100BASE-TX/10BASE-T

MDI/MDIX Crossover

1000BASE-T IEEE 802.3ab 1000BASE-T 100-ohm 5 5 UTP STP
100 4 4 1000BASE-

A-1 1000BASE-T

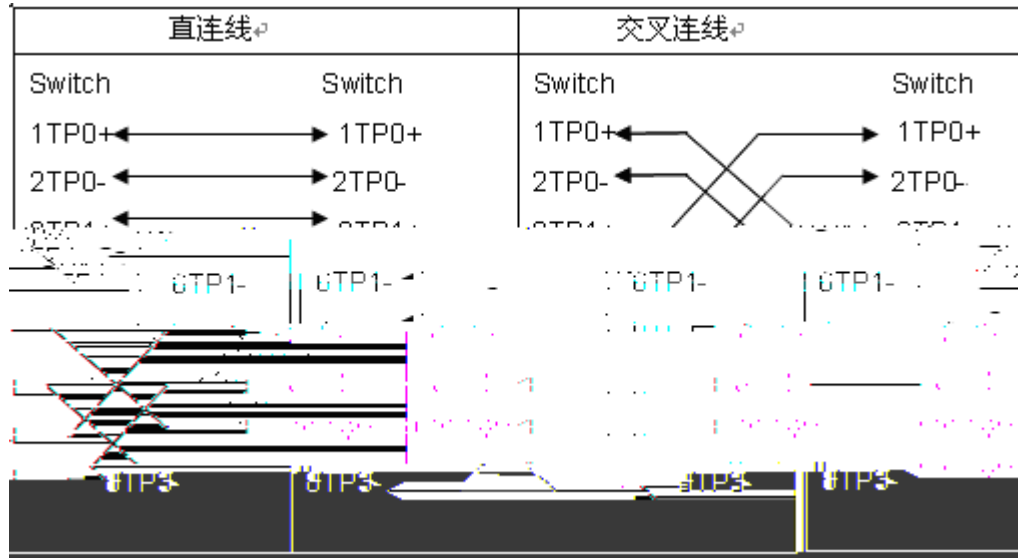


100BASE-TX/10BASE-T 100-ohm 5 100 10Mbps 100-ohm 3,4,5 100BASE-TX/10BASE-T 100Mbps

A-2 100BASE-TX/10BASE-T

Pin	插座	插头
1	Input Receive Data+	Output Transmit Data+
2	Input Receive Data-	Output Transmit Data-
3	Input Receive Data+	Output Transmit Data-
4	Input Receive Data-	Output Transmit Data+

100BASE-TX/10BASE-T

A-3 100BASE-TX/10BASE-T

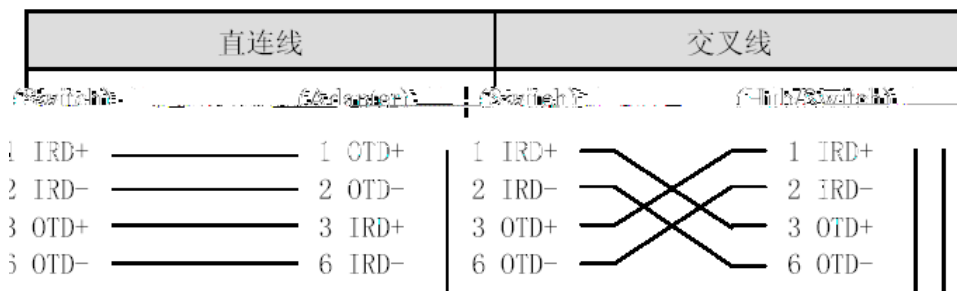

4 M 0 Ü

A 4



E B

U V Ů ů

RG-IDP 2500E V2.0

19

≤ √ ʳ Ā Ē ě ů ₧

5

7

7

10

SFP+

5

10

√ ʳ ĥ Ā Ē ě ů ₧

25

dž

₧

e

E

₧

D-3

D-3

220V 41712 Tm0.2 Gp0.2 CID .0004 BDC 0.000008871 0 595.32 841.92 re2BT/F5 9 T1 0 0 1 103.34 238.49 Tm0.2 g0.2 G

mm