

RG-IIB-HS1000E V2.00

V1.1

2022-07-28

copyright © 2023

<http://www.ruijie.com.cn>

<http://www.ruijie.com.cn/fw/>

7*24h

<http://ocs.ruijie.com.cn>

7*24h

4008-111-000

--

<http://www.ruijie.com.cn/special/fw/tool/xryf/>


4008111000@ruijie.com.cn

doc@ruijie.com.cn



APP

1.



/

2.

	1
1	1
1.1	1
1.2	2
1.3	3
2	4
2.1	4
2.2	4
3	5
3.1	5
3.2	6
4	8
4.1	8
4.2	11
5	12

1

RG-IIB-HS1000E V2.00

RG-IIB-HS1000E V2.00


CMOS Complementary Metal-Oxide-Semiconductor

1.1

1-1

1		1	
2	&	1	
3		1	
4		1	
5	USB	1	
6		4	
7		4	

1-1

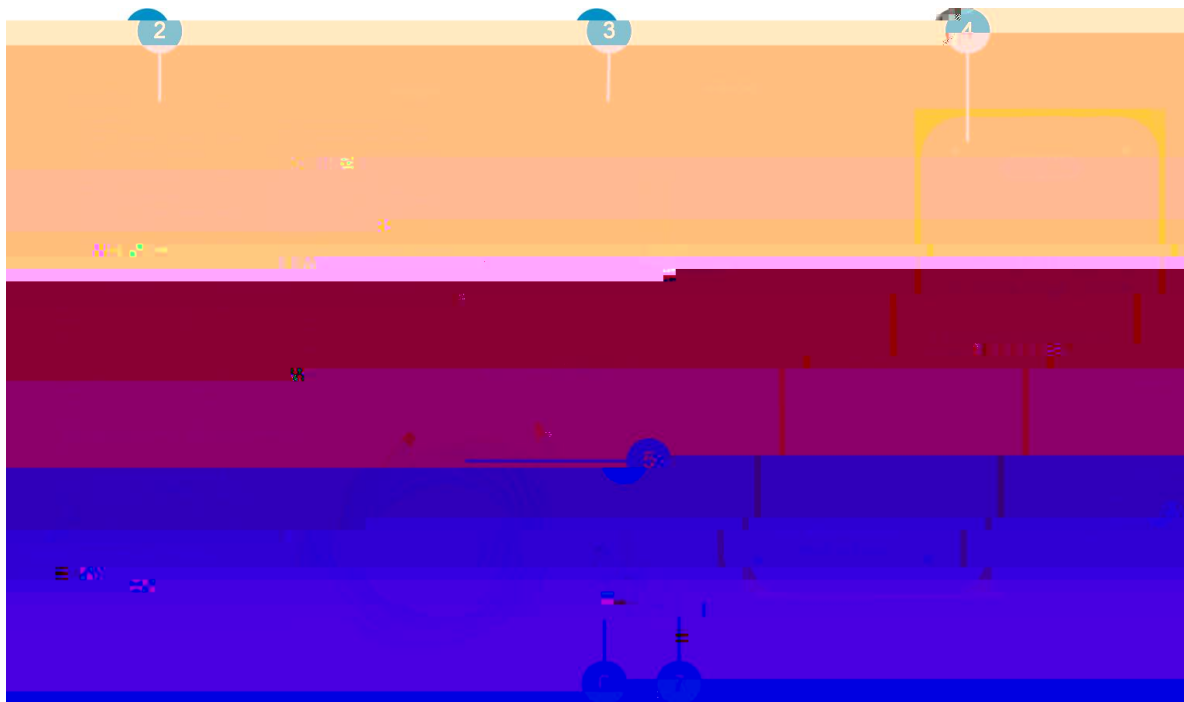

1.2

1-2

1-2

1	USB	USB 2.0
2		-
3		
4		/

5

RG-IIB-HS1000E V2.00	
	CMOS
	LED
USB	2 USB 2.0
	USB 2.0
	USB 5V

2

2.1

2-1

	8mm
	PH2

2.2

3

3.1

(1)

(2)

a

1.5

25

1.5

3-1



b

4

c

35mm~40mm


d

4




2mm

3-2

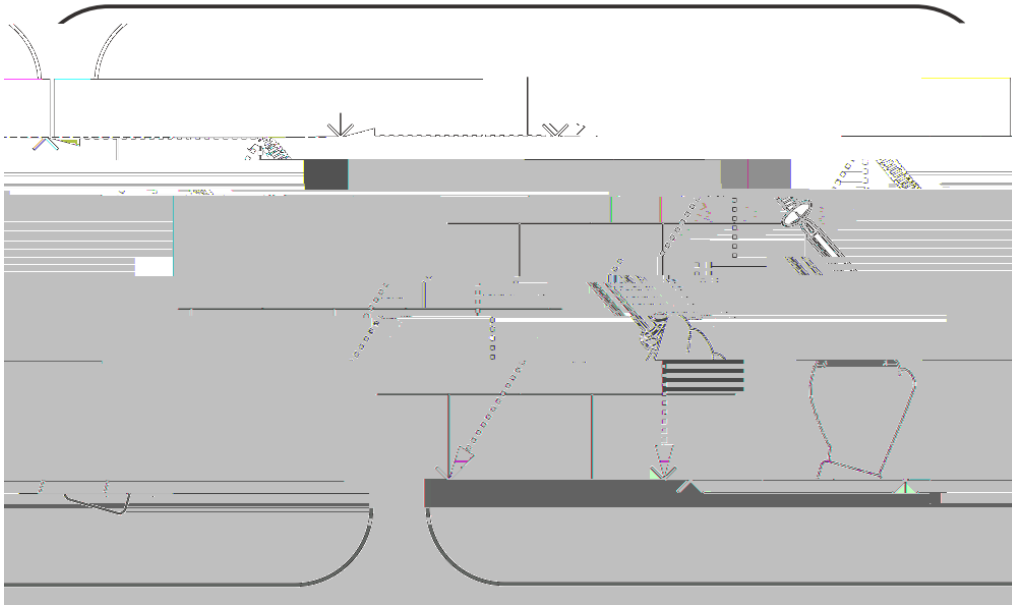

(3)

3-3

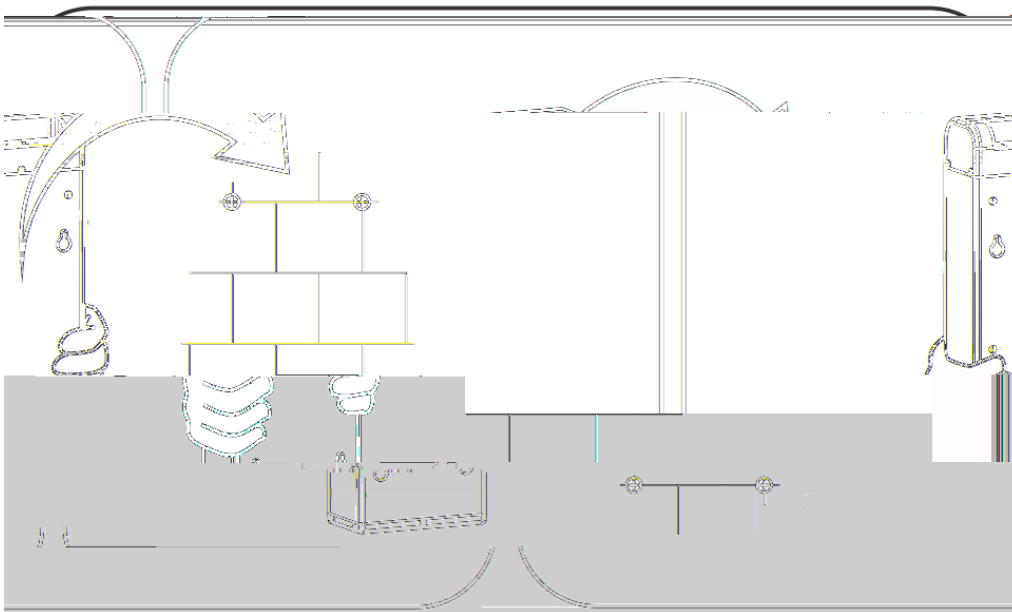

3.2

(1) USB

Type-B

PC-USB

3-4 USB



(2) USB Type-A OPS USB

3-5 USB OPS



4

4.1



/

- V2.00

V1.11.2.7

-

<https://whiteboard.ruijie.com.cn/>

(1)

(2) OPS

a

4-2

b

- []
-

4-3

c

< >

4-4

(3) < >

RG-IIB-HS1000E_V2

4.2

4-1

1		USB OPS	<ul style="list-style-type: none">• USB USB• OPS USB USB• OPS•• USB USB
2			<ul style="list-style-type: none">• OPS USB %

5

(1) USB

(2)

5-1

(3)

5