




WEB

APP

CLI

WEB

WEB

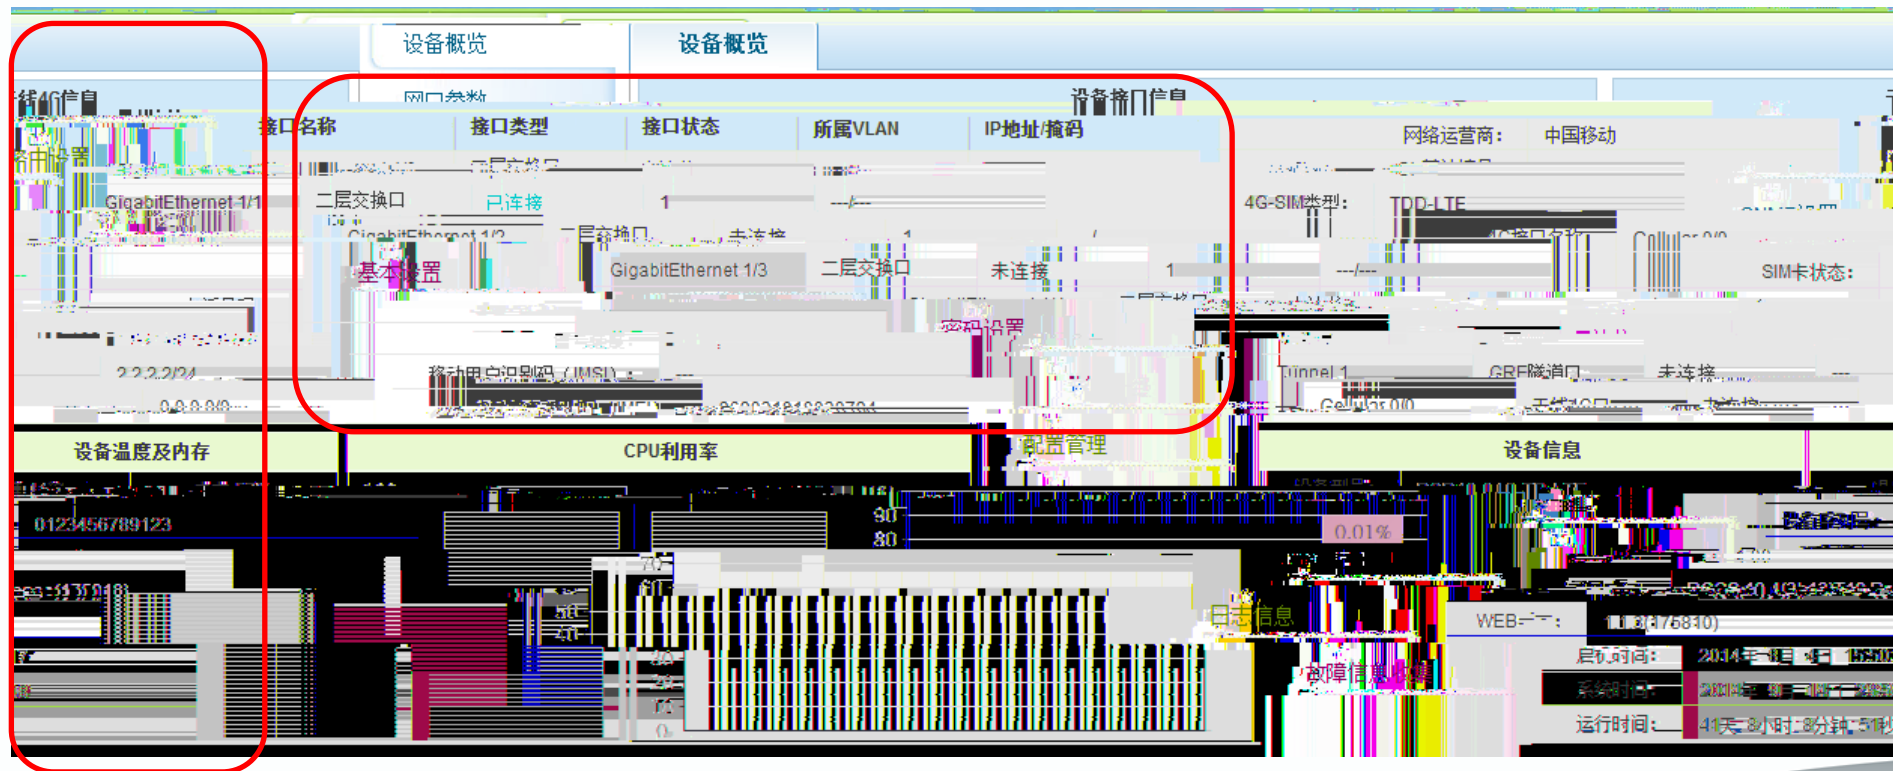

WEB

“ config.text ”
.text

设备概览

配置导入与导出

恢复出厂设置

网口参数

说明: 恢复出厂设置, 将删除当前所有配置。如果要备份当前配置, 可先 [导出当前配置](#) 后再恢复出厂设置。

恢复出厂设置

路由设置

配置管理


重启

信检测

志信息

Ruijie

WEB

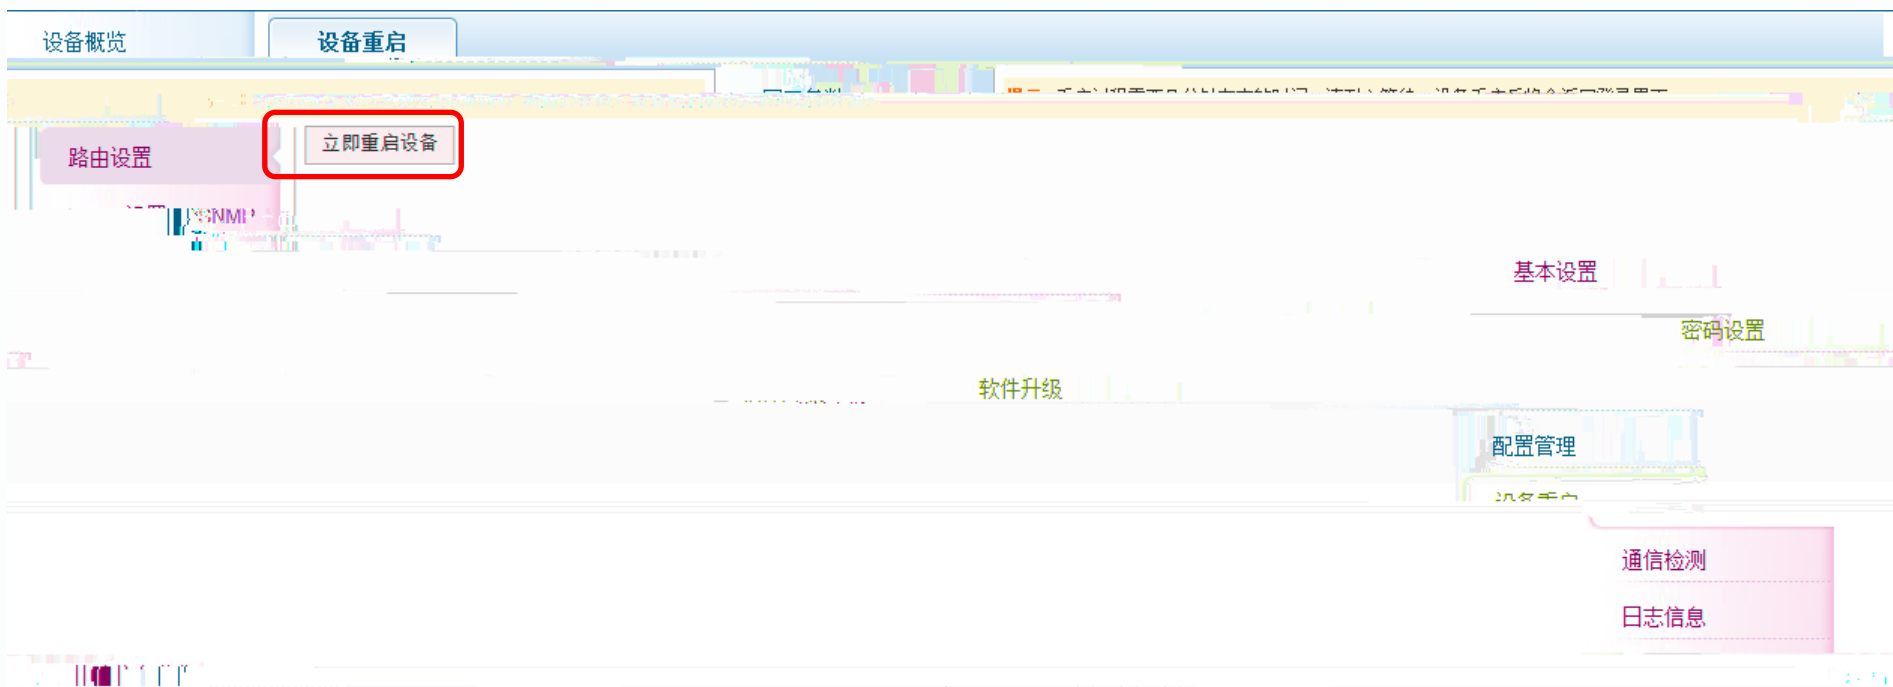

WEB

Ping

icmp

Traceroute

4G

WEB

WEB

设备概览

系统日志

网口参数

显示系统日志

路由设置

SNMP设置

基本设置

密码设置

软件升级

配置管理

```
File name: rrsr820-tlog.txt, size 128 Kbytes, have written 8 files
Standard format: false
```

通信检测

日志信息

通信信息收集

Ruijie

WEB

“ ”

CPU

设备概览

故障信息收集

网口参数

非传输故障信息

路由设置

SNMP设置

基本设置

System start time : 2014-08-04 15:50:17

密码设置

软件升级

System BOOT version : 10.4(3b13)T19 Release(175810)

```
---Collect Information: show version START---  
System description      : Ruijie RSR10-01G-TD-LTE By Ruijie Networks.  
System uptime          : 11:18:29:52...  
System hardware version : 1.00  
System software version : 10.4(3b13)T19 Release(175810)
```

---show version END---

日志信息

故障信息收集




Ruijie

WEB

APP


CLI

APP

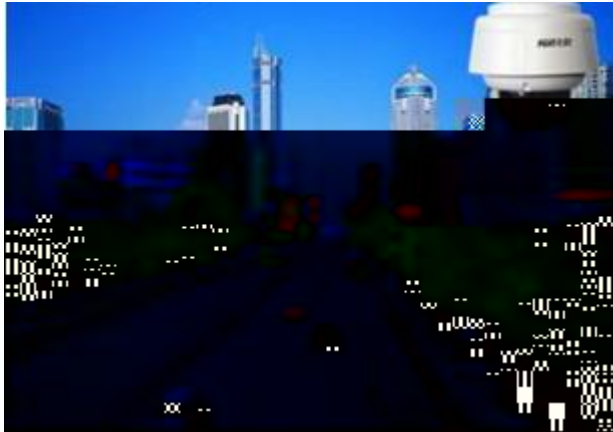

1

2

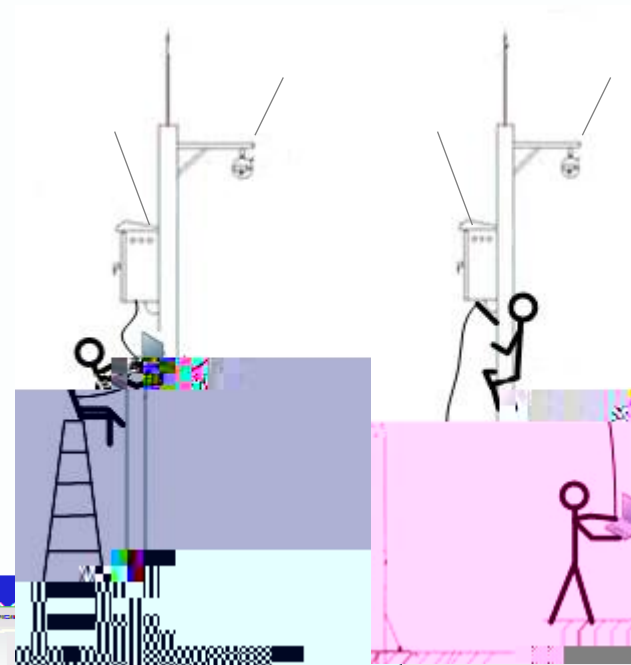

**RSR10-01G-TD-
LTE RSR820-T/820-T(A)**

Ruimo

APP

Android

“

” APP

Android

<http://bnm.ruijie.com.cn>

“

”



APP

10



“ 1234 ”



APP



APP

4G
4G
SIM
CPU

4G

APP

.text

SD


“

”





APP

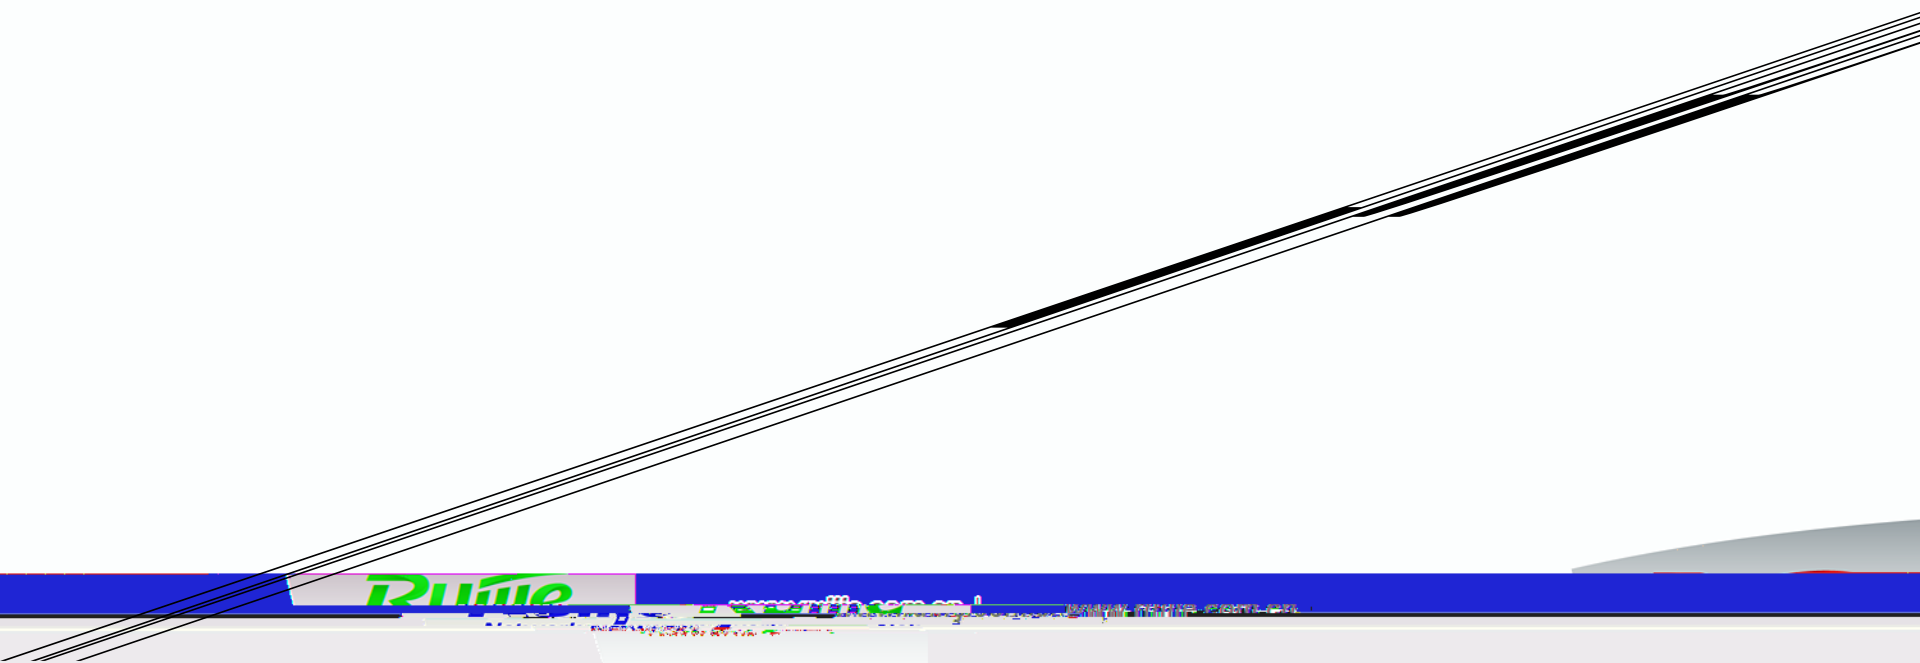

APP

ICMP

4G

XX

4G

APP





APP

CLI

CLI

- 1
- 2
- 3
- 4
- 5

APP

APP

IP



I

APP

APP
txt

2G/3G/4G



APP

wifi

10

10

ruijie

ruijie


1234

0000



I

APP

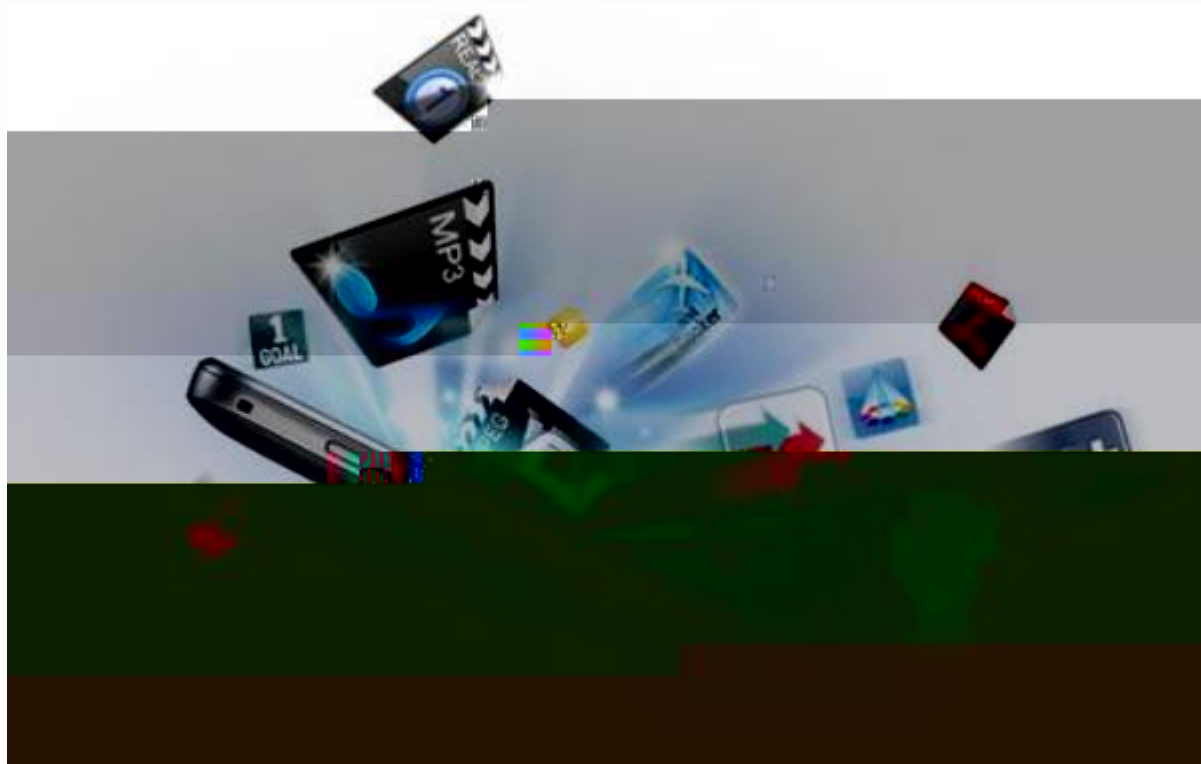

APP



RUNTO

www.runto.com

Runto - the future of mobile

WEB

APP

CLI

CLI

CLI

RSR820

RGOS

CLI

RGOS

CPU

show cpu cpu

Ruijie#show cpu

=====

CPU Using Rate Information

CPU utilization in five seconds: 12.12%

CPU utilization in one minute : 12.07%

CPU utilization in five minutes: 12.07%

show memory

Ruijie#show memory

System Memory Statistic:

Free pages: 54998

watermarks : min 2140, lower 4025, low 5910, high 7795

System Total Memory : 512MB, Current Free Memory : 225428KB

Used Rate : 57%

1

```
show interface
```

CLI

show log
UP/DOWN DOWN d -

flash

flash

Ruijie(config)#logging file flash:log 2000000 7 // 记录到flash



WEB

WEB IP

WEB

WEB

console

WEB

IP

IP

<http://192.168.1.1>

Ruijie#show ip interface brief

Interface	IP-Address(Pri)	IP-Address(Sec)	Status	Protocol
VLAN 1	192.168.57.92/24	no address	up	up
Tunnel 1	2.2.2.2/24	no address	up	down
Cellular 0/0	no address	no address	down	down

console

Ruijie#show service

.....

web-server : enabled

web-server(https): enabled

Ruijie



console

console

PC

COM

Console

console



WEB

console

%Now Begin Download File FileList.txt From 192.168.64.1 to 192.168.64.78

send download request.

send download request.

.....

RGOS

TFTP

“

BOOT

”




show slot



WEB

WEB

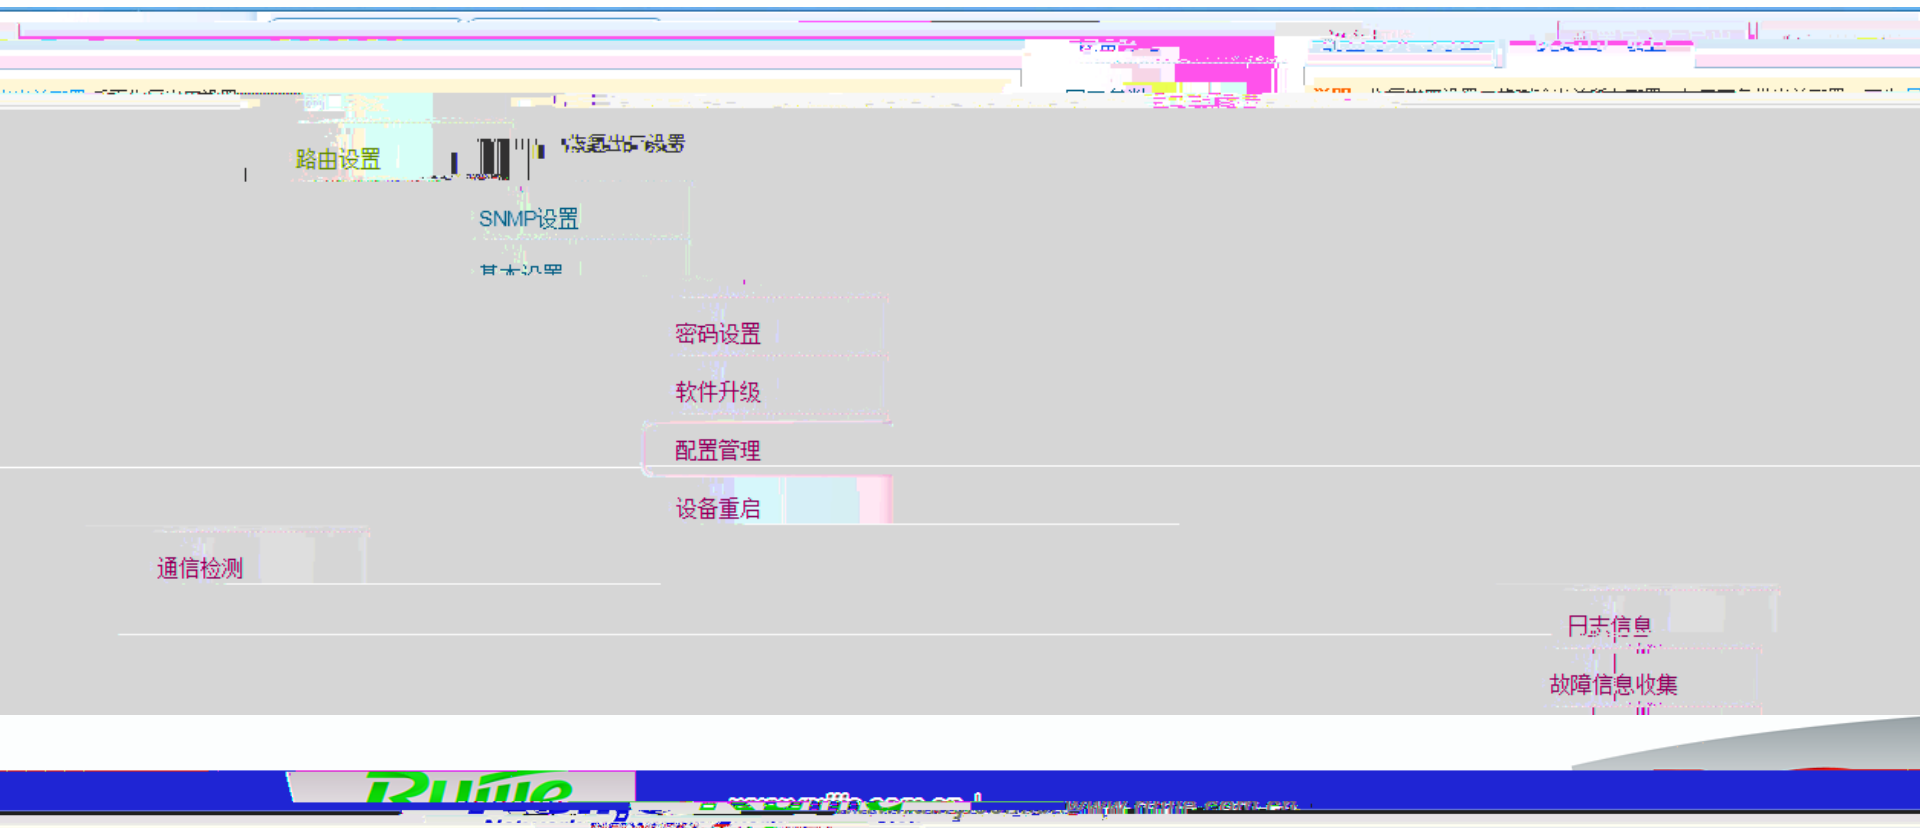

MAIN

Ruijie#dir

Directory of flash:/

Mode	Link	Size	MTime	Name
1		2363	2013-01-15 10:07:19	config.text
1		15107168	2013-01-15 09:47:59	rgos.bin

.....

Ruijie#copy flash:config.text flash:config.bak// config.bak

Ruijie#delete config.text //

Are you sure you want to delete " config.text " ?[No/yes]yes //

Ruijie#reload //

Proceed with reload? [no]y //

BOOT

console

“ Press Ctrl+C to enter Boot ”

ctrl+c

boot

BootLoader>dir

Directory of flash:/

Mode	Link	Size	MTime	Name

1		512	2013-01-09 23:07:03	Boot_hotcmd.cfg
1		2363	2013-01-15 10:07:19	config.text
.....				
1		15107168	2013-01-15 09:47:59	rgos.bin



BOOT

BootLoader>rename config.text config.bak // config.bak

BootLoader>delete config.text //

BootLoader>load //

.....





WEB

WEB

“ ”

“ ”

“ ”

注意事项:

件升级可以系统固件 (*.bin), 升级完成后必须重
件升级可以升级WEB (升级), 升级完成后需要

硬件版本:	1.00
软件版本:	RGOS
WEB版本:	1.1.3(1

注意事项:

件升级可以系统固件 (*.bin), 升级完成后必须重
件升级可以升级WEB (升级), 升级完成后需要

硬件版本:	1.00
软件版本:	RGOS
WEB版本:	1.1.3(1

版本信息

TE_10.4(3b13)T19_R17703	浏览...
-------------------------	-------

进度: 100%

信息: 升级成功。

级

软件升级

配置管理

设备重启

升级

状态

开始升

故障信息收集

日志信息

MAIN

	PC	IP		PC
PC	TFTP			TFTP
	TFTP		FLASH	

copy tftp://[pc_ip]/[file_name] flash:rgos.bin

Ruijie#copy tftp://1.1.1.1/rgos.bin flash:rgos.bin

1.1.1.1 PC

BOOT

PC

TFTP

TFTP

ctrl+C

ROM

TFTP



RUNTO

www.runto.fi

Runto on osa Runto Oy:stä

www.ruijie.com.cn

www.ruijie.com.cn/service.aspx

support.ruijie.com.cn

webchat.ruijie.com.cn

4008-111-000