







111



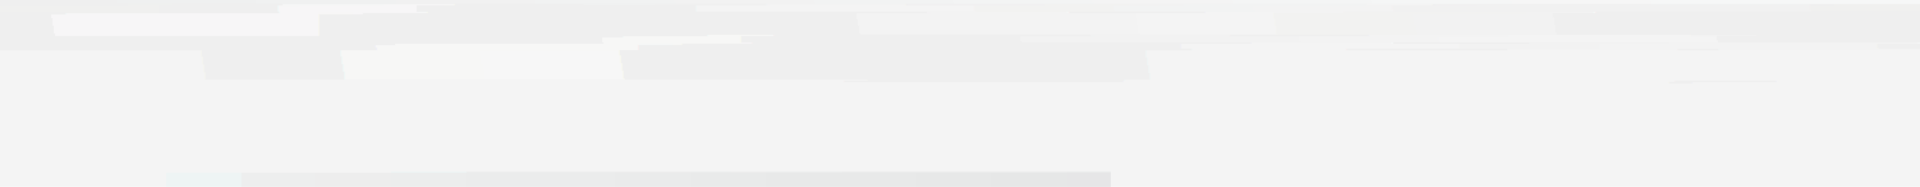

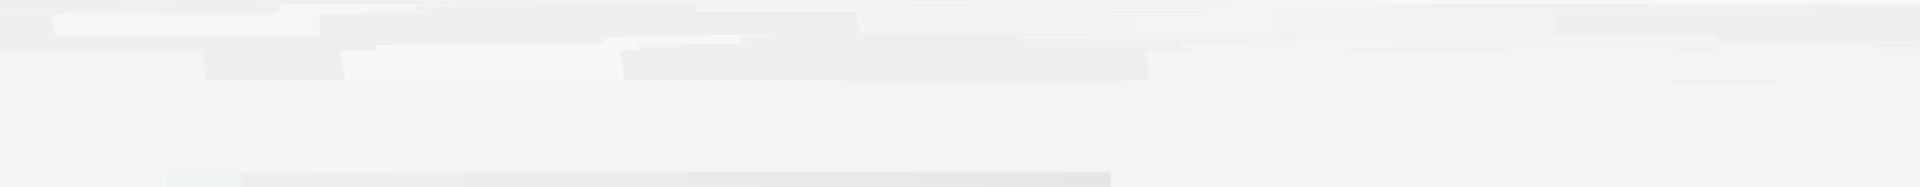

+

```
Ruijie(config)#wlan-config 1 SSID-ALL  \ \      +ssid
Ruijie(config)#ap-group default
Ruijie(config-group)#interface-mapping 1 10  \ \      wlan  vlan      AP
```

```
Ruijie(config)#wlan-config 1 SSID-Slot1
Ruijie(config)#wlan-config 2 SSID-Slot2
```

.....

```
Ruijie(config)#wlan-config 24 SSID-Slot24
Ruijie(config)#ap-group default
Ruijie(config-group)#interface-mapping 1 10 radio 1
Ruijie(config-group)#interface-mapping 1 10 radio 2
Ruijie(config-group)#interface-mapping 2 10 radio 3
Ruijie(config-group)#interface-mapping 2 10 radio 4
```

.....

```
Ruijie(config-group)#interface-mapping 24 10 radio 47
Ruijie(config-group)#interface-mapping 24 10 radio 48
```

+

```
Ruijie(config)#wlan-config 1 SSID-2.4G
```

```
Ruijie(config)#wlan-config 2 SSID-5.8G
```

```
Ruijie(config)#ap-group default
```

```
Ruijie(config-group)#interface-mapping 1 10 radio 802.11b \\802.11b 2.4G
```

```
2 10 radio 802.11a \\802.11a 5.8G
```

AP
vlan


AP

AP

AP

AP

ssid,

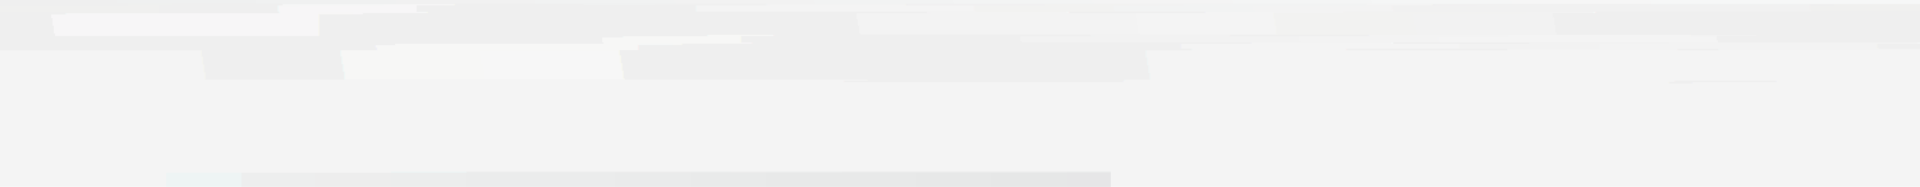

AP

AM5528	AP	AM5528-Slot-3
Ruijie(config)#ap-config AM5528 \\	AP	
Ruijie(config-ap)#slot 3		AM5528-Slot-3

AM5528	AP	
Ruijie(config)#ap-config AM5528 \\	AP	
Ruijie(config-ap)#reset slot 3		



III

IV

1)	AM5528	AP	6	149			
	show ap-config slot <i>ap-name</i>		AP			Radio ID	
	Ruijie(config)#ap-config AM5528						
	Ruijie(config-ap)#channel 6 radio 5						
	Ruijie(config-ap)#channel 149 radio 6						
2)	AM5528	AP	2.4G	30%	5.8G	35%	
	Ruijie(config)#ap-config AM5528						
	Ruijie(config-ap)#power local 30 radio 802.11b						
	Ruijie(config-ap)#power local 35 radio 802.11a						

	802.11a	802.11b		power	chan-width
response-rssi	country	ampdu-rts	beacon rate		



AP

AP AP

Ruijie(config)#ap-config AM5528

Ruijie(config-ap)# led on slot 1

no led on

AP

AP




AP

AM5532

AM5532	25~32				4
	4				
1	mixed	2	2		27 28 /31 32
2	4GE	4	25~28	4	29~32
3	4SFP+	4	29~32	4	

AM5532

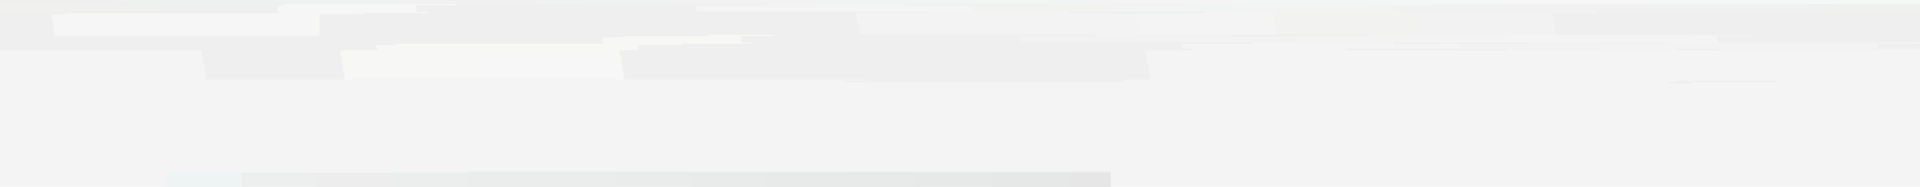

AM5528(EP)& MAP752(T)

VLAN

MAP752(T) ibeacon AC ibeacon uuid uuid major major
minor minor radio slotid AP radio
AP radio ibeacon ibeacon
+

MAP752(T) + IOTP +
DHCP OPTION 224 IOTP AP IOTP
ibeacon IOTP IOTP AC ibeacon
AP IOTP IOTP
+

AP AP AM5528(EP)
MAP752(T) AM5528(EP)
AM5528 MAP752(T)

www.ruijie.com.cn

www.ruijie.com.cn/service.aspx

support.ruijie.com.cn

webchat.ruijie.com.cn

4008-111-000