


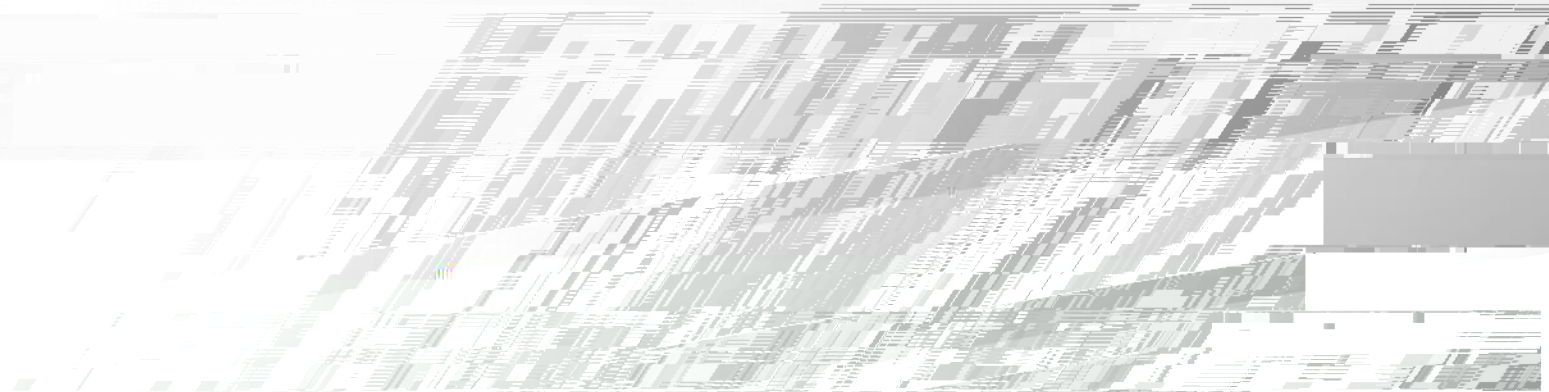

$$\begin{array}{ccccccc} \downarrow \text{W} \tilde{\text{A}} & \sim & \uparrow & \downarrow \uparrow \text{"A} & \downarrow \text{[OBJ]} & \sim & \downarrow \\ \text{[OBJ]} & \downarrow & & & & & \end{array}$$

í ì WAN

1. ř í

1. $\frac{1}{2}$

2. URL

↓ URL ● ↑ "A" [OBJ] ↓ í

URL IDP $\rightarrow$ "A" $\rightarrow$  URL URL 

URL IDP B A [OBJ] URL

URL 1 IDP: B 7 "A • 7 ≠ 1 [OBJ]URL ◆

↓ 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

1. 配置 eth1 接口 IP 地址为 10.2.4.5/21
2. 配置 eth0 接口 IP 地址为 20.1.1.1/24
3. 配置 eth1 接口 IP 地址为 10.2.4.5/21




í í ɹ í í ʹ ɹ ʹ ɹ
í í ʹ ɹ profile1


í í 丩



↑ í 丩 Ƶ apppolicy1

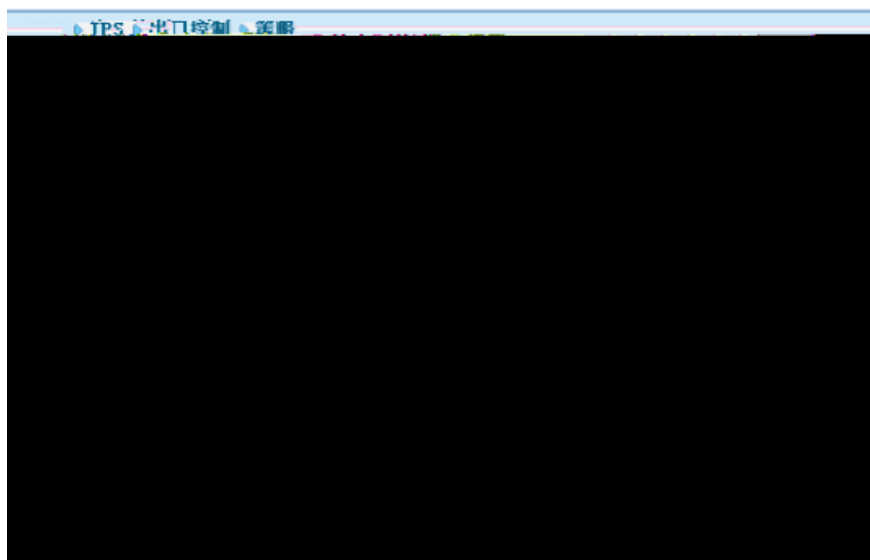

í î ð

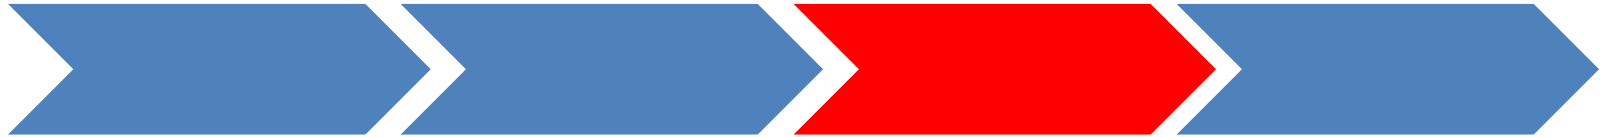

URL • ð ù URL ~ URL • ð ð URL • M ð
URL ~

1. URL~ Whitelist1, ð "A URL www.sina.com.cn
www.google.com.hk

2. Blacklist1, ð ð "A URL www.msn.com
www.aol.com

► IPS ► 出口控制 ► URL过滤 ► 黑白名单

名称 Whitelist1 *

描述

类型 白名单

URL列表 (总数: 2)

URL	描述
www.sina.com.cn	
www.google.com.hk	

► IPS ► 出口控制 ► URL过滤 ► 黑白名单

名称 Blacklist1 *

描述

黑名单


表 (总数: 2)

描述	启用
	✓
	✓

URL列表

URL
www.msn.com
www.aol.com

1 2 3

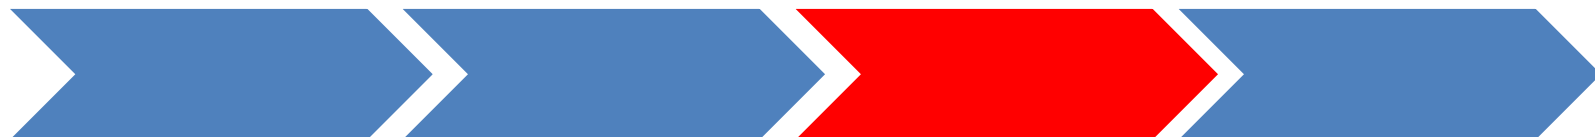

URL 1 2 3

1 [OBJ] 2 3 4 1 URL 5

IPS > 出口控制 > URL过滤 > 防护配置

名称 *

描述


☒ 启用 ☐ 禁用

☒ 启用 ☐ 禁用

☒ 启用 ☐ 禁用

名称	状态	分类	备注
标题广告和弹出式广告)的	☒	广告	提供广告图片或其他广告内容文件(网站。
服务的网站。	☒	烟酒	推销烟酒相关产品或


1 2 3

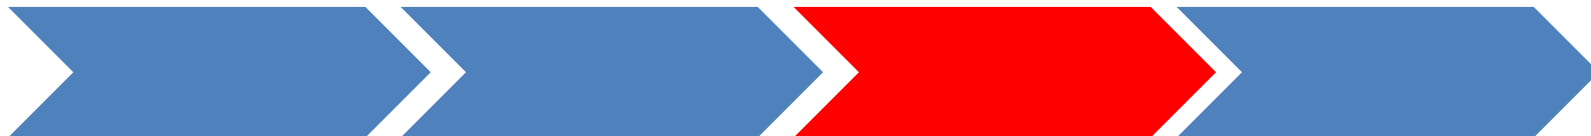

URL 1 2 3

1. 1 2 3 WAN URL 1 2 3

2. URL 1 2 3 urlpolicy1 1 2 3

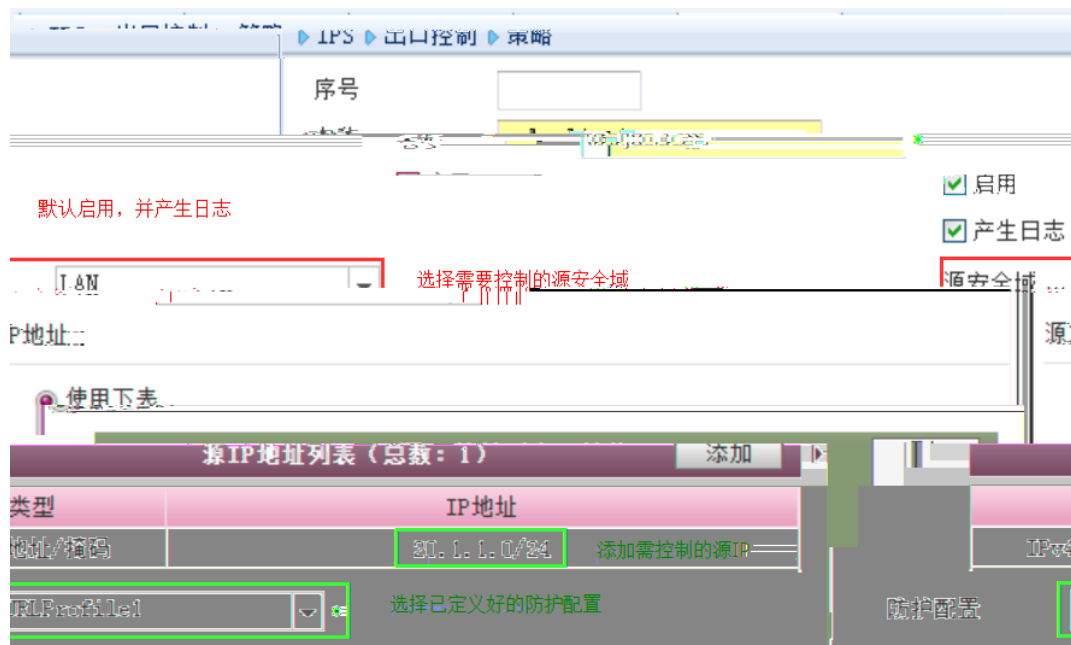

í ĩ ĵ



˘ í ĩ í

1. ě Google-Talk Skype ĩ ˘ ẹ ɣ˘ ẹ

2. ˘O ~ Google-Talk Skype

1 ĩ Ä

˘ í URL •

1. ĵ ĩ ˘A ǎ www.google.com.hk www.sina.com.cn

2. ĵ ĩ ˘A www.msn.com www.aol.com ˘Hó~ URL Ä

3. ǎ 1 1 ĵ URL 1 • ĩ Ä

4. ˘O ↑ ~ URL ˘ 1 Ä ǎ

ÿ [OBJ] ĩ Œ Ụ URL • ˘H'YW ĵ



ï € ... F å

Ø ¢ u

Ô ‘ y f u

î , [Ä à ï € * IDP ; û à g * ’ k 4 + ï € ¶ g ... k ’
ò t U Y F å , • ï € ... k o x à Ž d y g IPShož

“A 1 ” “ ”



“O ”O WAN “A 1 ” “ ”

► IPS ► 客户端防护 ► 策略

安全域 *

☒ 开 保护此安全域的客户端

“A 4 ” “i ” “j ”



A “A 4 ” “i ” “j ” clientpolicy1 “A 4 IP “O 4 IPS “A 4
“i ” “w—

IPS 安全策略配置 策略

名称 clientpolicy1

☒ 启用

☒ 产生日志

客户端IP地址

☐ 任意

☐ 任意IPv4地址

☐ 任意IPv6地址

☒ 使用下表

IP地址
20.1.1.0/24

客户端IP地址 (总数: 1) 添加


中

中 高 自定义 Client_Media

IPS 关闭 低

A "A 1 ĩ M x clientpolicy1 J ĩ [OBJ] ĩ ò J



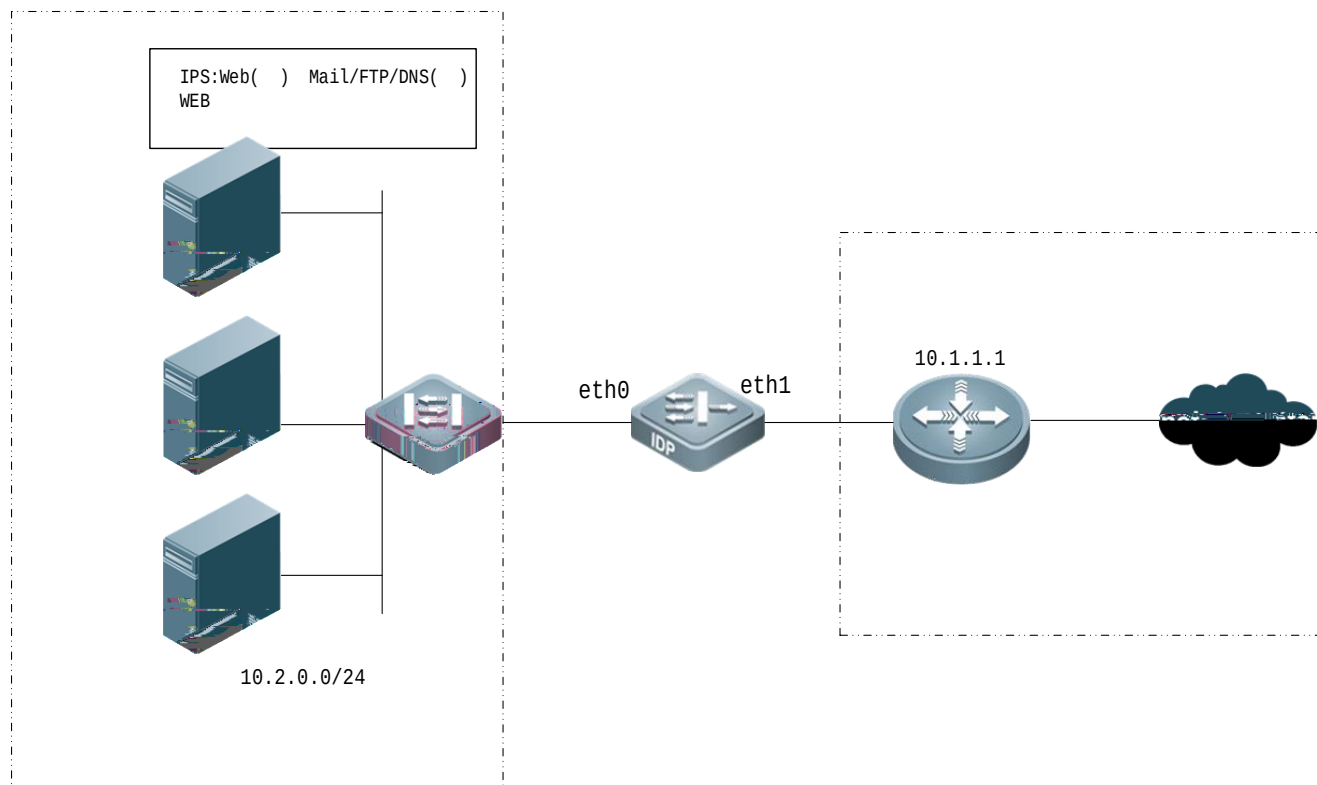

- IDP LAN Web FTP DNS OBJ 1 1

LAN 或 DMZ

LAN 或 DMZ

1.

0 1 1 1



1. 0 0 0 1

安全域 wan *

☒ 开 保护此安全域的客户端

2. A M y

The screenshot displays the configuration page for a mail policy named 'mailpolicy'. The '名称' (Name) field is 'mailpolicy' with a red asterisk indicating it is required. The '启用' (Enable) and '产生日志' (Generate Log) checkboxes are checked. Below this, there is a table with columns 'IP地址' (IP Address) and '类型' (Type). The table contains one entry with an IP address '10.0.0.0/24' and a type 'Mail_Server'. To the right of the table, there are three checkboxes, all of which are unchecked. Below the table, there is a section for 'IPS' with a slider set to '中' (Medium) and buttons for '关闭' (Close), '低' (Low), '中' (Medium), '高' (High), and '自定义' (Custom). The 'Mail_Server' dropdown is also visible. At the bottom, there is a field for '最大受保护邮件' (Maximum protected email) set to '10' with a red asterisk and the text '(1-10) MB'. The '启用邮件防护' (Enable email protection) checkbox is checked.



1. 0 0 FTP 0 1 2 3

2. A 1 2 3

IPS FTP安全防护

名称

ftppolicy *

☒ 启用
 ☒ 产生日志

受保护的服务器列表 (总数: 1)

添加

类型	IP地址
IPv4地址/掩码	10.2.0.0/21

FTP服务器

IPS

中

关闭

低

中

高

自定义

FTP_Server_1

1. “O

”O



1. **IPS>** >
- 2.
- 3.

IPS > 邮件安全防护 > 邮件防护

▼ 信息泄露防护

☒ 产生日志

☒ 将SMTP服务器标题信息替换为

Mail Server Ready...

(0-256)

☒ 将POP3服务器标题信息替换为

Mail Server Ready...

(0-256)

☒ 将IMAP服务器标题信息替换为

Mail Server Ready...

(0-256)



Ω

└

Ω

W

└ [OBJ] ┘

└ 〃 [OBJ] Ω

〃A Ω

└ Ω

└ [OBJ] Ω 1 Ω

1. DoS

2. 〃 〃

3. TCP 〃

4. IP >

5. ICMP Ω

Ω ī Ω
◇ IP[OBJ]tcp syn

ì Ω

Ω Y
π α √ l ◇

TCP SYN cookie Ω Ω
Ω [OBJ]H

► 攻击防御 ► 攻击防御 ► DoS防御

将下列设置应用于安全域

wan

☒ ICMP泛滥

阈值 10000 *pps

☒ 报警 ☒ 丢弃

☒ TCP SYN泛滥

阈值 100000 *pps

☒ 报警 ☒ 丢弃

☒ UDP泛滥

阈值 100000 *pps

☒ 报警 ☒ 丢弃

☒ DNS泛滥

阈值 100000 *pps

☒ 报警 ☒ 丢弃

☐ TCP RST扫描

☐ 报警 ☐ 丢弃

报警 ☒ 丢弃

报警 ☒ 丢弃

☒ 丢弃

☒ 丢弃

☒ LAND

☒ Smurf

☒ Ping of Death

☒ Teardrop

☐ TCP SYN Cookie

确定

取消

▶ 攻击防御 ▶ 攻击防御 ▶ 探测防御

将下列设置应用于安全域

wan

The following table shows the results of the regression analysis for the dependent variable "Number of employees" (in thousands) for the independent variable "GDP per capita" (in thousands of dollars).

363

— 11 —

The reaction scheme shows a 1,2-diol (ethylene glycol) reacting with a ketone (acetone) in the presence of an acid catalyst (H⁺) to form a cyclic acetal (1,3-dioxolane). The reaction is reversible.

☒ TCP SYN端口扫描

國值 1 *秒

☒ 报警 ☒ 丢弃☒ TCP FIN扫描☒ 报警 ☒ 丢弃☒ TCP XMAS扫描☒ 报警 ☒ 丢弃☒ TCP NULL扫描☒ 报警 ☒ 丢弃

☒ 设置TCP SYN和FIN标志

☒ 丢弃

☒ 无ACK标志的TCP FIN标志

☒ 丢弃☒ 非SYN标志☒ 丢弃

确定

取消



i

'A ð

1

2

Rufie



 $\dot{\omega}$ 

- 访问锐捷网络官方网站 www.ruijie.com.cn

- 访问锐捷网络服务支持网站
www.ruijie.com.cn/service.aspx

- 访问锐捷网络技术支持网站
support.ruijie.com.cn

- 访问锐捷网络在线客服 webchat.ruijie.com.cn

- 拨打锐捷网络服务热线 4008-111-000