










C:\RG-
Wlock\tomcat\webapps\javakeeper\download\backupconfig

地址 (D)						
C:\RG-Wlock\tomcat\webapps\javakeeper\download\backupconfig						
名称	大小	类型	修改日期		属性	
.73556.db	91 KB	数据库文件	2017-3-24 17:36	A	201703241	
32602.db	92 KB	数据库文件	2017-3-24 23:26	A	201703242	
32644.db	92 KB	数据库文件	2017-3-24 23:26	A	201703242	


1

“ ”

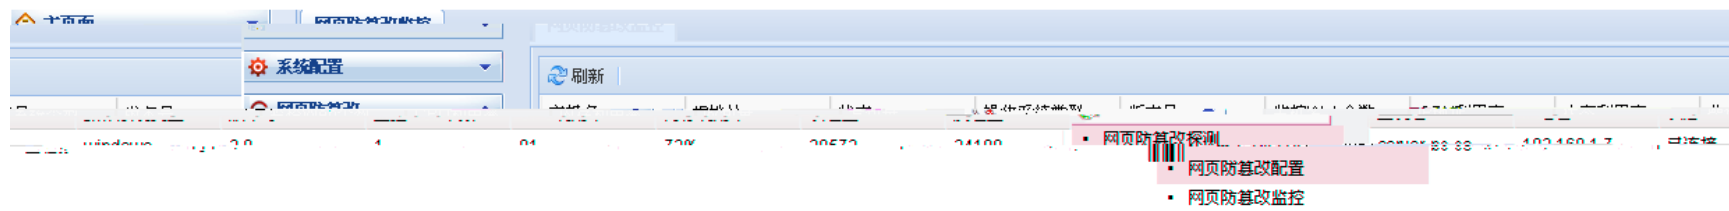

2

“ ”

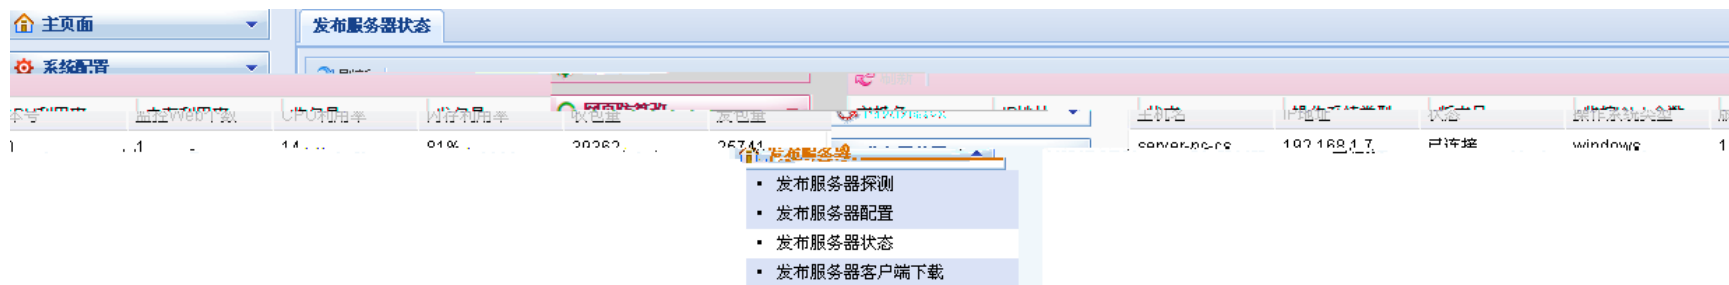

1

/
80%

1

85% 2


60 3

syslog

The screenshot shows a web-based configuration interface for a network device. The top navigation bar includes '主页面' (Home) and '日志配置' (Log Configuration). The left sidebar has '系统配置' (System Configuration) selected, with sub-items like '网页防篡改' (Web Anti-tampering), '发布服务器' (Publish Server), and '日志系统' (Log System). The main content area is titled '日志存储设定/告警' (Log Storage Setting/Alert) and contains two sections: '日志存储设定' (Log Storage Setting) and '本地日志配置' (Local Log Configuration). In the '日志存储设定' section, '日志存储空间(MB):' is set to 5000 and '超出保留天数:' is set to 60. In the '本地日志配置' section, '是否启用:' is set to '是' (Yes) and '类型:' is set to '本地日志' (Local Log). A '刷新' (Refresh) button and a '保存' (Save) button are located at the top right of the configuration area. A small '日志配置' (Log Configuration) tab is visible in the bottom left corner of the main content area.

配置项	当前值
日志存储空间(MB)	5000
超出保留天数	60
是否启用	是
类型	本地日志



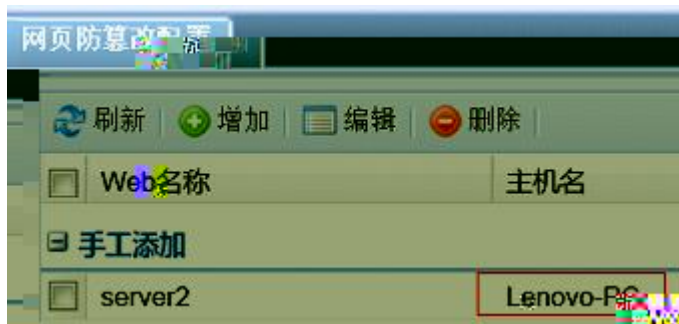

ptables

Window2003

Centos vi /etc/sysconfig/network



UDP 514

UDP

UDP 514





“

”




Pingert

=> Pingert

IP

IP

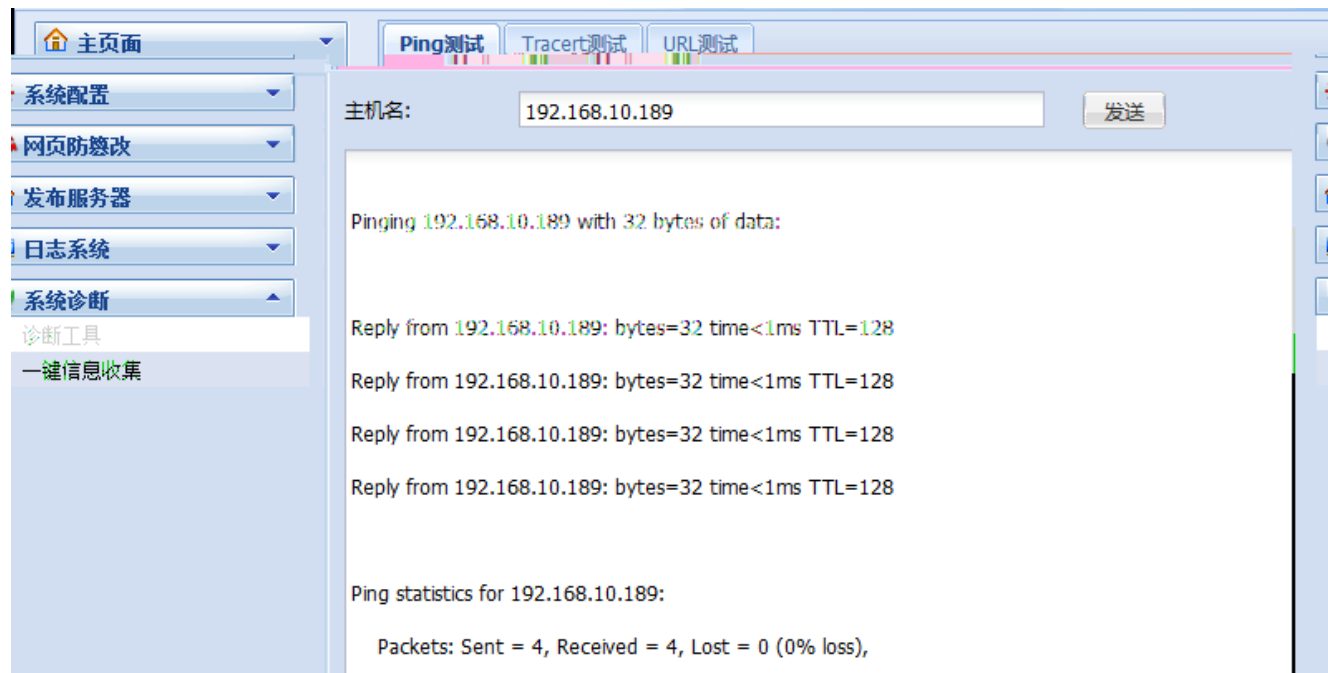



www.ruijie.com.cn

www.ruijie.com.cn/service.aspx

bbs.ruijie.com.cn

webchat.ruijie.com.cn

4008-111-000